
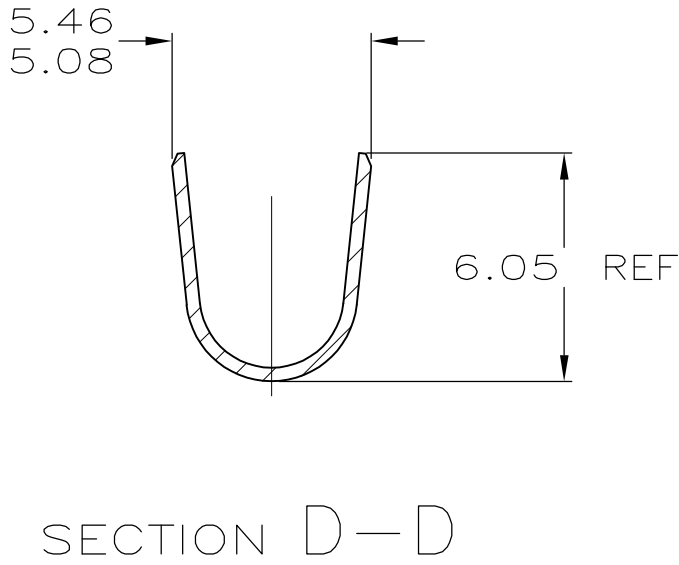
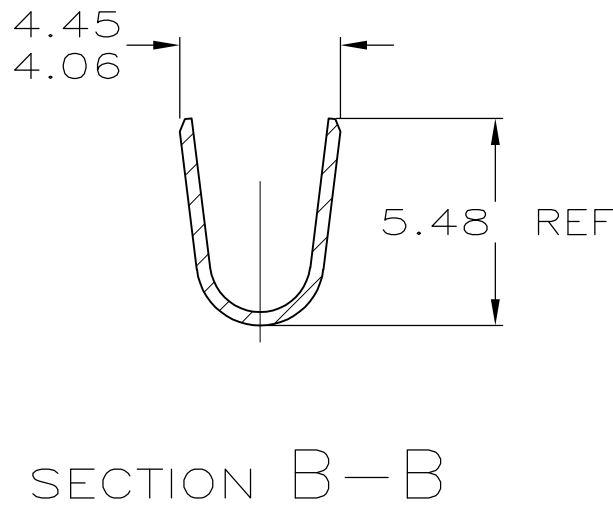
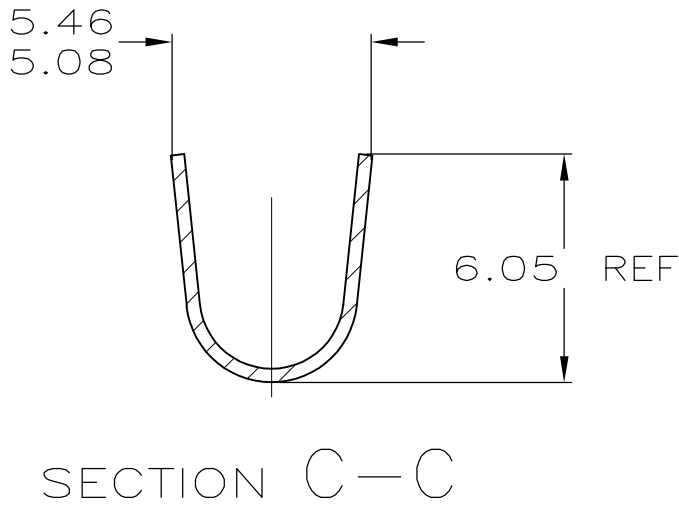
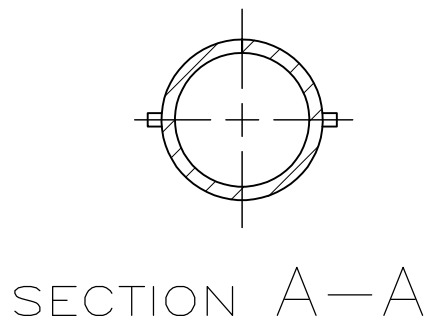


LOC	DIST	REVISIONS					
CM	53	P	LTR	DESCRIPTION	DATE	DWN	APVD
			E1	REVISED PER ECO-11-004917	11MAR11	RK	HMR

1. WIRE RANGE: 2 – 6 mm² (14 – 10 AWG)
2. INSULATION RANGE: 2.54 – 4.57

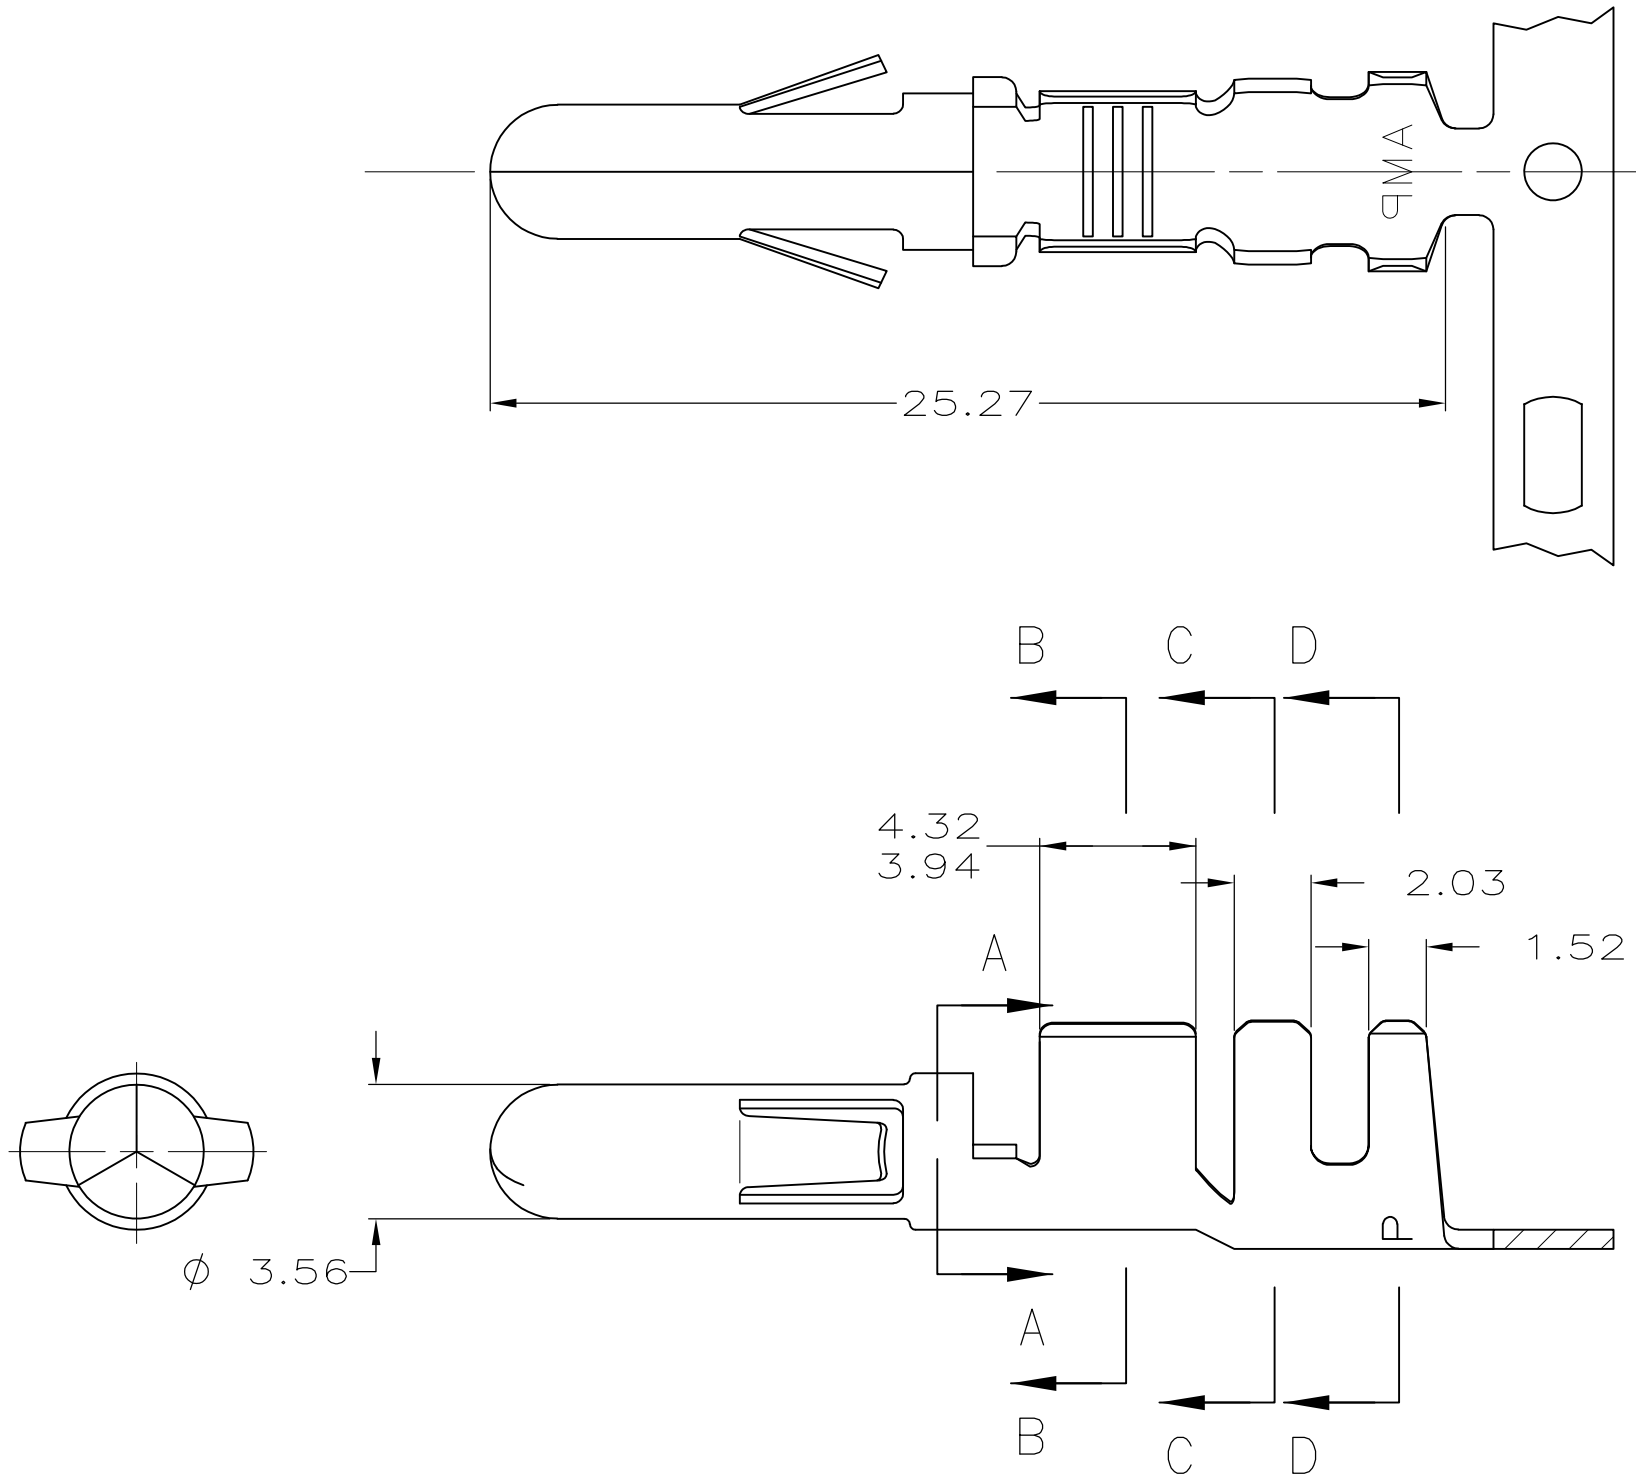

2.03	.080	4.32	.170	5.48	.216	—	—
1.52	.060	4.06	.160	5.46	.215	—	—
0.36	.014	3.94	.155	5.08	.200	—	—
0.35	.014	3.56	.140	4.57	.180	25.27	.995
0.13	.005	2.54	.100	4.45	.175	6.05	.238
MM	IN	MM	IN	MM	IN	MM	IN
CONVERSION TABLE							

METRIC

PRE TIN	0.36 PH BRZ	350201-2
PRE TIN	0.35 BRASS	350201-1
FINISH	MATERIAL	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN T. BECK 29OCT1998	TE Connectivity			
DIMENSIONS: mm		CHK R. SWING 29OCT1998				
		APVD C. MARTIN 16NOV1998	NAME PIN, .140 PIN & SOCKET CONNECTOR			
		PRODUCT SPEC				
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPLICATION SPEC				
0 PLC ± -		—				
1 PLC ± -		—				
2 PLC ± 0.13		—				
3 PLC ± -		—				
4 PLC ± -		—				
ANGLES ± -		—				
FINISH		—				
MATERIAL SEE TABLE		WEIGHT —	SIZE A2	CAGE CODE 00779	DRAWING NO C-350201	RESTRICTED TO —
SEE TABLE		CUSTOMER DRAWING	SCALE 5:1	SHEET 1 of 1	REV E1	