


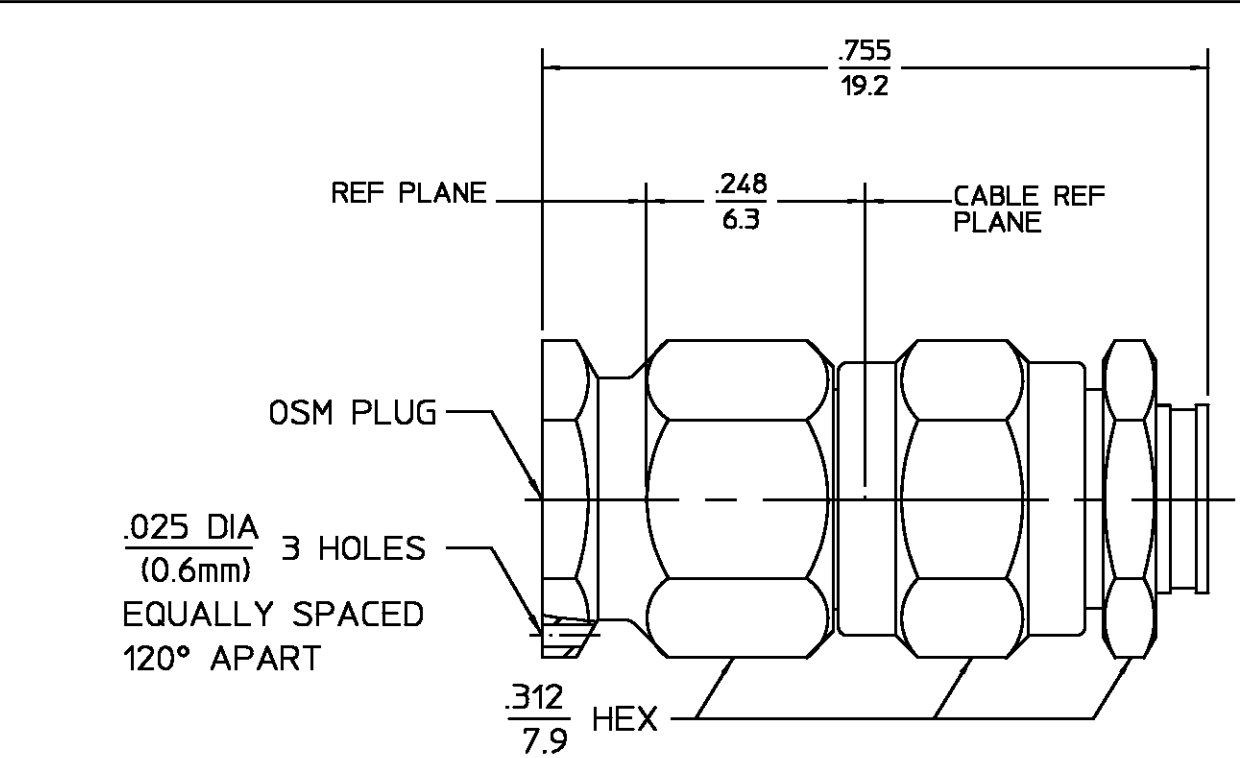

DESIGNED FOR USE WITH	
.085 SEMI-RIGID CABLE	
CABLE ENTRY DIAMETER	
MINIMUM	
CONTACT	.025
SLEEVE	.087

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
010	RELEASED	7/1/94	<i>RA</i>

ELECTRICAL	MECHANICAL	ENVIRONMENTAL
Nominal Impedance (Ohms) <u>50</u>	Interface Dimensions MIL-STD-348A, Fig. <u>310.1</u>	Temperature Rating <u>-65°C to +165°C</u>
Frequency Range (GHz) DC to <u>18.0</u>	Recommended Mating	Vibration MIL-STD-202, Method 204, Condition D.
Volt Rating (VRMS MAX) <u>Sea Level 335</u>	Torque <u>7-10 in-lbs</u>	Shock MIL-STD-202, Method 213, Condition I.
VSWR <u>1.07 + .01 f(GHz)</u>	Mating Characteristics:	Thermal Shock MIL-STD-202, Method 107, Condition B,
Insertion Loss (dB MAX) <u>.03 √f(GHz)</u>	Insertion (MAX Lbs) <u>N/A</u>	Except High Temp +115°C
RF Leakage (dB MIN) <u>-[90-f(GHz)]</u>	Withdrawal (MIN Oz) <u>N/A</u>	Moisture Resistance MIL-STD-202, Method 106
Corona, 70,000 Ft (VRMS MIN) <u>250</u>	Force to Engage and Disengage (In-Lbs MAX) <u>2.0</u>	Corrosion - MIL-STD-202, Method 101, Condition B, 5% salt spray
Dielectric Withstanding Voltage (VRMS MIN) <u>Sea Level 1000</u>	Center Contact Captivation	
Contact Resistance (Milliohms MAX)	Axial (Lbs) <u>6.0</u>	
Center Contact <u>3.0</u>	Radial (In-Oz) <u>N/A</u>	
Outer Contact <u>2.0</u>	Cable Retention	
Cable to Housing <u>0.5</u>	Axial Force (Lbs MIN) <u>30.0</u>	
RF High Potential <u>Sea Level</u>	Torque (In-Oz) <u>16.0</u>	
(VRMS MIN <u>5 MHz</u>) <u>670</u>	Weight (Grams) <u>TBD</u>	
IR.(Megohms MIN) <u>5,000</u>		

HOUSING COUPLING NUT CLAMP NUT	STAINLESS STEEL PER ASTM-A484 AND ASTM-A582, TYPE 303	PASSIVATE PER ASTM-A-380
DIELECTRIC	TFE FLUOROCARBON PER ASTM-D-1457	N/A
CENTER CONTACT	BERYLLIUM COPPER PER ASTM B 196, ALLOY C17300, CONDITION H	GOLD PLATE PER MIL-G-45204
SLEEVE	BRASS PER ASTM-B-16, HALF HARD	GOLD PLATE PER MIL-G-45204
RETAINING RING	BERYLLIUM COPPER PER ASTM B 194, ALLOY C17200, CONDITION H	N/A
GASKET	SILICONE RUBBER PER ZZ-R-765	N/A
COMPONENT	MATERIAL	FINISH
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCE ON FRAC. DEC. ANGLES ± 1/64 ±.005 ± 1°		
DRAWN BY <i>RA</i> DATE 7/1/94 CHECKED BY <i>RA</i> APPD BY <i>RA</i> 7/1/94		
USE ASS'Y PROCEDURE 408-04918 NO. AP20-545		
TITLE OSM STRAIGHT CABLE PLUG- SOLDER CLAMP ATTACHMENT M39012/79-3007 CAT E		
AMP Incorporated 140 Fourth Avenue Waltham, MA 02451-7599		
SIZE B	CODE IDENT NO. 26805	2001-8007-92
SCALE 5 : 1	REV 010	
SHEET 1 OF 1		