

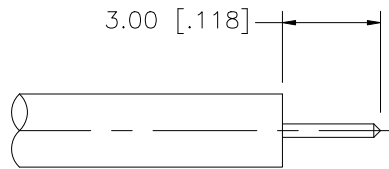


REV.	DATE	DESCRIPTION
NC	06/12/02	INITIAL RELEASE
A	02/25/08	UPDATE DRAWING FORMAT, ADD BODY X-SECTION

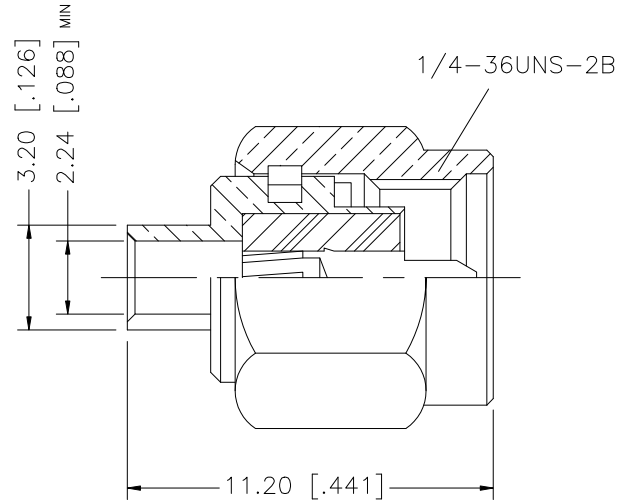

RECOMMENDED
CABLE STRIPPING DIM'S

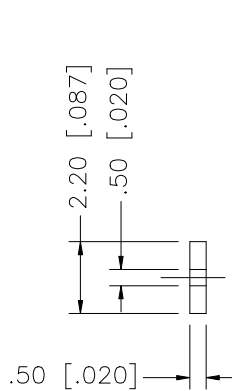

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020”	APPROVALS		DATE		Amphenol Connex					
8						DRAWN	G.R.S.	02/25/08							
7						CHECKED									
6						ISSUED				PART DESCRIPTION SMA SEMI RIGID PLUG (FOR .085”, .086” CABLE)					
5						SHEET	1 OF 1								
4	CONTACT PIN	BER. COPPER	GOLD	1						PART NO. 132248					
3	INSULATOR	TEFLON	NATURAL	1											
2	BODY	BRASS	GOLD	1						DWG. NO. 132248.DWG					
1	COUPLING NUT	PASSIVATED S.S.	GOLD	1											
	DESCRIPTION	MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING	CAD FILE		C:/132/132248.DWG		REV.	A	SIZE	A	SCALE	NA