
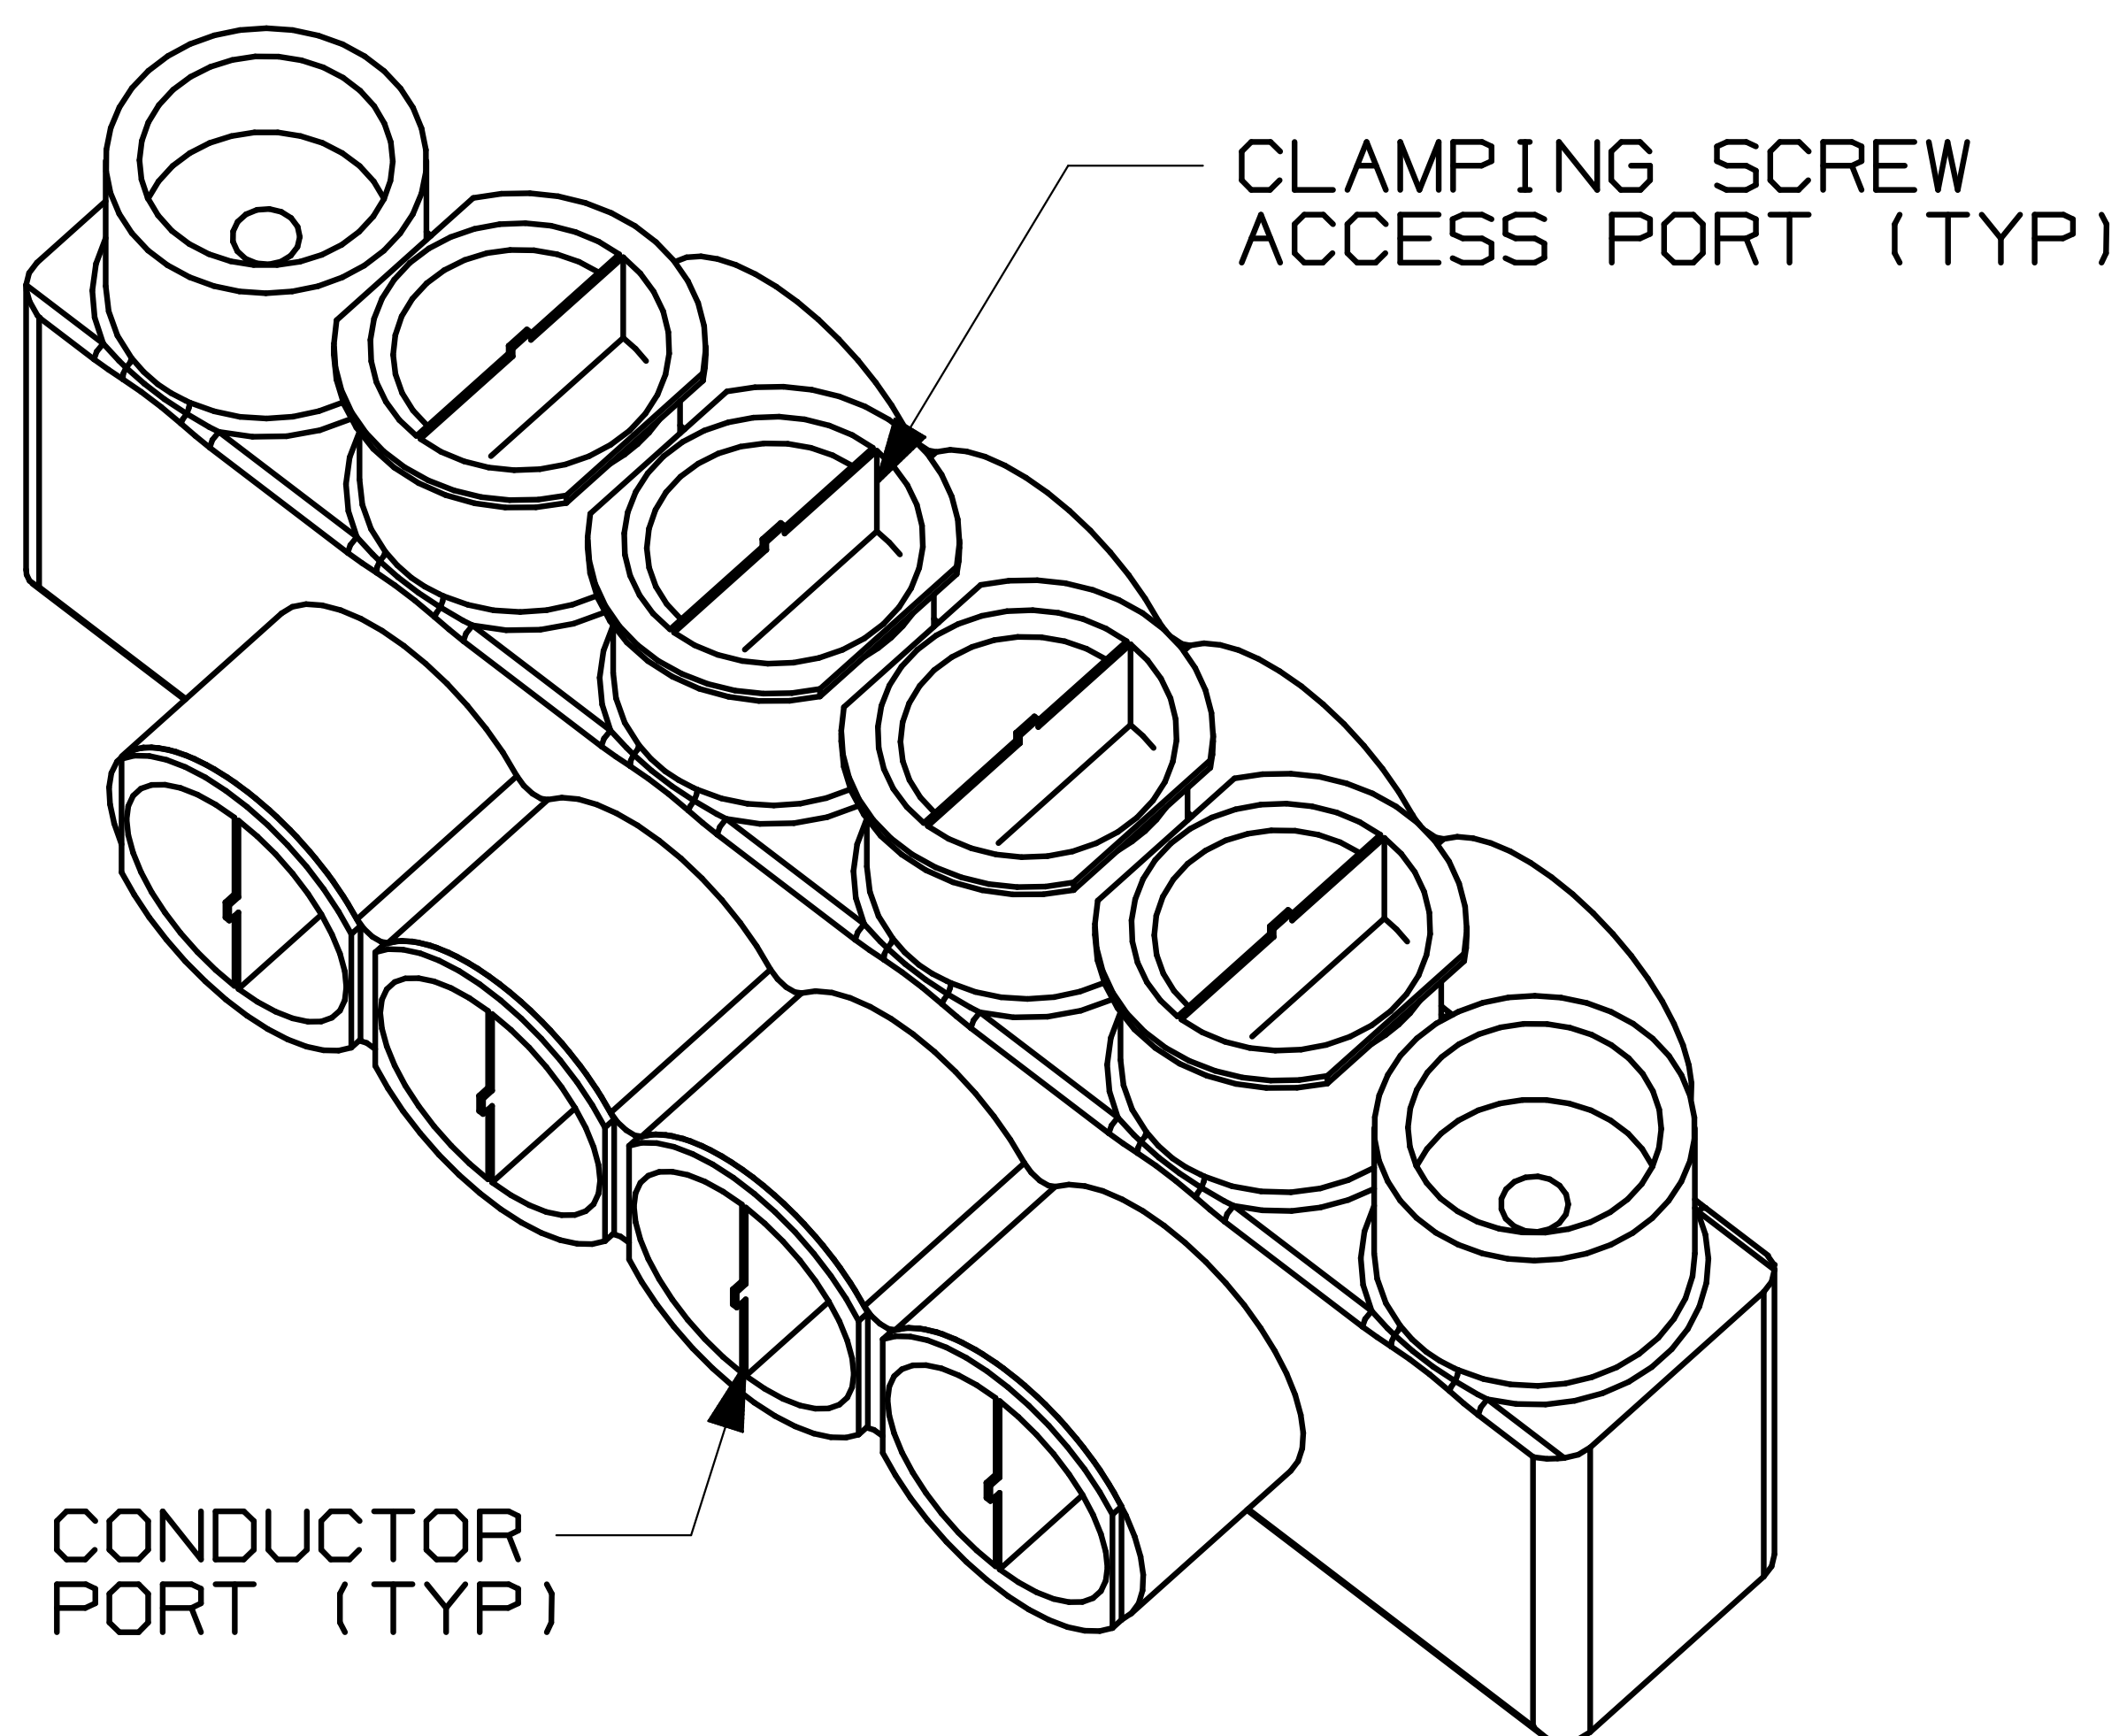


INSULATED MOUNTING HOLE
(ACCOMMODATES 1/4" HARDWARE)
(2 PLCS)

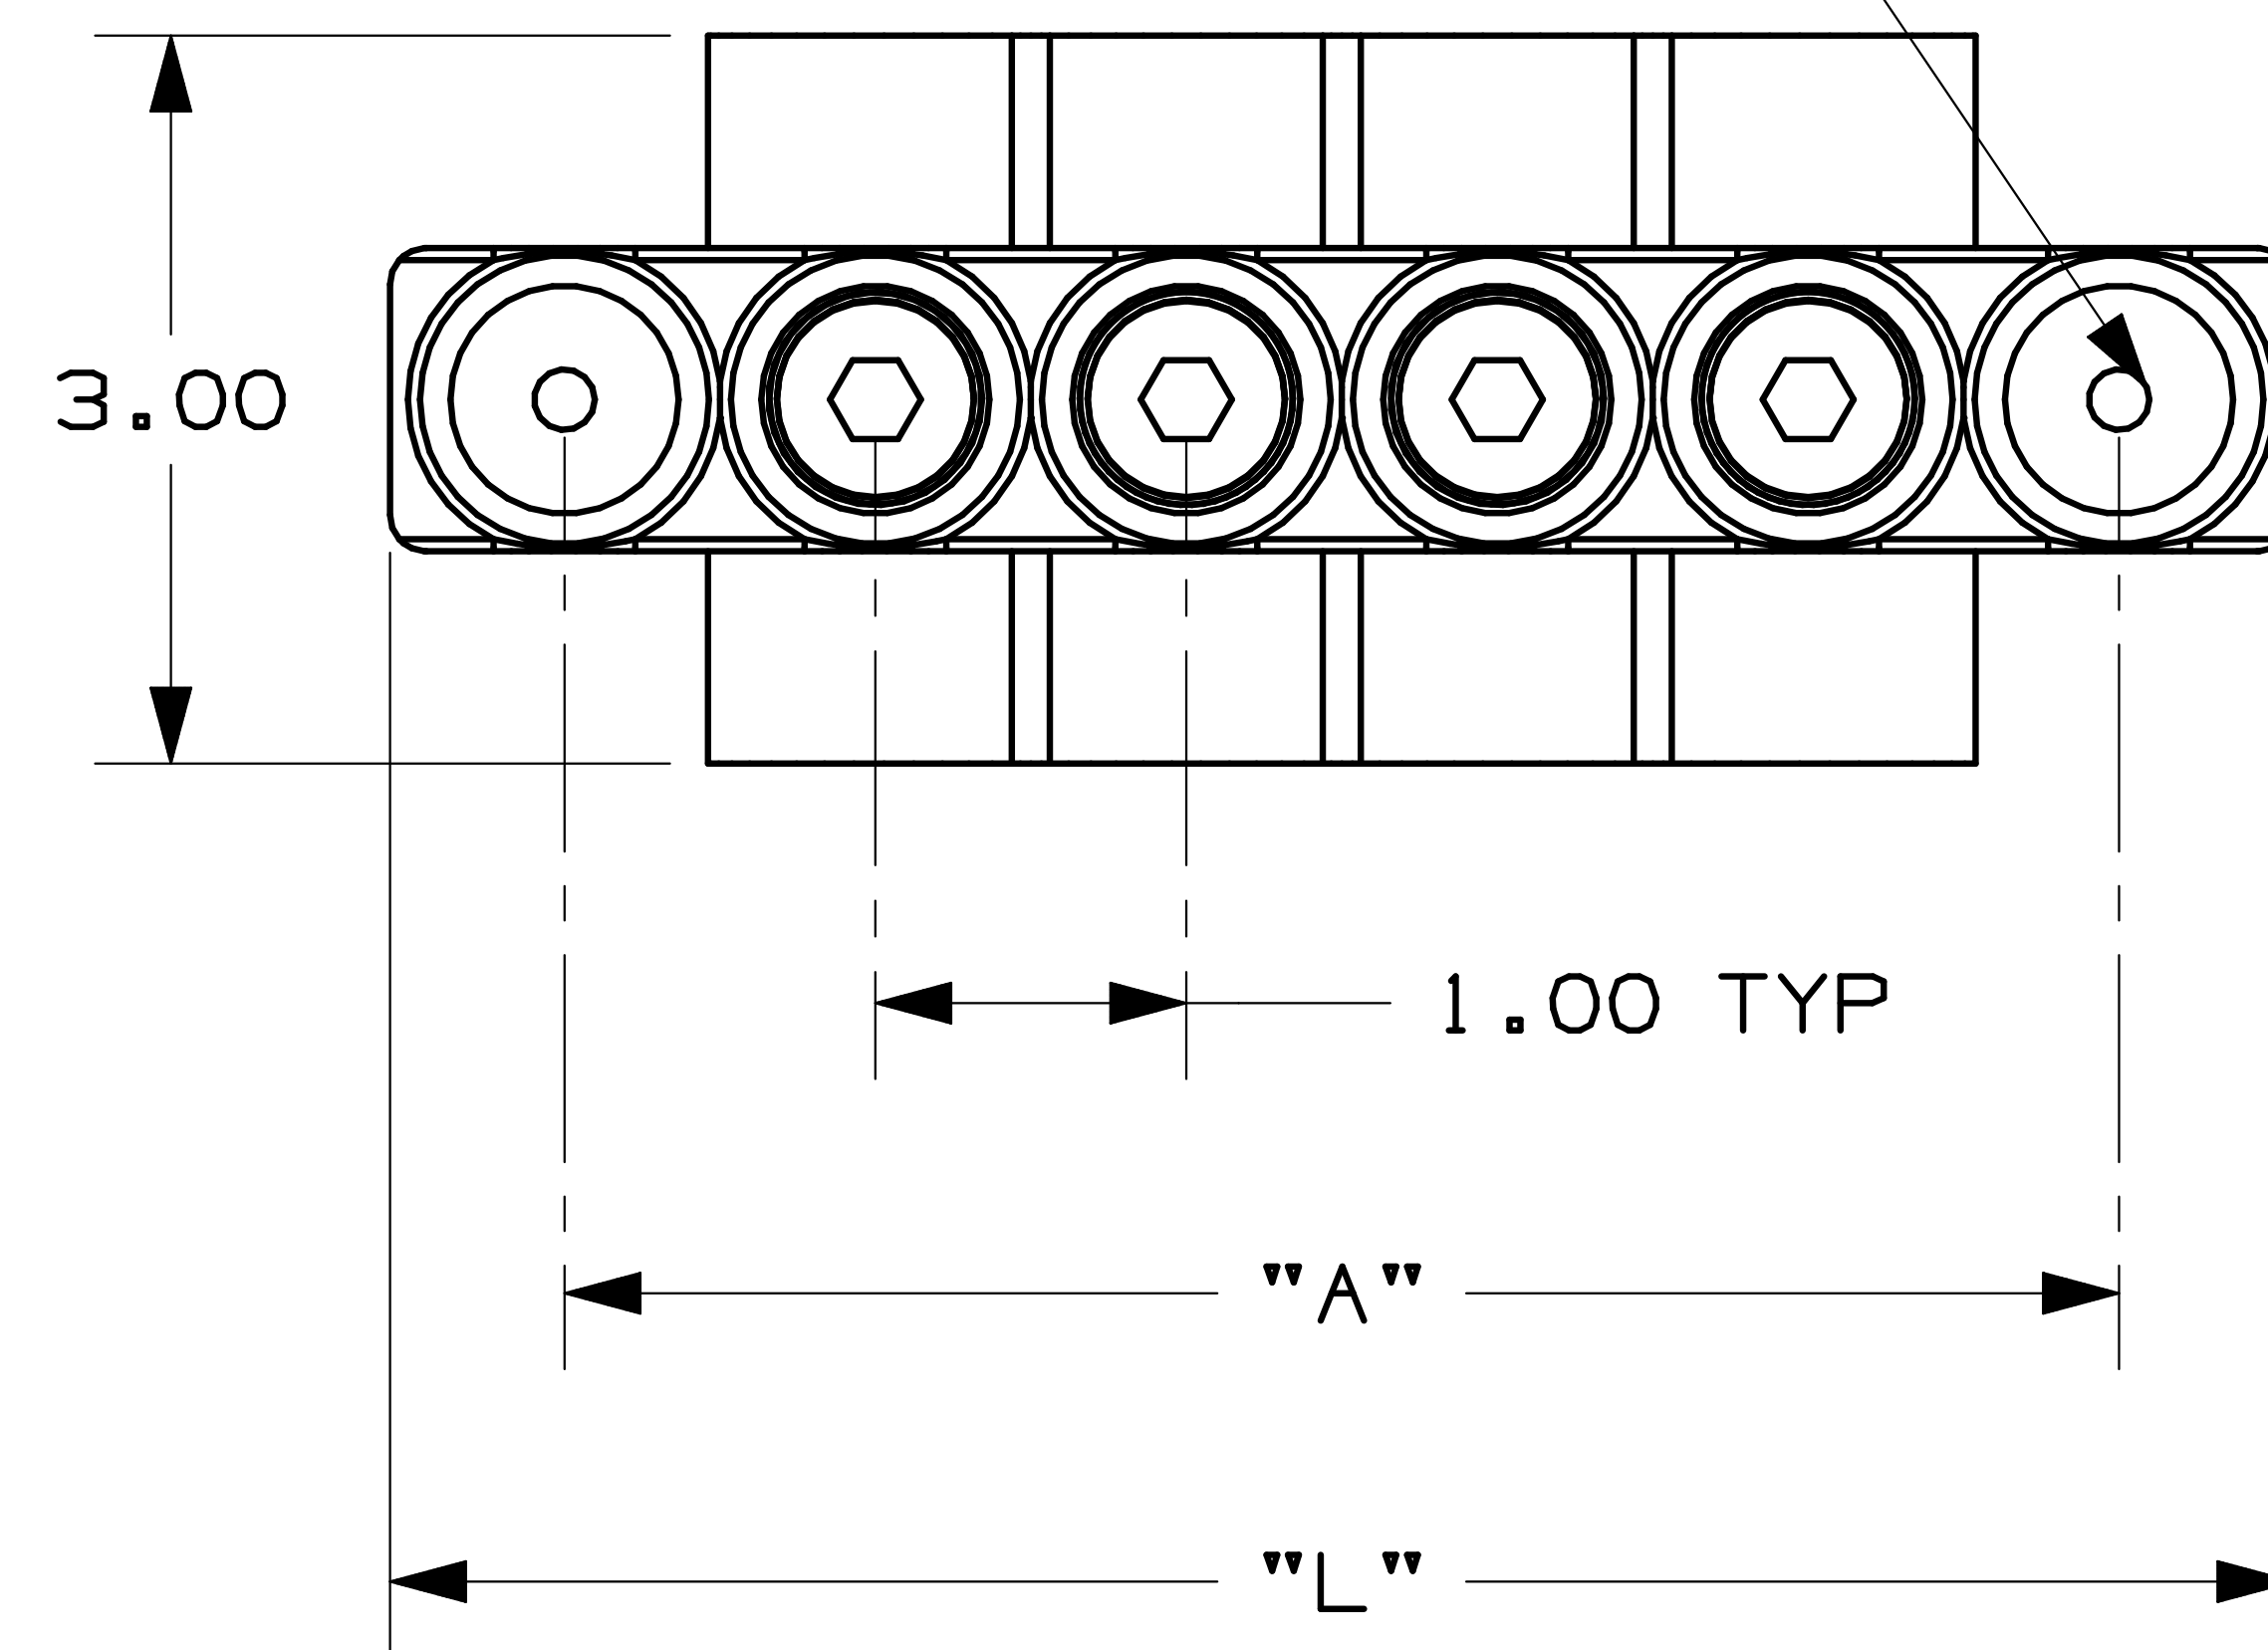

2. WIRE RANGE: 350 kcmil - #10 AWG.
ONLY ONE CONDUCTOR PER PORT ALLOWED.

3. STRIP LENGTH: 1.06 +.06/-0

4. HEX KEY SIZE: 5/16", TIGHTENING TORQUE 275 IN-LB.

5. VOLTAGE RATING: 600 V. MAX.

6. TEMPERATURE RATING: 90° C.

7. CONNECTOR BLOCK BODY IS MADE FROM ALUMINUM. CLAMPING SCREWS ARE TIN PLATED. PORTS IN CONNECTOR BLOCK ARE PREFILLED WITH AN OXIDE-INHIBITING COMPOUND.


8. INSULATION MATERIAL IS CLEAR PVC.

9. CLAMPING SCREW ACCESS PORTS AND ALL CONDUCTOR ENTRY PORTS ARE PROVIDED WITH REMOVABLE PLASTIC CLOSURE PLUGS.


10. ALL DIMENSIONS SHOWN ARE NOMINAL.

11. PACKAGE QTY: -2 = 2 PCS
 -1 = 1 PCS

12. THIS PART IS ROHS COMPLIANT.

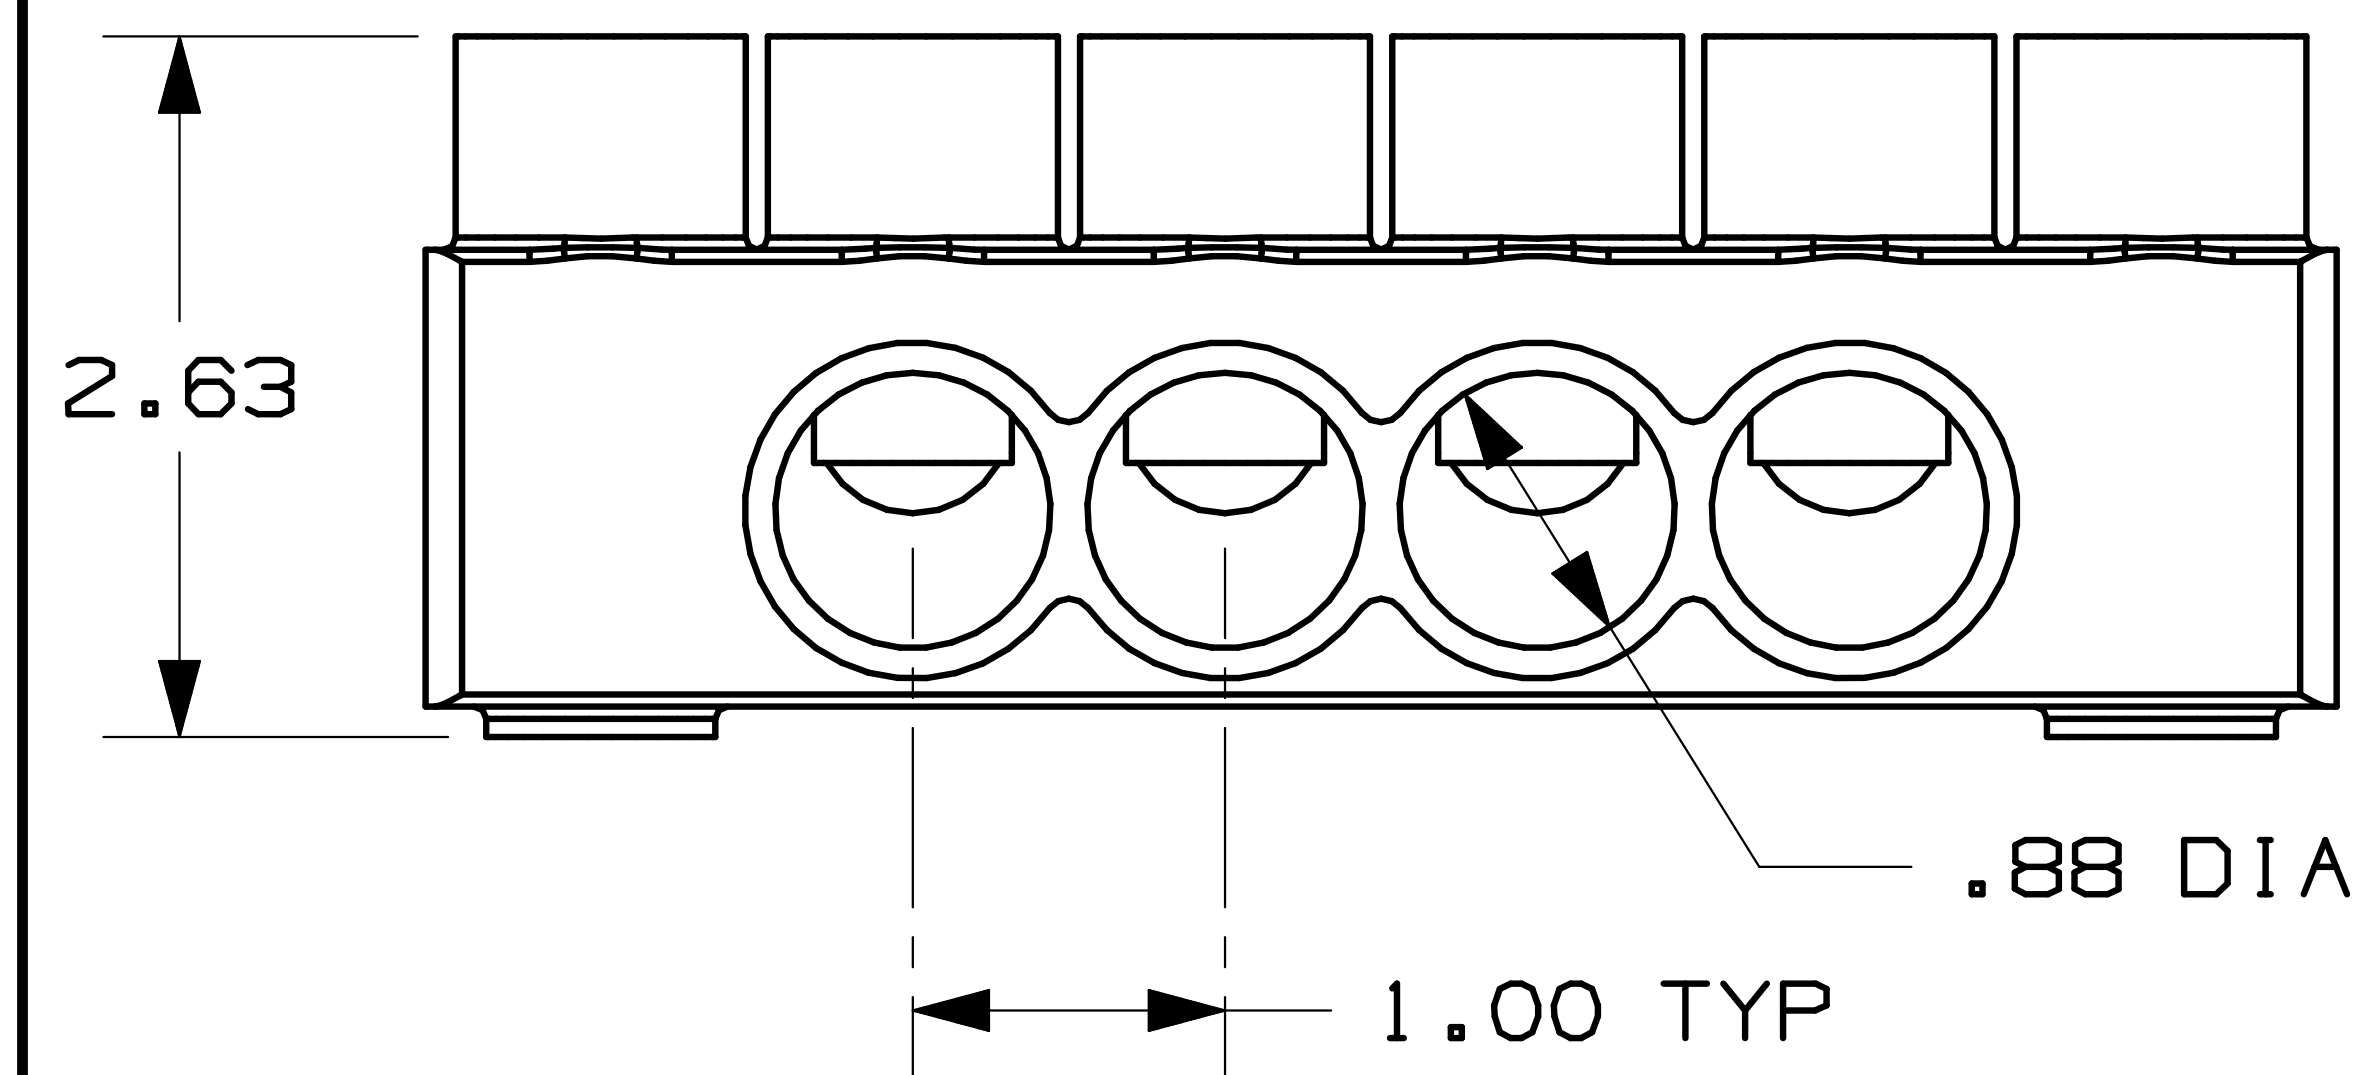

PART NUMBER	# CONDUCTOR PORTS	DIM "L"	DIM "A"
PCSBMT350-4-2Y	4	6.17	5.00
PCSBMT350-6-2Y	6	8.17	7.00
PCSBMT350-8-2Y	8	10.17	9.00
PCSBMT350-10-1Y	10	12.17	11.00
PCSBMT350-12-1Y	12	14.17	13.00

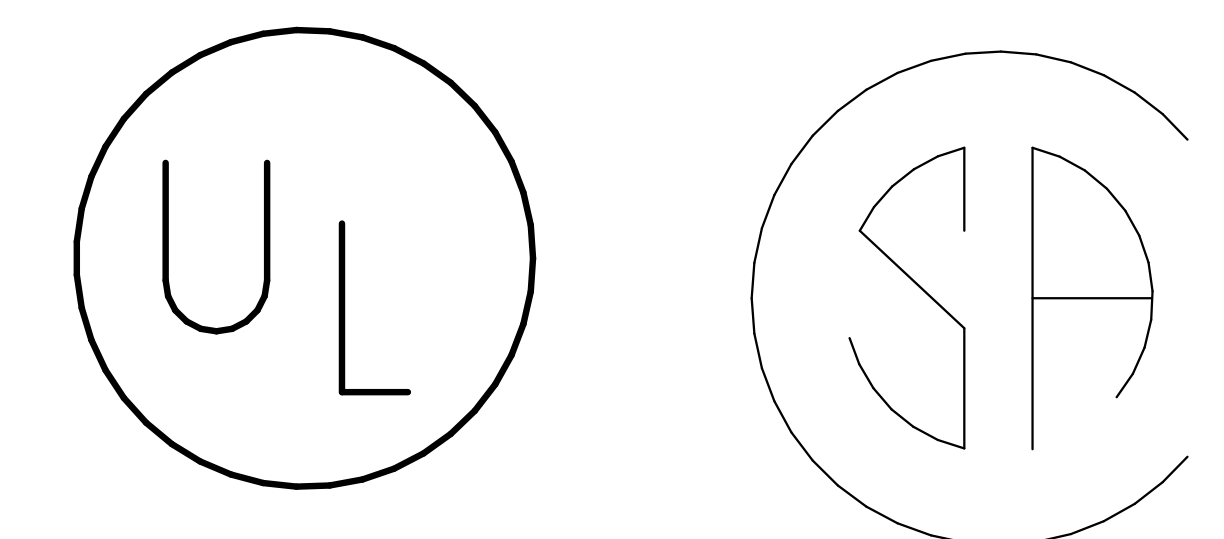

									C41536_00
									
									MULTI-TAP INSULATED CONNECTORS WITH MOUNTING HOLES
00	3/06	JHNU	LEM	DRAWING RELEASED - ROHS COMPLIANT	PC00353				PCSBMT 350 DOUBLE SIDED SERIES
REV	DATE	BY	CHK	DESCRIPTION	ECN #	CUST	PM		DRAWN BY JHNU
									CHK'D SCALE N/A
									DRAWING NO. C41536