

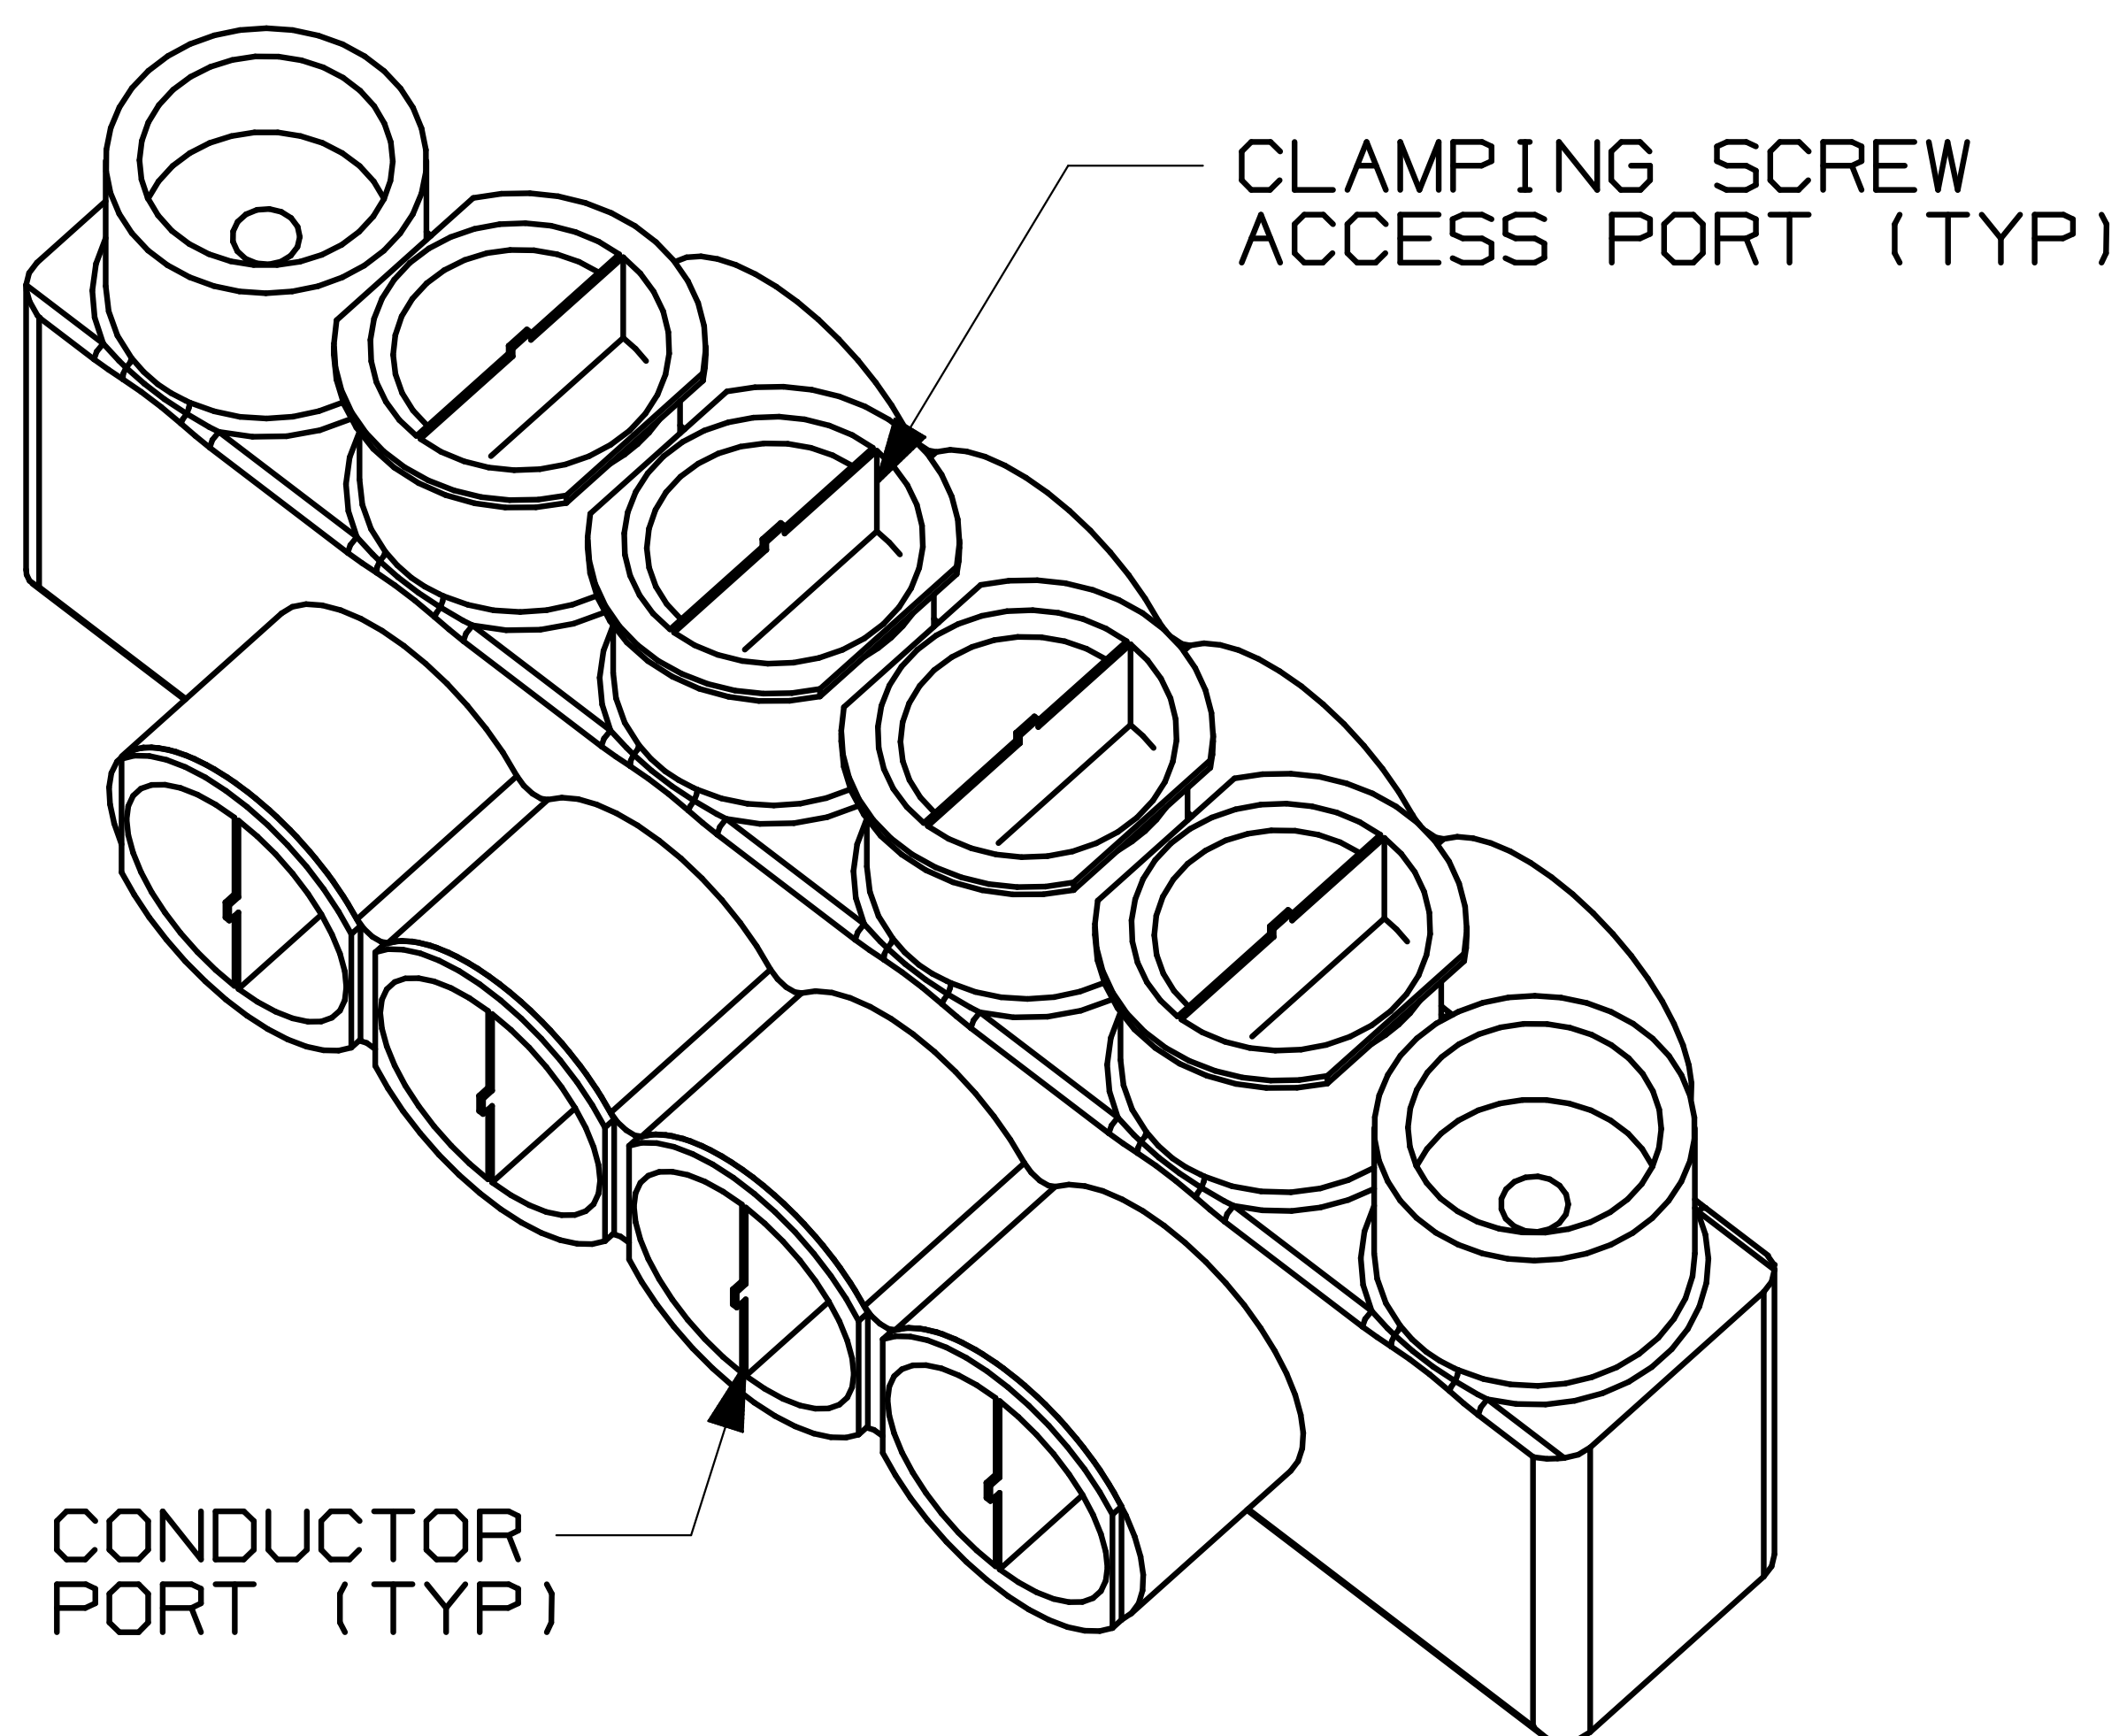


INSULATED MOUNTING HOLE  
(ACCOMODATES 1/4" HARDWARE)  
(2 PLCS)

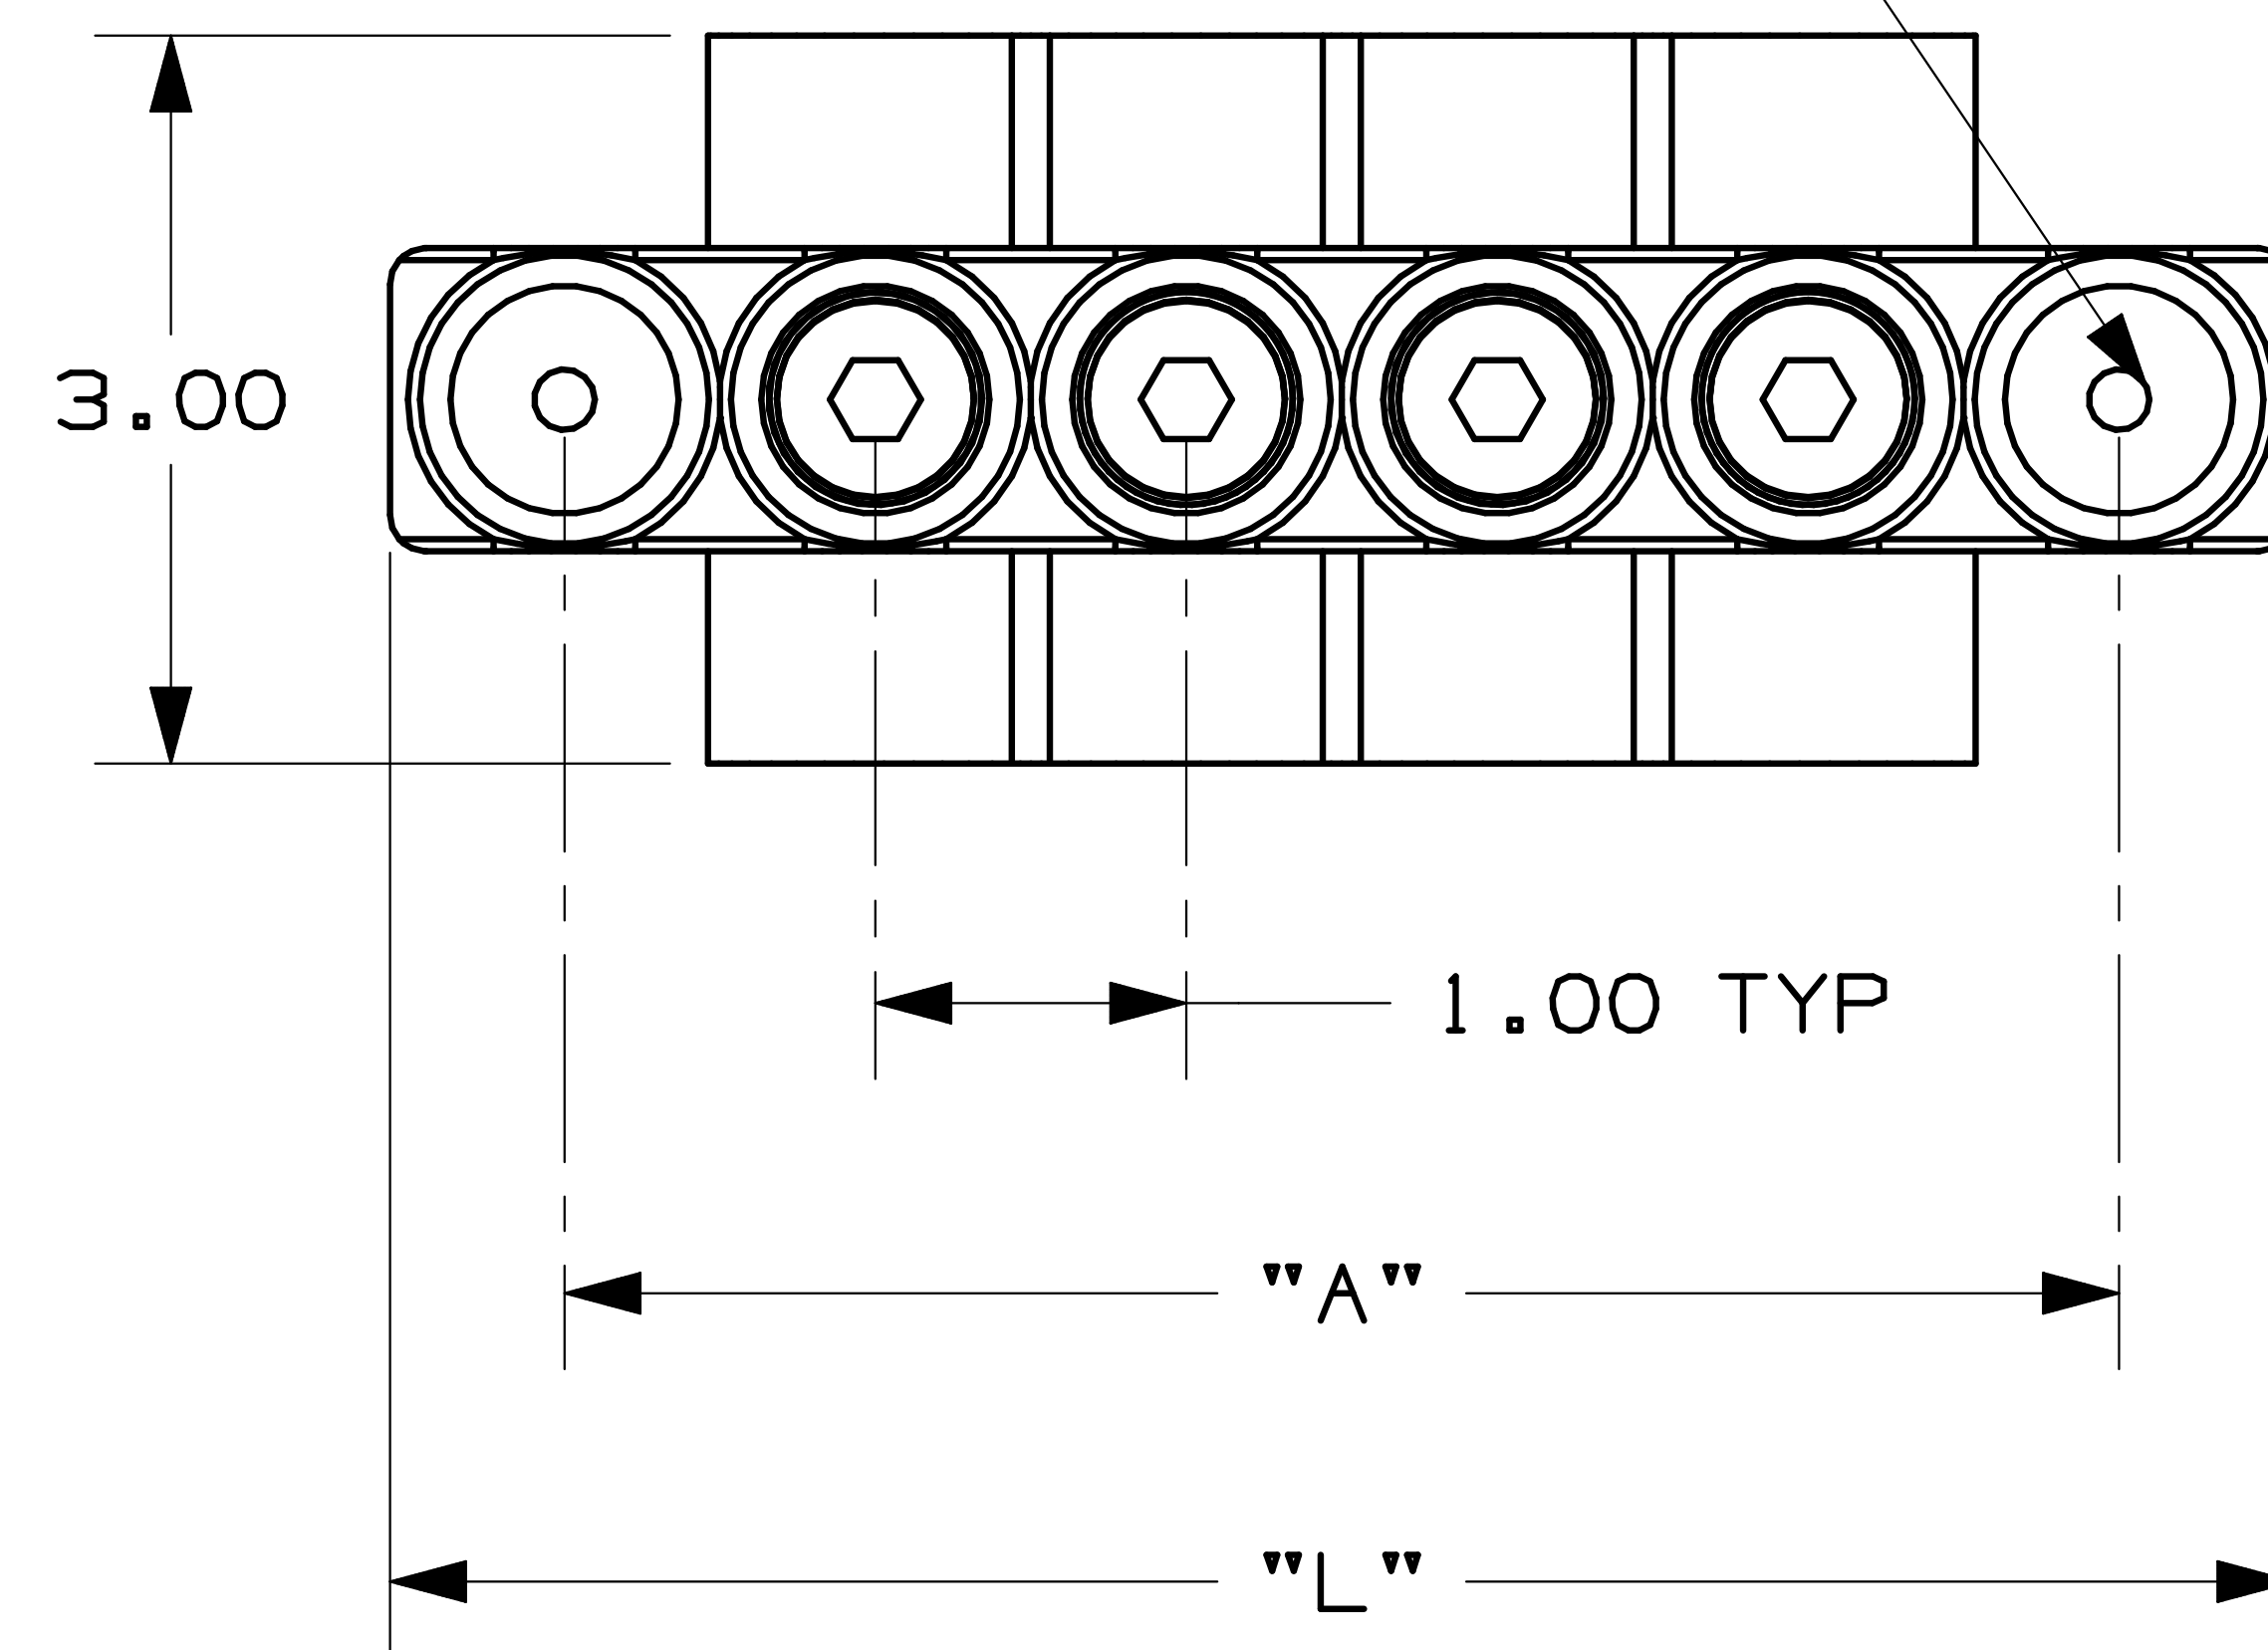


NOTES :

1. UL LISTED AND CSA CERTIFIED. DUAL RATED CU9AL FOR ALUMINUM OR COPPER CONDUCTORS. MEETS OR EXCEEDS ANSI C119.4
2. WIRE RANGE: 350 kcmil - #10 AWG. ONLY ONE CONDUCTOR PER PORT ALLOWED.
3. STRIP LENGTH: 1.06 +.06/-0
4. HEX KEY SIZE: 5/16", TIGHTENING TORQUE 275 IN-LB.
5. VOLTAGE RATING: 600 V. MAX.
6. TEMPERATURE RATING: 90° C.
7. CONNECTOR BLOCK BODY IS MADE FROM ALUMINUM. CLAMPING SCREWS ARE TIN PLATED. PORTS IN CONNECTOR BLOCK ARE PREFILLED WITH AN OXIDE-INHIBITING COMPOUND.
8. INSULATION MATERIAL IS CLEAR PVC.
9. CLAMPING SCREW ACCESS PORTS AND ALL CONDUCTOR ENTRY PORTS ARE PROVIDED WITH REMOVABLE PLASTIC CLOSURE PLUGS.
10. ALL DIMENSIONS SHOWN ARE NOMINAL.
11. PACKAGE QTY:    -2 = 2 PCS  
                      -1 = 1 PCS
12. THIS PART IS ROHS COMPLIANT.

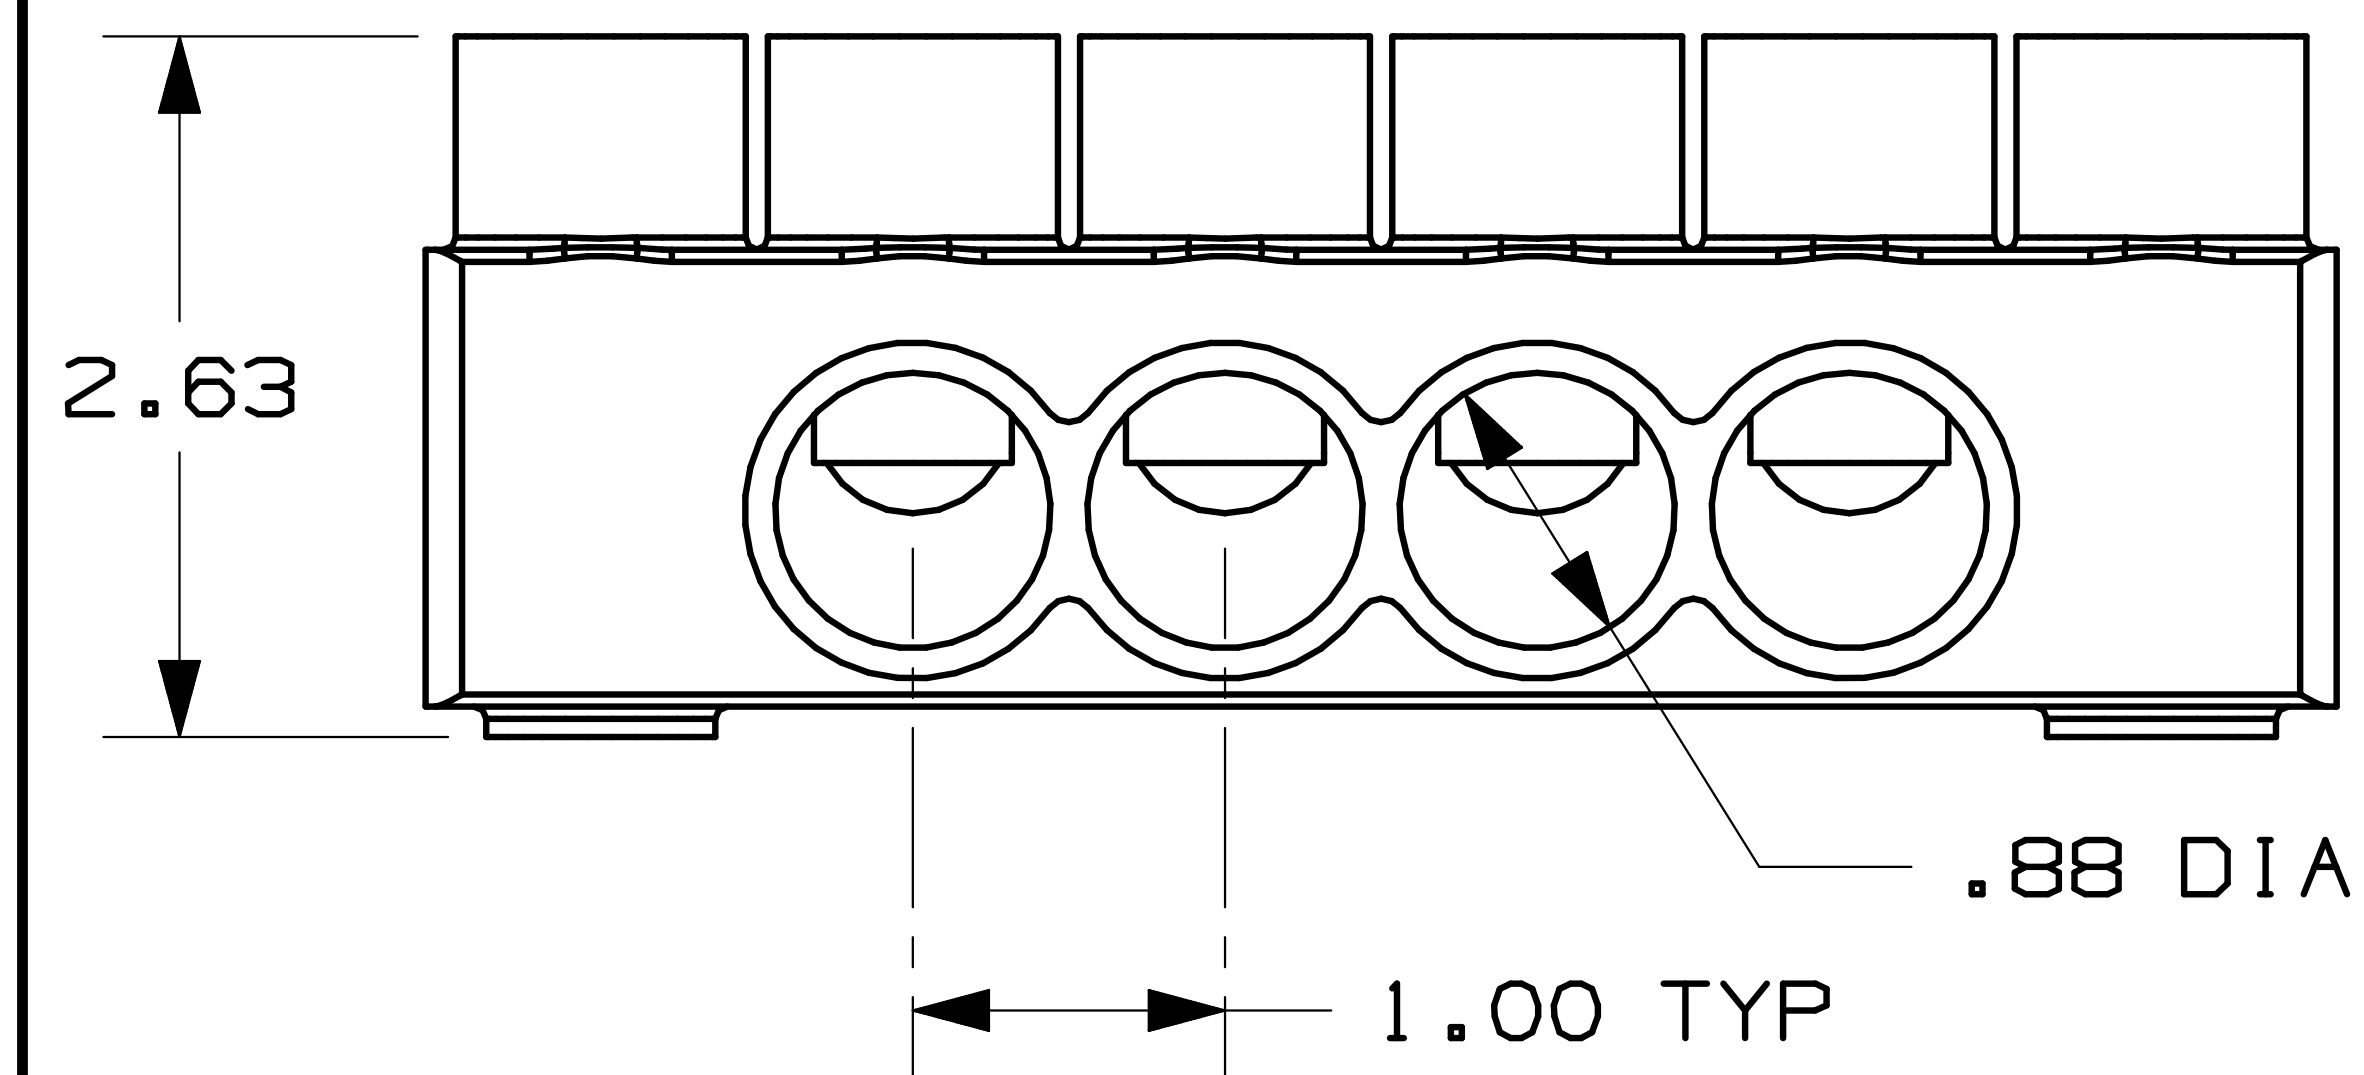

| PART NUMBER     | # CONDUCTOR PORTS | DIM "L" | DIM "A" |
|-----------------|-------------------|---------|---------|
| PCSBMT350-4-2Y  | 4                 | 6.17    | 5.00    |
| PCSBMT350-6-2Y  | 6                 | 8.17    | 7.00    |
| PCSBMT350-8-2Y  | 8                 | 10.17   | 9.00    |
| PCSBMT350-10-1Y | 10                | 12.17   | 11.00   |
| PCSBMT350-12-1Y | 12                | 14.17   | 13.00   |

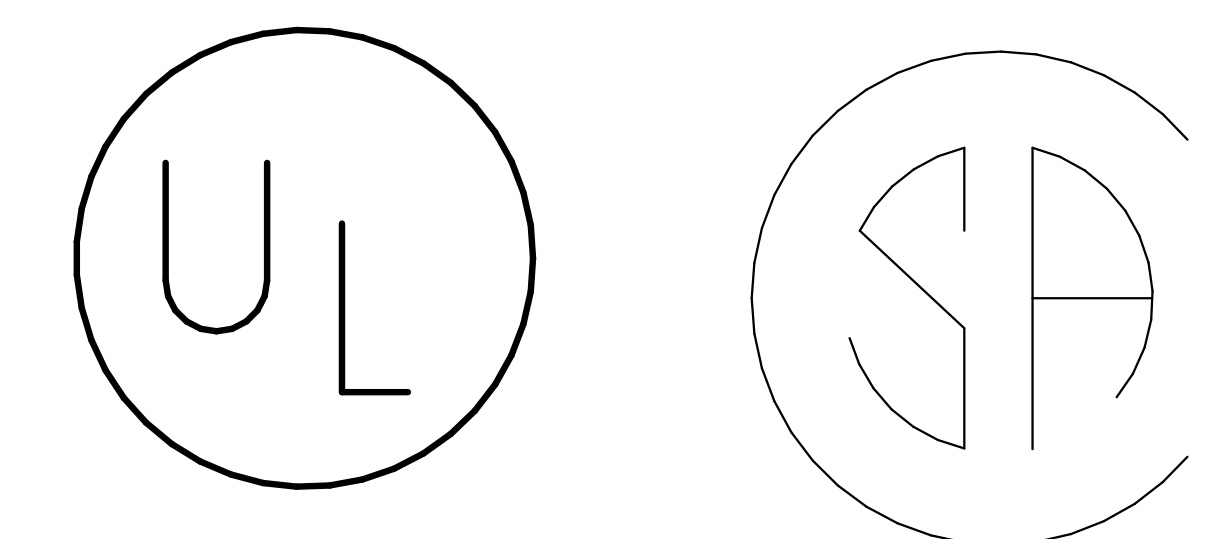

|     |      |      |     |                                   |         |      |    |  | C41536_00                                                                             |
|-----|------|------|-----|-----------------------------------|---------|------|----|--|---------------------------------------------------------------------------------------|
|     |      |      |     |                                   |         |      |    |  |  |
|     |      |      |     |                                   |         |      |    |  |                                                                                       |
|     |      |      |     |                                   |         |      |    |  | MULTI-TAP INSULATED CONNECTORS<br>WITH MOUNTING HOLES                                 |
| 00  | 3/06 | JHNU | LEM | DRAWING RELEASED - ROHS COMPLIANT | PC00353 |      |    |  | PCSBMT 350 DOUBLE SIDED SERIES                                                        |
| REV | DATE | BY   | CHK | DESCRIPTION                       | ECN #   | CUST | PM |  | DRAWN BY JHNU    CHK'D    SCALE N/A    DRAWING NO. C41536                             |