

SCALE 3:2

SCALE 3:2

TABLE 1

ITEM	QTY	DESCRIPTION	MATERIAL	FINISH
1	-	WIRES	PVC	-
2	4/5/8/12	CONTACT M12 MALE	BRASS	SELECTIVE GOLD OVER NICKEL
3	-	POTTING MATERIAL	WEVO	-
4	1	INSERT U12 MALE XP BLACK	ULTRAMID	-
5	1	SHELL M12MA/M16MA BM	BRASS	NICKEL PLATED
6	1	NUT M16x1.5	BRASS	NICKEL PLATED
7	1	GASKET BLACK	EPDM	-

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

2017/05/18 2017/12/21	2017/05/18 2017/12/21	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION UNITS	SCALE	
		ANGULAR TOL ± 1.0 °		mm	2:1	
		4 PLACES ±	FGAIK	DATE	2017/05/18	
		3 PLACES ±	CHK'D BY	DATE		
EC NO: 169750 DRWN: FGAIK CHK'D: RSILLER APPR: RSILLER	2017/05/18 2017/12/21	2 PLACES ± 0.05	APPR BY	DATE		PRODUCT CUSTOMER DRAWING
		1 PLACE ± 0.3	RSILLER	2017/12/21		
		0 PLACES ± 0.5	DRAWING SIZE	THIRD ANGLE PROJECTION		
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		A3		
SERIES		MATERIAL NUMBER		CUSTOMER		120084 SEE SHEET 2 GENERAL MARKET
DOCUMENT NUMBER		DOC TYPE	DOC PART	SHEET NUMBER		
1200845183		PSD	000	1 OF 2		

TABLE 2						
MOLEX PN:	1200845183	1200845185	1200845187	1200845188	1200848138	1201090035
ENGINEERING NO.:	WR4W46E03C3003	WR5W46E03C3003	WR8W46E02C300	WRCW46E01C300	WR8W46E02M010	
POLES:	4 POLES	5 POLES	8 POLES	12 POLES	8 POLES	4 POLES
VOLTAGE RATING:	250V	60V	30V	30V	30V	250V
CODING	A - Code	A - Code	A - Code	A - Code	A - Code	D - Code
AMPERE RATING:	4A	4A	2A	1.5A	2A	4A
PROTECTION CLASS:	CONNECTOR INTERFACE: IP 67/69K (IN MATED CONDITION) SHELL TO ENCLOSURE: IP 67/69K (WHEN PROPERLY INSTALLED)					
OPERATING TEMPERATURE:	-25°C / +85°C					
UL CERTIFICATION:	FILE NO. E152210					
CSA CERTIFICATION:	FILE NO. LR6837					
WIRES:	22 AWG PVC	4x22 AWG PVC + 1x20 AWG PVC	24 AWG PVC	26 AWG PVC	24 AWG PVC	22 AWG PVC
WIRES' COLORS:	ACCORDING TO IEC 60947-5-2			ACCORDING TO DIN 47100		ACCORDING TO TABLE 3
L +Tol. [mm]:	300±10	300±10	300±10	300±10	1000±20	300±10
LAYOUT:						

DIN 47100	
PIN	COLOR
1	WHITE/Weiß
2	BROWN/braun
3	GREEN/Grün
4	YELLOW/Gelb
5	GREY/grau
6	PINK/Rosa
7	BLUE/blau
8	RED/rot
9	BLACK/schwarz
10	PURPLE/lila
11	GREY-PINK/grau-rosa
12	RED-BLUE/rot-Blau

IEC 60947-5-2	
PIN	COLOR
1	BROWN/braun
2	WHITE/Weiß
3	BLUE/blau
4	BLACK/schwarz
5	GRAY/grau

PIN	COLOR
1	YELLOW/Gelb
2	WHITE/Weiß
3	ORANGE/Orange
4	BLUE/blau

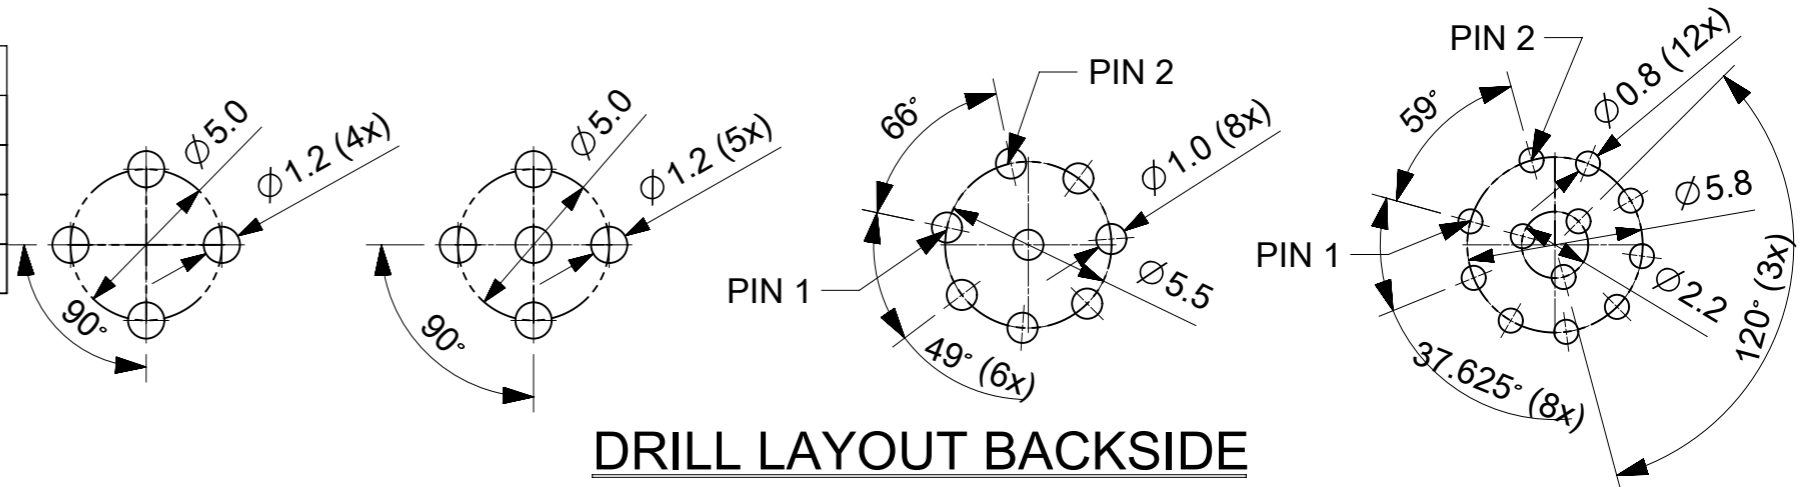


TABLE 6				
MOLEX P/N	ENGINEERING NR.	L [mm]	TOL	DESCRIPTION
1200845183	WR4W46E03C3003	300	±10	REC U12 4P AC MA 0.3M M16 BM WIR BRA AU
1200845185	WR5W46E03C3003	300	±10	REC U12 5P AC MA 0.3M M16 BM WIR BRA AU
1200845187	WR8W46E02C3003	300	±10	REC U12 8P AC MA 0.3M M16 BM WIR BRA AU
1200845188	WRCW46E01C3003	300	±10	REC U12 12P AC MA 0.3M M16 BM WIR BRA AU
1200848138	WR8W46E02M0103	1000	±20	REC U12 8P AC MA 1.0M M16 BM WIR BRA AU
1201090035	-	300	±10	REC U12 4P DC MA 0.3M M16 BM WIR BRA AU

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

2017/05/18 2017/12/21	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION UNITS	SCALE			
		mm	2:1			
4 PLACES ±	DRWN BY	DATE	REC U12 XP XC MA STR XM M16 BM WIR			
	FGAIK	2017/05/18				
3 PLACES ±	CHK'D BY	DATE	PRODUCT CUSTOMER DRAWING			
2 PLACES ± 0.05	APPR BY	DATE	SERIES			
	RSILLER	2017/12/21		120084		
1 PLACE ± 0.3	DRAWING SIZE	THIRD ANGLE PROJECTION	MATERIAL NUMBER			
	A3			SEE TABLE 2		
0 PLACES ± 0.5	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		CUSTOMER			
				GENERAL MARKET		
EC NO: 169750 DRWN: FGAIK CHK'D: REV APPR: RSILLER			DOCUMENT NUMBER	DOC TYPE	DOC PART	SHEET NUMBER
A			1200845183	PSD	000	2 OF 2