


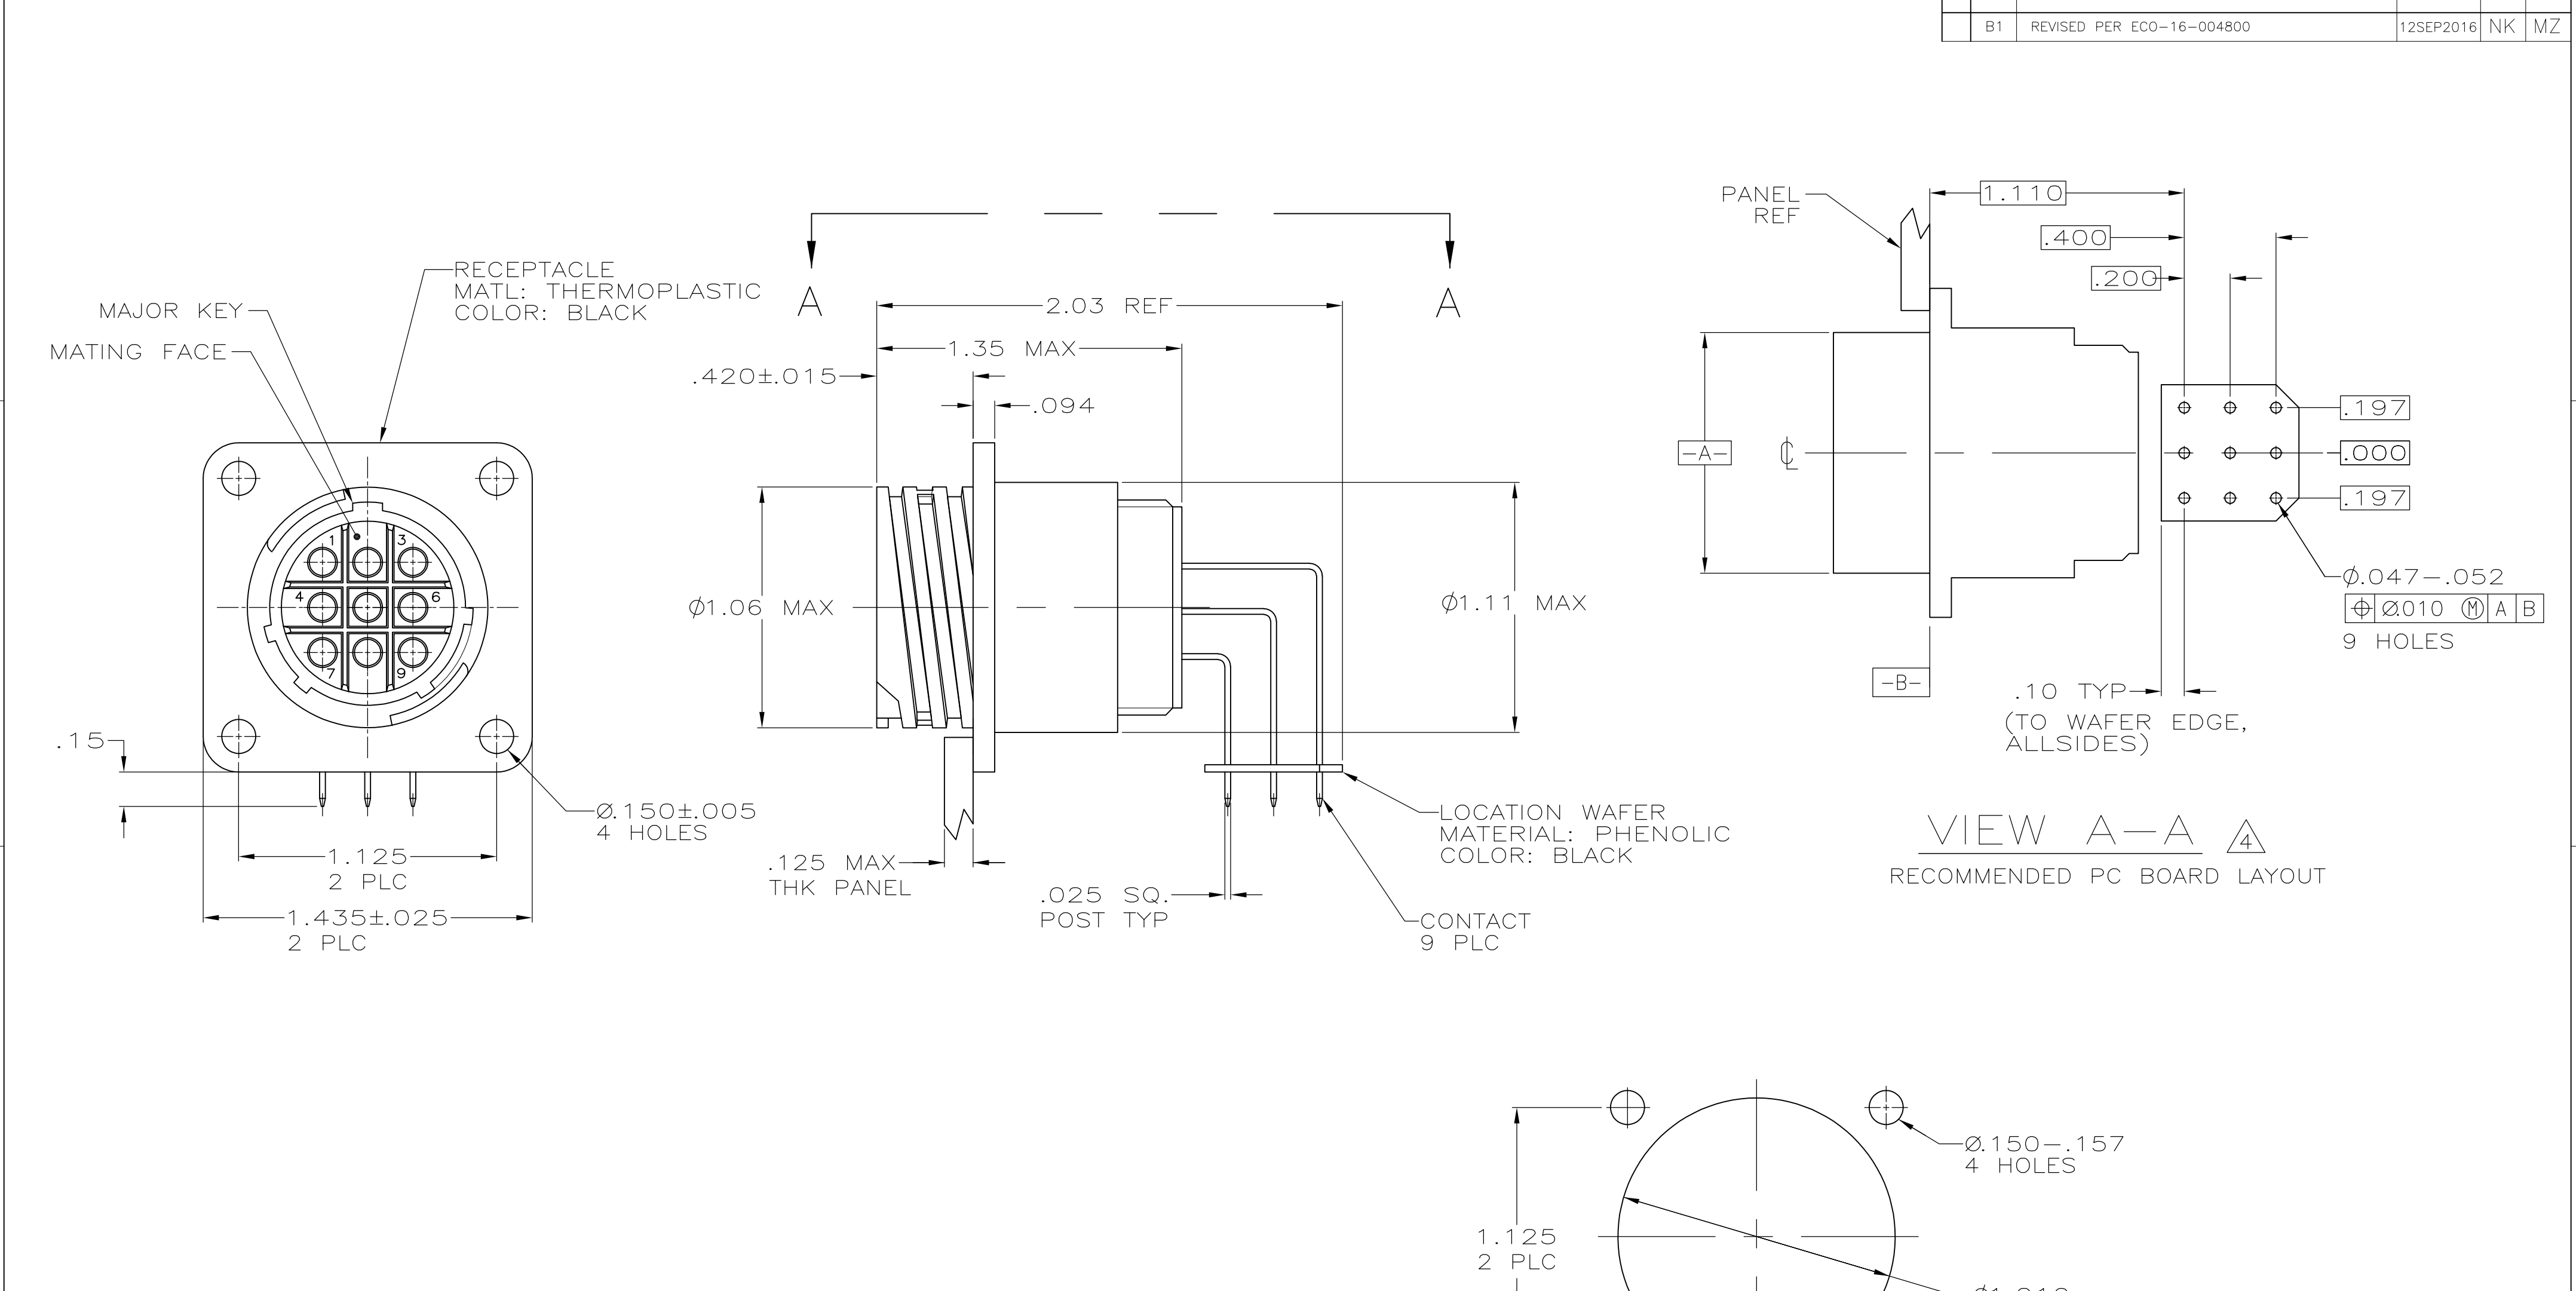

- 1
- CONTACT CAVITIES IDENTIFIED BY CHARACTERS ON FRONT AND REAR FACES OF CONNECTOR.
- 2
- #6 FASTENER RECOMMENDED FOR MOUNTING.
- 3
- CONTACT BODY: .000030 MIN GOLD FOR A LENGTH OF .250 MIN FROM MATING END, WITH REMAINDER TO BE GOLD FLASH, BOTH OVER .000050 MIN NICKEL.
CONTACT POST: .000100 MIN TIN-LEAD OVER .000100 MIN COPPER.
- 4
- PC BOARD HOLE PATTERN IS DEFINED RELATIVE TO CONNECTOR C.L. AND PANEL MOUNTING FACE INDICATED.
- 5
- CONTACT BODY: .000030 MIN GOLD FOR A LENGTH OF .250 MIN FROM MATING END, WITH REMAINDER TO BE GOLD FLASH, BOTH OVER .000050 MIN NICKEL.
CONTACT POST: .000100 MIN TIN OVER .000100 MIN COPPER.

RECOMMENDED
PANEL CUTOUT

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN HAMNER 4-13-00	TE TE Connectivity			
DIMENSIONS: INCHES		CHK M.CHACKO 4-18-00				
		APVD M.CHACKO 4-18-00	NAME			
		PRODUCT SPEC	RECEPTACLE ASSY, POSTED, RT ANGLE, STD SEX, SIZE 17-9, SERIES 1, CPC			
MATERIAL		FINISH	SIZE A2	CAGE CODE 00779	DRAWING NO C=796497	RESTRICTED TO
			SCALE 2:1		SHEET 1 of 1	REV B1
		CUSTOMER DRAWING				