

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

20






© COPYRIGHT 20

BY -

ALL RIGHTS RESERVED.


REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL RELEASE	23JUN2015	DL	CW

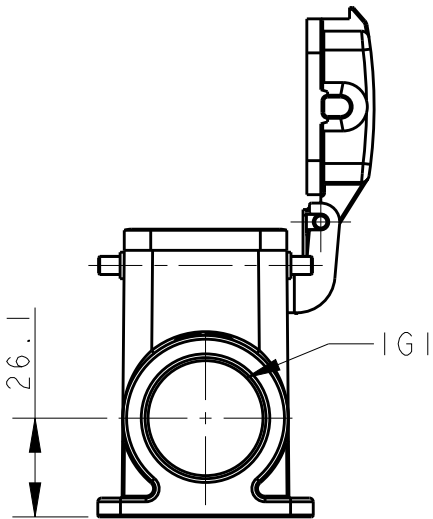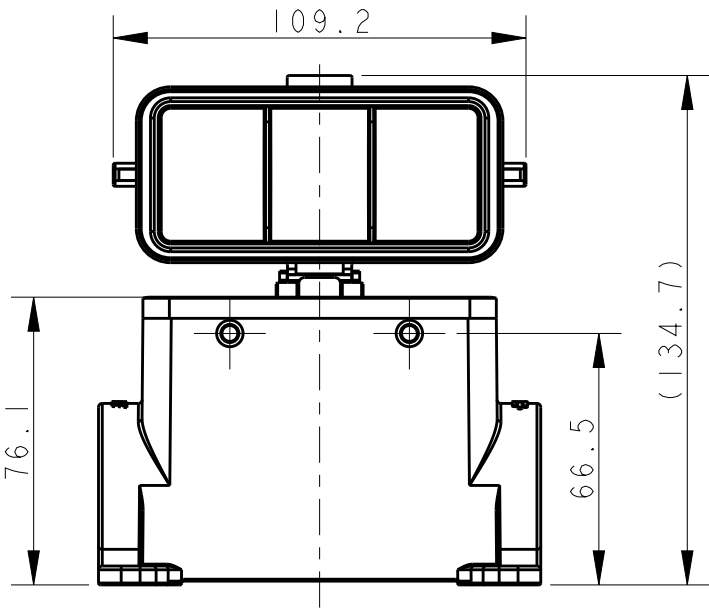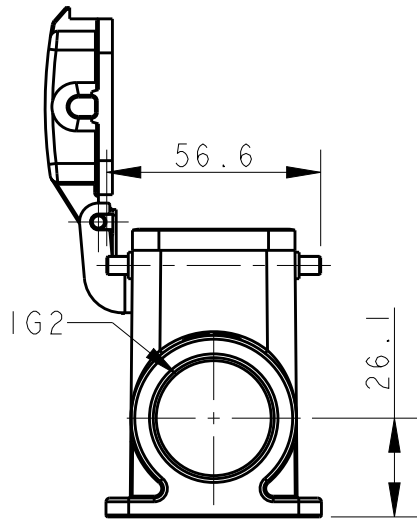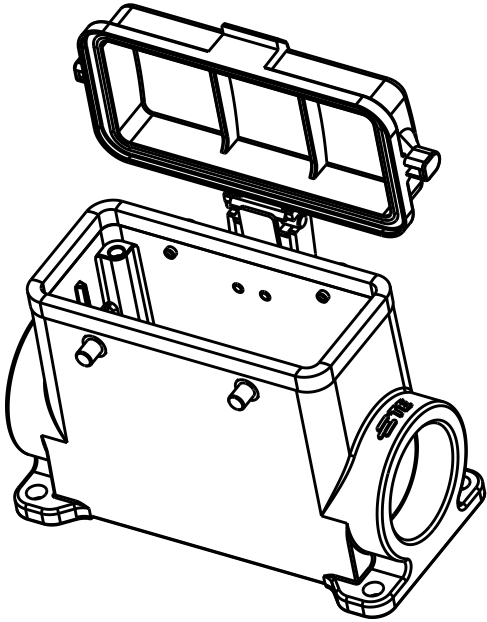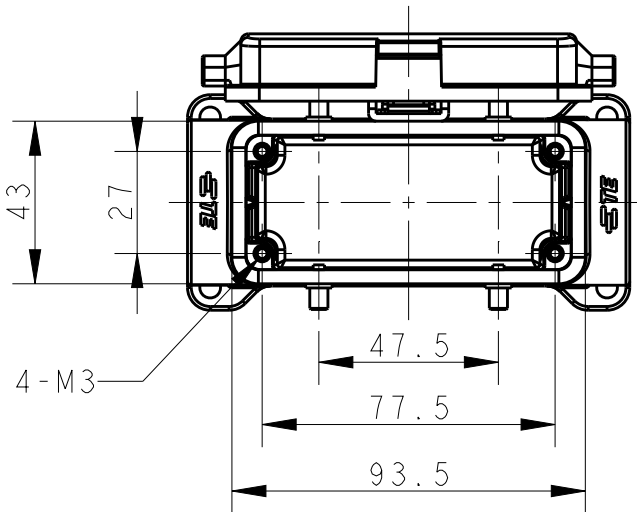

NOTES:
1. TECHNICAL CHARACTERISTICS:
BODY MATERIAL: DIE CAST ALUMINIUM ALLOY
SURFACE TREATMENT: POWDER-COATED, GRAY
OPERATION TEMPERATURE: -40-+125°C
DEGREE OF PROTECTION: IP65 (MATED)

注释:
1. 技术参数:
主体材料: 铝合金
表面处理: 粉末喷涂, 灰色
工作温度: -40-+125°C
防护等级: IP65(配合)

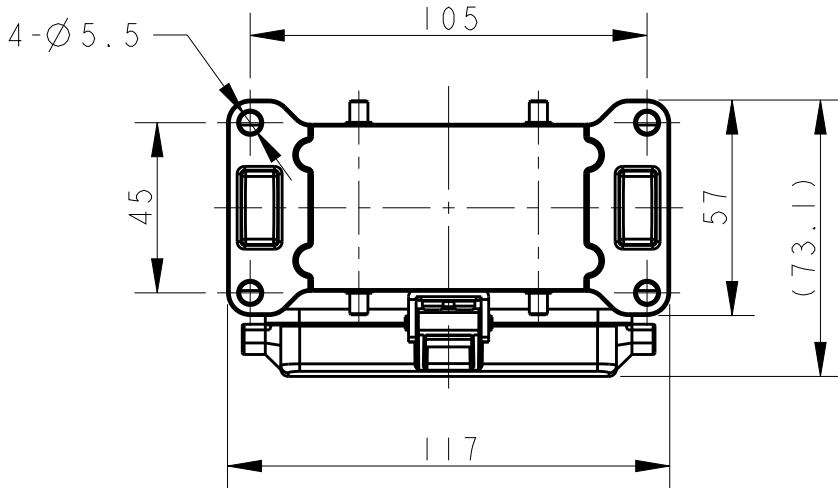

TI490160121-000	TYPE I	HI6B-SDRH-BO-PG2I	PG2I	-
TI490160129-000		HI6B-SDRH-BO-PG29	PG29	-
TI490160132-000		HI6B-SDRH-BO-M32	M32	-
TI490160221-000		HI6B-SDRH-BO-2PG2I	PG2I	PG2I
TI490160229-000		HI6B-SDRH-BO-2PG29	PG29	PG29
TI490160232-000		HI6B-SDRH-BO-2M32	M32	M32
ASSEMBLY PART NUMBER	TYPE	ASSEMBLY PART DESCRIPTION	IG1	IG2

TYPE I: HIGH BODY + PLASTIC PROTECTION COVER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN DAVID LI 23JUN2015	 TE Connectivity	
DIMENSIONS: mm		CHK CHRIS WANG 23JUN2015		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD XU XIANG 23JUN2015		
PRODUCT SPEC 108-137013		NAME HI6B-SDRH-BO-PG/M		
APPLICATION SPEC 114-137013		SIZE A3	CAGE CODE -	DRAWING NO C-TI49016XXXX000
MATERIAL TBD		WEIGHT -	RESTRICTED TO -	
FINISH -		CUSTOMER DRAWING		SCALE 1:2 SHEET 1 OF 2 REV A

