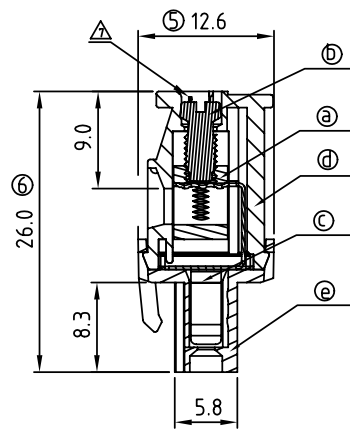
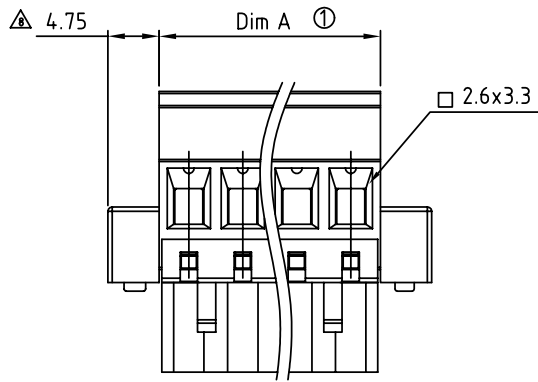

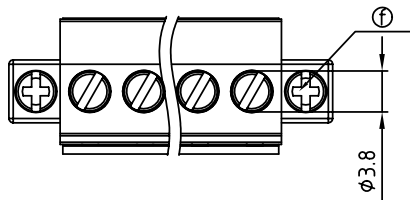


N = Number of poles
 Dim A=Nx5.0+0.50
 Dim B=(N-1)x5.0

	Dim A	Dim B
2-6p	±0.15	±0.15
7-12p	±0.25	±0.25
13-18p	±0.30	±0.30
19-24p	±0.40	±0.40

SIGN	DATE	DESCRIPTION	APPROVER
△	11.01'05	Standard spec is changed.	Marivn
△	8/07'06	Added VDE and TUV standard	梁仁松
△	12/02'08	With flange screw changed from "-" slot type to "+/-" slot type	Jacke
△	12/02'08	The temperature changed from -30°C +105°C to -40°C +115°C	Jacke
△	12/02'08	Add the tolerance table	Jacke
△	2010.03.13	Add the 2p mark	Jacke
△	2010.05.28	The design is changed	Chen Bo
△	2010.08.16	The design is changed	Chen Bo

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

Material

- Item a Clamp: Brass(CuZn) Ni plated
- Item b Terminal screw: Steel Zinc plating "-" slot type
- Item c Female contact: PhBz Tin plated
- Item d Terminal (up body): Thermoplastic (UL94V-0)
- Item e Terminal (down body): Thermoplastic (UL94V-0)
- △ Item f With flange screw: Steel Zinc plating "+/-" slot type M2.5
- △ △ Electrical cULus/VDE/TUV
 - Voltage rating: 300VAC/300VAC/300VAC
 - Current rating: 15A/17A/15A
 - Wire range: 2.5mm² /0.34-2.5mm²
 - Solid wire(AWG): 12-24
 - Stranded wire(AWG): 12-24
 - Torque: 3.5Lb-In./0.5Nm/0.4Nm
 - Screw: M3
 - Wire strip length: 6-7mm
 - Withstanding Voltage: 1.6KV/2.5KV/2.5KV
 - △ Operating temperature: -40°C to +115°C
 - Safety approval: cULus VDE TUV

TS xx 71 x C xxxx G

- 02 2 CONTACTS
 03 3 CONTACTS
 ...
 24 24 CONTACTS
- Color
 0 Black (RAL9005)
 2 Red (RAL3001/D)
 3 Orange(RAL2011/P)
 4 Yellow(RAL1018/A)
 5 Green(RAL6018/T)
 6 Blue (RAL5015/A)
 8 Grey(RAL7035/D)
- RoHS
 Pb<40,000ppm
 0000: "@" Logo
 000A: "ANYTEK" Mark
 0091: "ANYTEK" Mark
 Any special item by customer request.
 please contact sales department.

ANYTEK				CUSTOMER COPY			
				ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD			
TITLE	TS-5.0mm Series(W/latching hooks on the wire entry side) with flange						
PART NO.	TSxx71xCxxxxG			DWG NO.	8TS0003		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.			Tolerance
			Chen Bo 2010.08.16		UNIT: mm	X. ±0.50	
					SCALE: NONE	X.X ±0.30	
				SHEET: 01/01	REV.: I	X.XX ±0.10	
						X° ±1°	