

CUSTOMER P/N	FCI P/N	L (MM)
RPM 119 1225/1 P1A	10115391-P0004YYLF	40MM

A

B

C


D

A

B

C

D

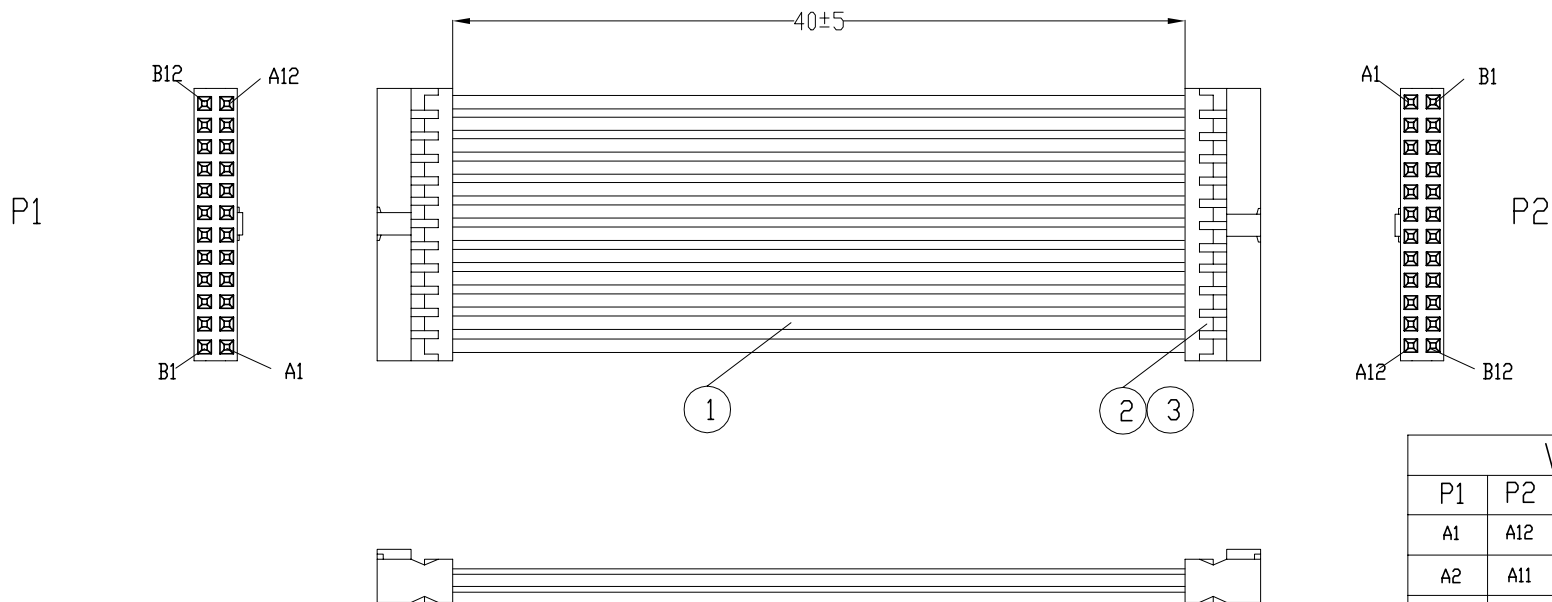

NOTES:


1.100% CONTINUITY TEST FOR OPEN, SHORT, ETC..

2.HI-POT TEST: DC 300V/10ms

CONNECTION RESISTANCE: 3 Ωhm MAX.

INSULATION RESISTANCE: 10M Ωhm MIN.

3. PART NUMBER SCHEME FOR CABLE ASSEMBLY:

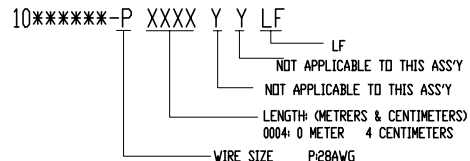

4.ROHS COMPLIANCE

WIRING			
P1	P2	P1	P2
A1	A12	B1	B12
A2	A11	B2	B11
A3	A10	B3	B10
⋮	⋮	⋮	⋮
A10	A3	B10	B3
A11	A2	B11	B2
A12	A1	B12	B1

③	Terminal				48	PC
②	MINITEK CONNECTOR HOUSING 12X2				2	PC
①	UL1007 wire 28#(7/0.12) tinned copper black				AR	M
No.	DESCRIPTION				QTY	UNIT
www.fciconnect.com			surface - 		tolerance std - -	 mm 
			TOLERANCES UNLESS OTHERWISE SPECIFIED			
Dr	Jack Yang	3/18/2010	ANGULAR	0.X ±-	size A3	Scale 2:3
Eng	Jack Yang	3/18/2010		LINEAR		
Chr	Jack Yang	3/18/2010	0* ±*		0.XXX ±-	ECN
Appr	Jackson Wang	3/18/2010	Product family			Spec ref -
	title Minitek FLAT Cable Ass'y			dwg no 10115391	Rev A	
	catalog no -			CUSTOMER		sheet 1 of 1