


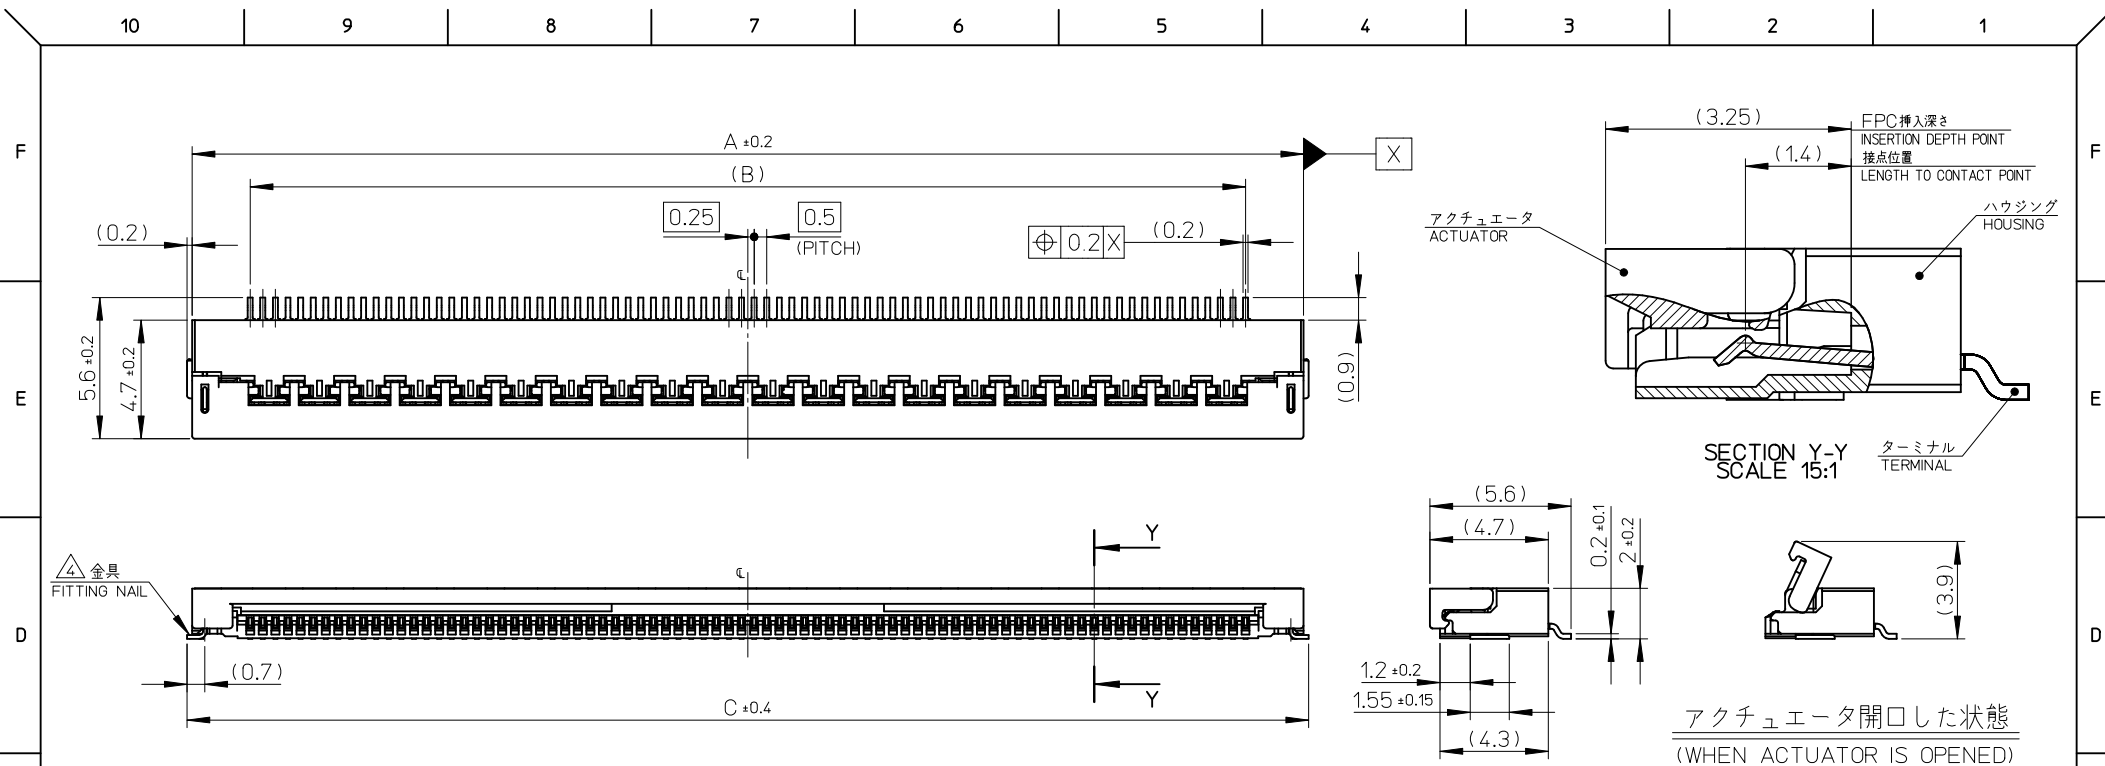

注記 NOTES

1. 使用材料 MATERIAL

ハウジング HOUSING	: 液晶ポリマー ガラス充填, UL94-V0(黒) LIQUID CRYSTAL POLYMER GLASS FILLED, UL94V-0(BLACK)
アクチュエータ ACTUATOR	: PPS ガラス充填, UL94-V0(黒) PPS GLASS FILLED, UL94V-0(BLACK)
ターミナル TERMINAL	: リン青銅(t=0.203) PHOSPHOR BRONZE
金具 FITTING NAIL	: リン青銅(t=0.152) PHOSPHOR BRONZE

2. めっき仕様 PLATING

ターミナル TERMINAL	ニッケル下地金めっき GOLD(Au) OVER NICKEL(Ni) PLATING.
金具 FITTING NAIL	鍍めっき TIN(Sn) PLATING.


3. エンボステープ梱包時は、アクチュエータが閉じた状態とする。 IN THE PACKAGE, ACTUATOR OF PART 503366-**11 SHOULD BE CLOSED.

△ パターン剥離止め用金具
FITTING NAIL FOR PREVENTION OF
PEELING OF P.C.B. PATTERN.

- △ R0.3は、FPC 導体部にかからないこと。
R0.3 MUST NOT BE OVERLAPPED
TO PATTERN OF FPC.
6. N: 極数 N: CIRCUIT.
7. ELV及びRoHS適合品
ELV AND RoHS COMPLIANT

44.5	39.5	44.1	503366-8011	80
34.5	29.5	34.1	503366-6011	60
C	B	A	EMBOSSED TAPE ORDER No. オーダー番号	CIRCUIT
CONNECTOR SERIES No. : 503366-**19				

REVISED		DESCRIPTION		GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 5:1		DESIGN UNITS METRIC		THIRD ANGLE PROJECTION	
EC NO: J2010-2127	DRWN: YKOBAYASHI 02 2010/04/22	CHKD: NMATSUURA 2010/04/23	APPR: KMORIKAWA 2010/04/25	10 UNDER	± ---	DRAWN BY	DATE	5:1					
				10 OVER 30 UNDER	± ---	YKOBAYASHI 02	2010/01/05						
				30 OVER	± ---	CHECKED BY	DATE						
				ANGULAR	±1 °	NMATSUURA	2010/01/05						
				DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		APPROVED BY	DATE						
						KMORIKAWA	2010/01/05						
						MATERIAL NO.							
						SEE CHART							
						SIZE A3							
						THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							

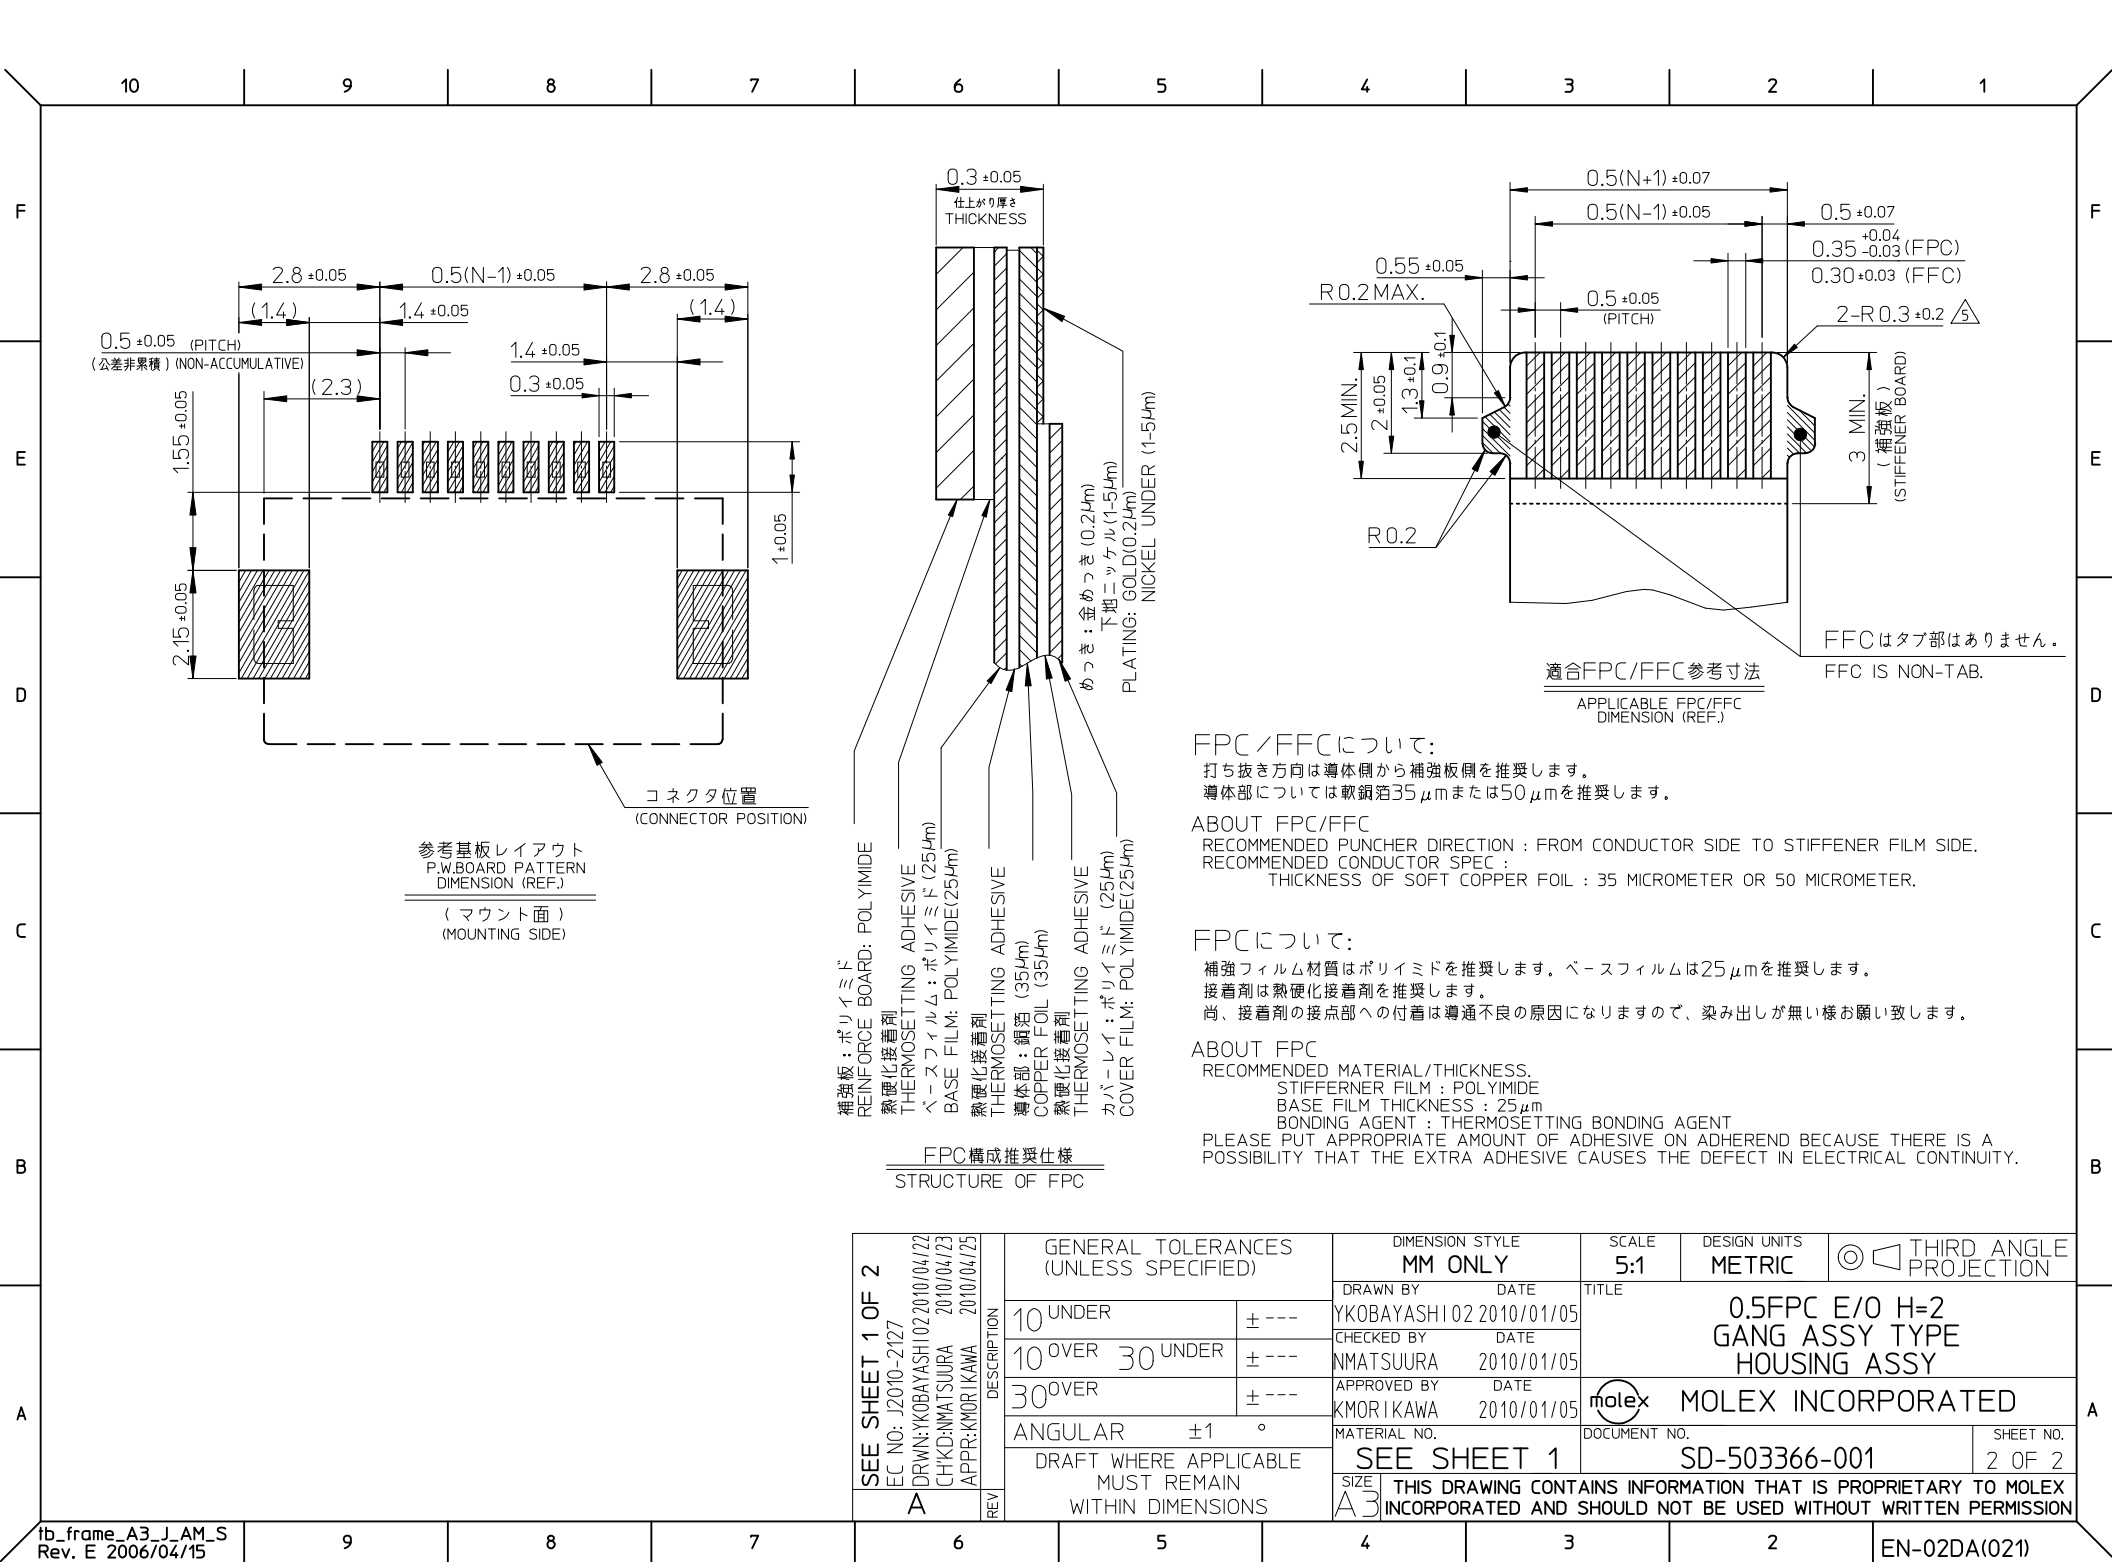

10 9 8 7 6 5 4 3 2 1

F

E

D


C

B



A

引き出し方向

PULL OUT
DIRECTION

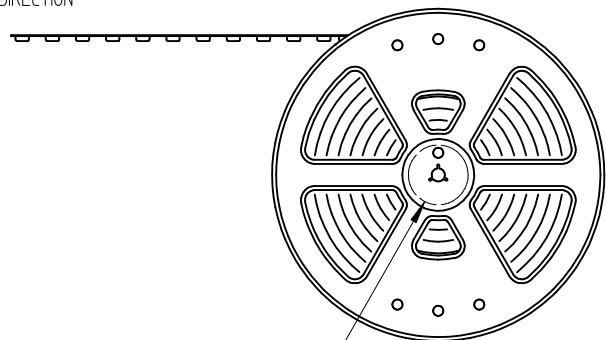

"E"

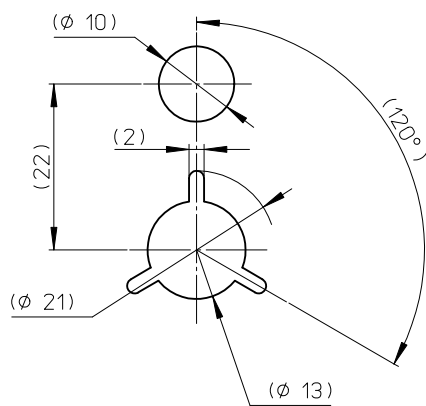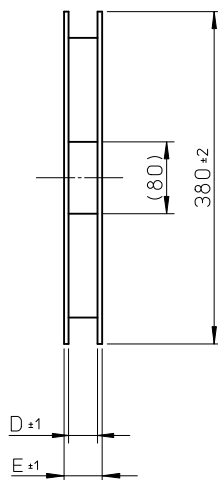


DETAIL "E"

NOTES

1. 梱包数量 : 2000個/リール
NUMBER OF CONNECTORS : 2000PIECES/REEL

2. リードテープ長さ
LEAD TAPE LENGTH

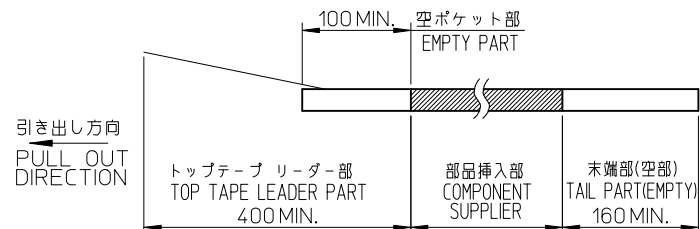

3. 製品詳細寸法については図面 SD-503366-001を参照下さい。
FOR DIMENSIONS OF PRODUCT, REFER TO SD-503366-001.

4. 材料 MATERIAL

キャリアテープ : ポリスチレン

CARRIER TAPE : POLYSTYRENE

トップテープ : ポリエチレンテレフタレート, ポリエチレン

TOP TAPE : POLYETHYLENE TEREPHTHALATE, POLYETHYLENE

リール : ポリスチレン<リサイクル材を含む>



REEL : POLYSTYRENE<RECYCLE MATERIAL CONTAINED>

5. ELV及びRoHS適合品 ELV AND RoHS COMPLIANT

REVISED EC NO: J2010-2127 DRWN: YKOBAYASHI 02 2010/04/22 CHKD: NMATSUURA 2010/04/23 APPR: KMORIKAWA 2010/04/25	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 5:1	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION
		10 UNDER	± ---	DRAWN BY YKOBAYASHI 02	DATE 2010/01/05	TITLE 0.5FPC E/O H=2 GANG ASSY TYPE EMBSTP PACKAGE		
		10 OVER 30 UNDER	± ---	CHECKED BY NMATSUURA	DATE 2010/01/05			
		30 OVER	± ---	APPROVED BY KMORIKAWA	DATE 2010/01/05			
		ANGULAR ±1 °		MATERIAL NO.		DOCUMENT NO.		
	A	REV	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE SHEET 2		SD-503366-002	
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION								

10 9 8 7 6 5 4 3 2 1

引き出し方向
PULL OUT DIRECTION

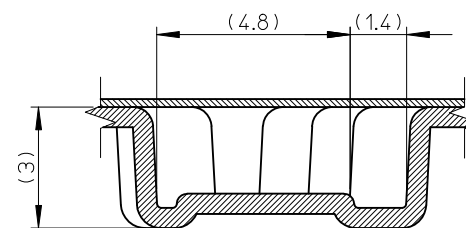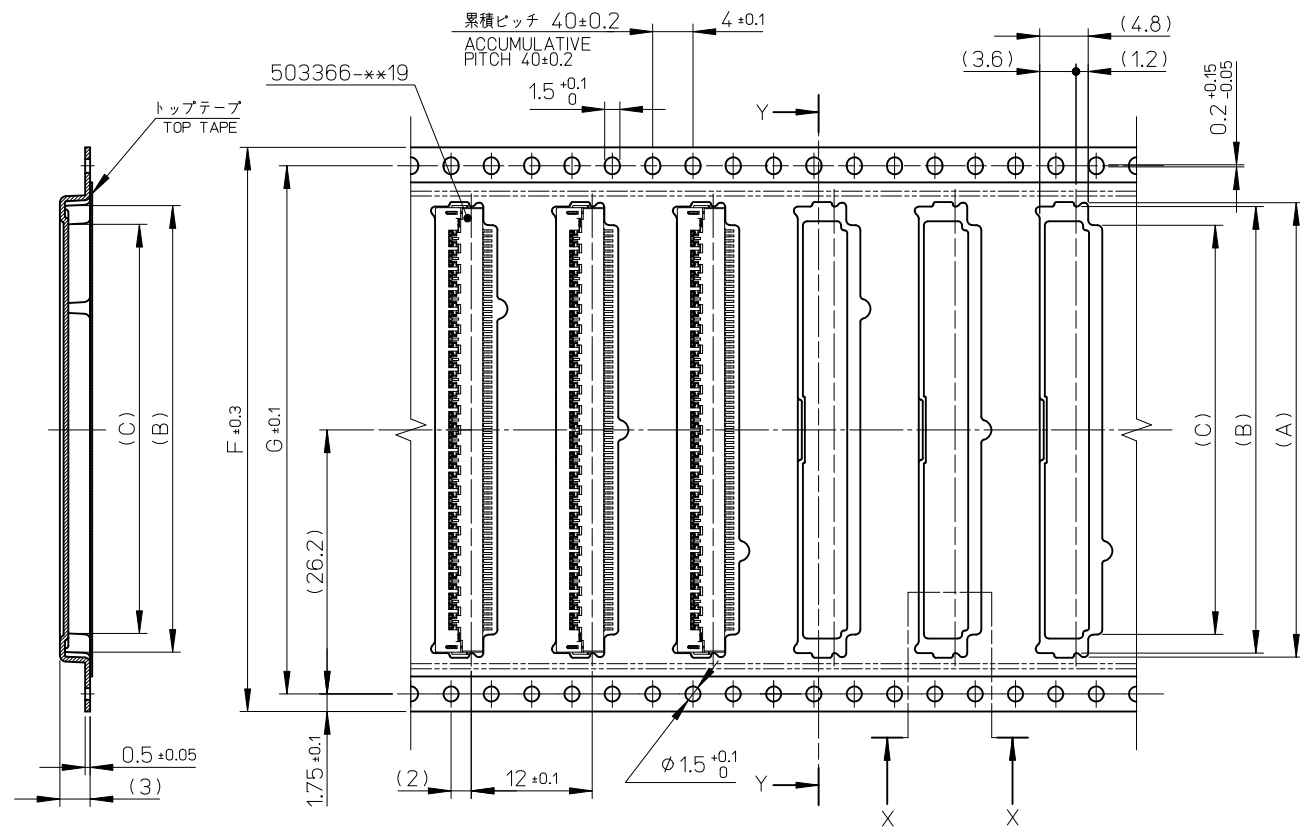

SECTION X-X
SCALE 8 : 1

SECTION Y-Y

56	52.4	56	61.4	57.4	40.6	44.3	45.1	503366-8011	80
	52.4	56	61.4	57.4	30.6	34.3	35.1	503366-6011	60
キャリアテープ幅 CARRIER TAPE WIDTH		G	F	E	D	C	B	A	製品番号 MATERIAL NO. 極数 CIRCUIT

SEE SHEET 1 OF 2 EC NO.: J2010-2127 DRWN: YKOBAYASHI 02 2010/04/22 CHKD: NMATSUURA 2010/04/23 APPR: KMORIKAWA 2010/04/25	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 2:1	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION			
		10 UNDER	± ---	DRAWN BY	DATE	TITLE 0.5FPC E/O H=2 GANG ASSY TYPE EMBSTP PACKAGE MOLEX INCORPORATED					
		10 OVER 30 UNDER	± ---	CHECKED BY	DATE						
		30 OVER	± ---	APPROVED BY	DATE						
		ANGULAR ±1 °		MATERIAL NO.					DOCUMENT NO.	SHEET NO.	
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						
	REV										