

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

-,-


©

COPYRIGHT - By -


ALL RIGHTS RESERVED.

REVISIONS




P	LTR	DESCRIPTION	DATE	DWN	APVD
	B	REVISED PER ECO-16-018632	05APR2017	SK	PO

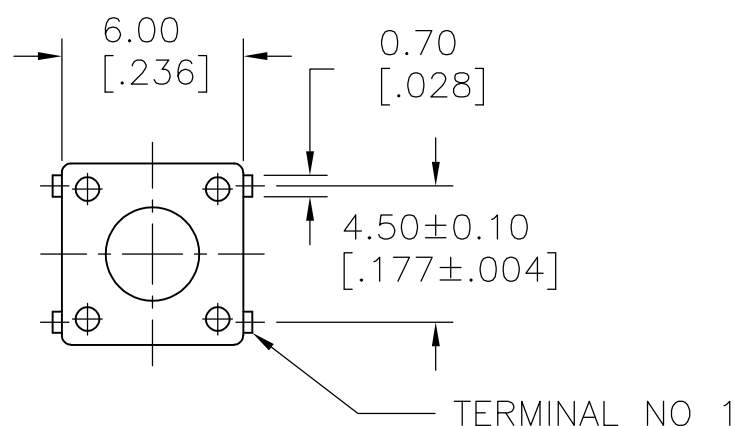

CIRCUIT DIAGRAM




- 1 ACTUATOR TRAVEL: $0.25^{+0.2}_{-0.1}$ [.010^{+0.008}_{-0.004}].
- 2 CONTACT RESISTANCE: 100mΩ MAX.
- 3 ELECTRICAL RATING: 12VDC @ 50mA MAX.
- 4 OPERATING TEMP: -20° TO 70°C
45-85% RH
- 5 STORAGE TEMP: -30°C TO 80°C.
(96 HOURS MAX @ CONTINUOUS TEMP OF
-20°C TO -30°C AND 70°C TO 80°C).
- 6 OPERATING LIFE: 100,000 CYCLES.
- 7 RIGHT AND LEFT VARIATION HAVE TO BE
IN 0.10 [.004] AFTER TERMINAL BENDING.

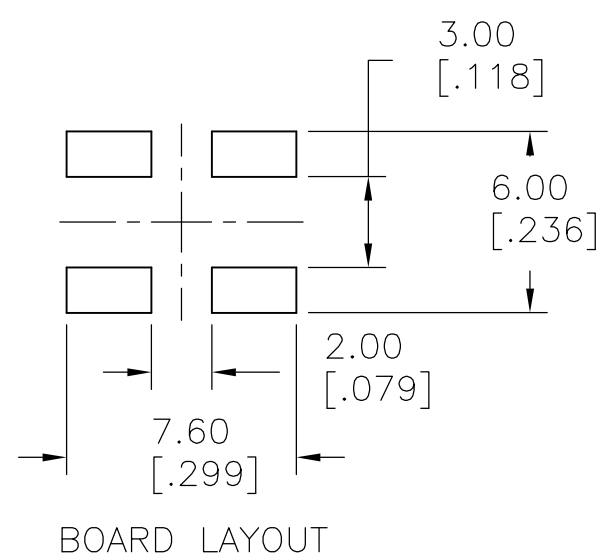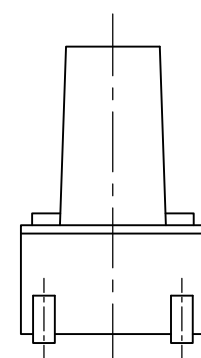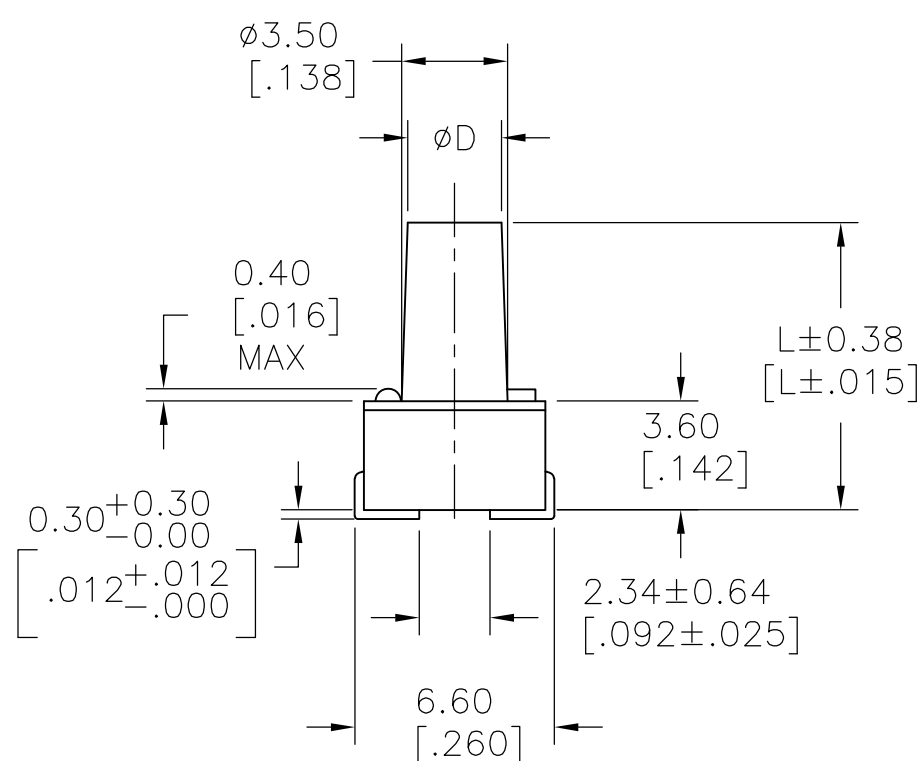

BOARD LAYOUT

OBSOLETE	BULK	160±50gf	BLACK	3.10 [.122]	9.50 [.375]	1977764-2
	TAPE & REEL	160±50gf	BLACK	3.10 [.122]	9.50 [.375]	1977764-1
	PACKAGE	O/FORCE	STEM COLOR	D(φ)	L	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN RAGHAVENDRA 13DEC10	 TE Connectivity			
DIMENSIONS: mm [INCHES]		CHK EPPLEY NAZ 13DEC10				
		APVD EPPLEY NAZ 13DEC10	NAME			
		PRODUCT SPEC	TACT SWITCH, J-LEADS			
MATERIAL		APPLICATION SPEC	-			
		WEIGHT	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
-		0	A3	00779	C-1977764	-
CUSTOMER DRAWING			SCALE	SHEET	REV	
			4:1	1 OF 2	B	

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

-,-






COPYRIGHT - By -

ALL RIGHTS RESERVED.

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

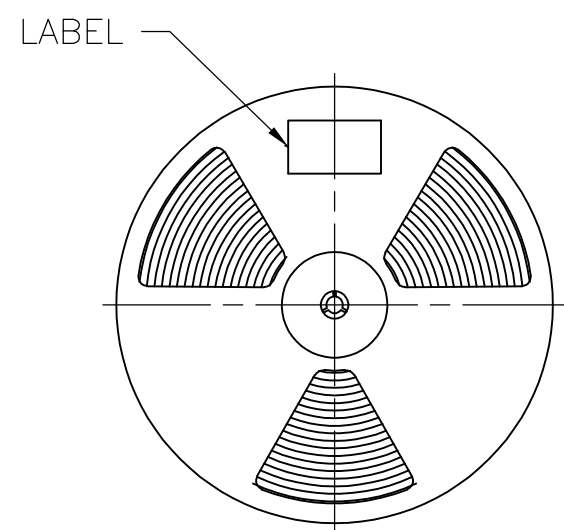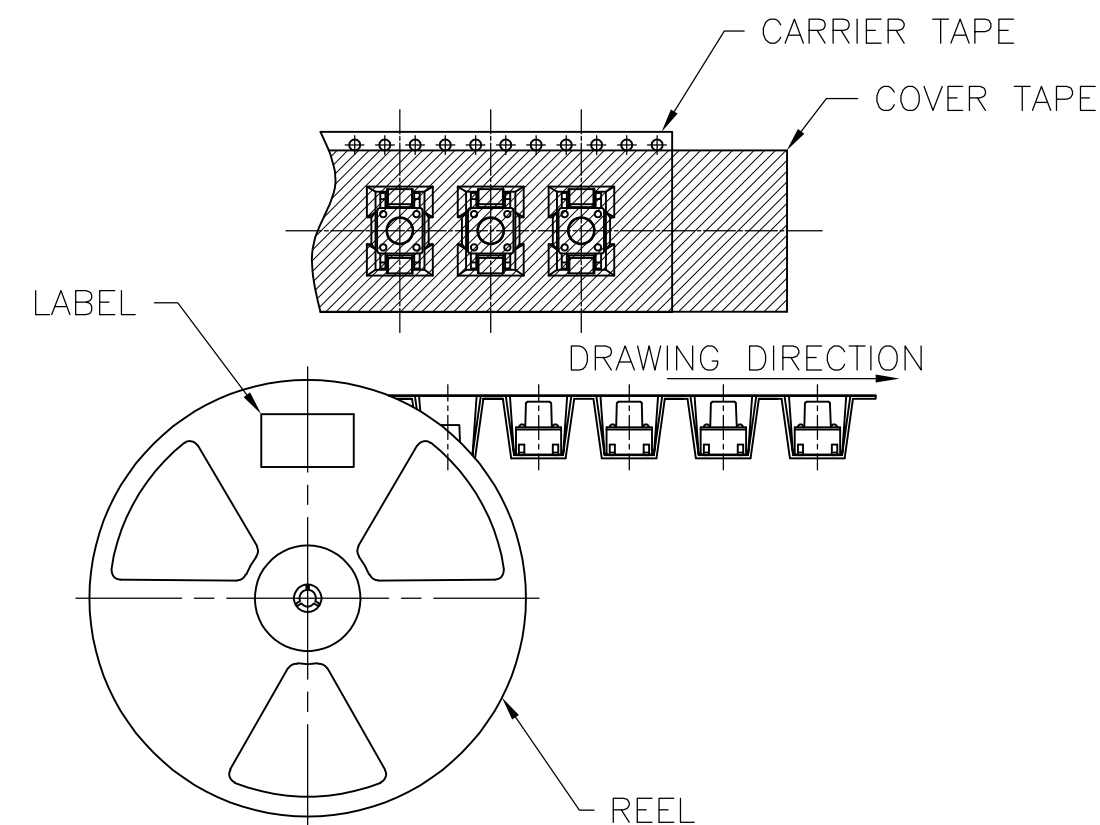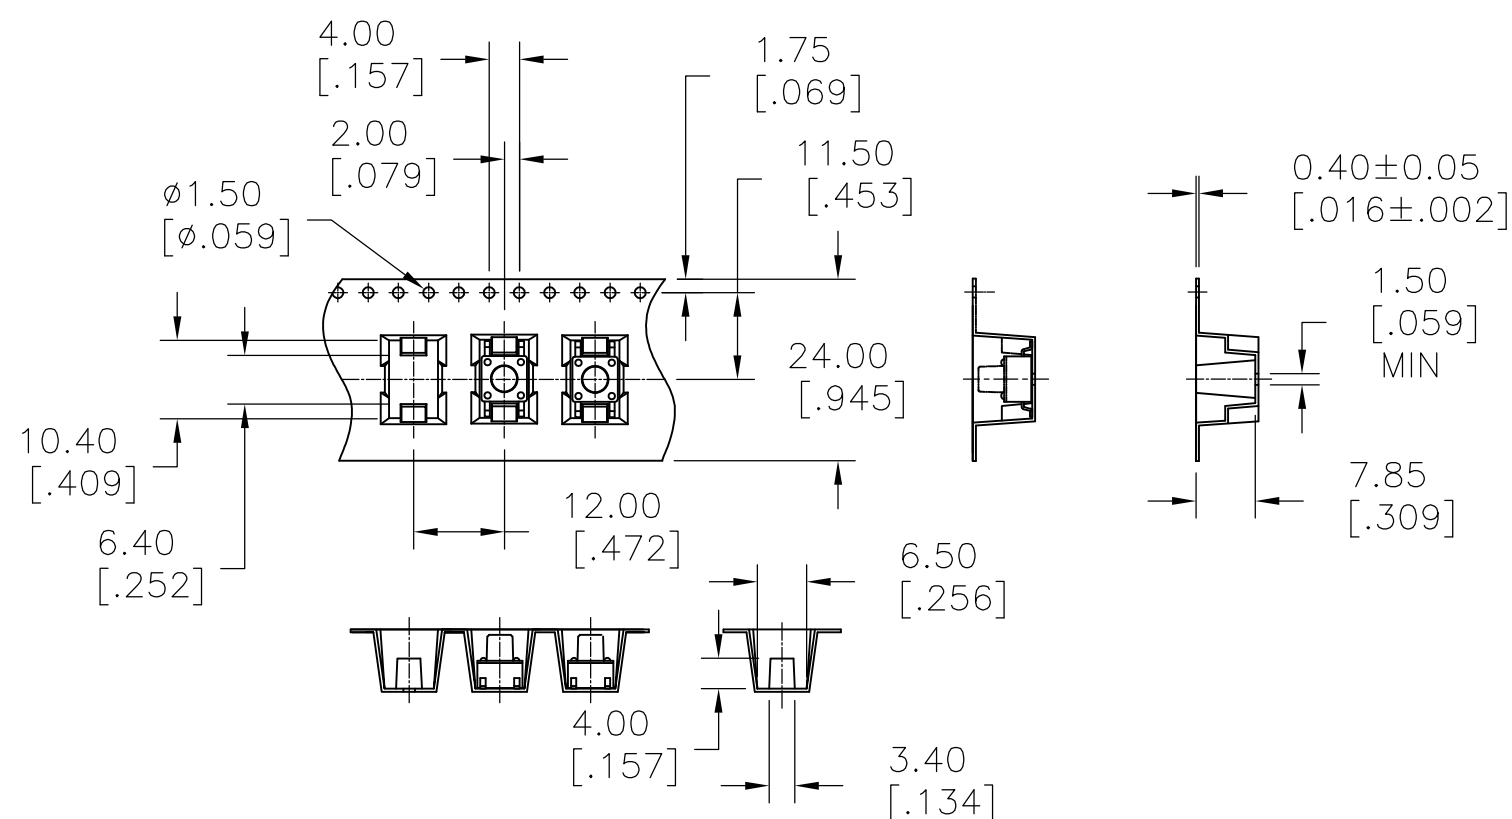

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:
	0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± 0.3[.012] 4 PLC ± - ANGLES ± - FINISH -
MATERIAL -	

DWN	RAGHAVENDRA	13DEC10
CHK	EPPELEY NAZ	13DEC10
APVD	EPPELEY NAZ	13DEC10
PRODUCT SPEC	-	
APPLICATION SPEC	-	
WEIGHT	-	
CUSTOMER DRAWING		



TE Connectivity

NAME			
TACT SWITCH, J-LEADS			
SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-1977764	-
SCALE		SHEET	REV
4:1		2 OF 2	B