


A-C-D-301-01

② BRAZED SEAM

WIRE SIZE: 22-18 AWG
25-1.5 MM²

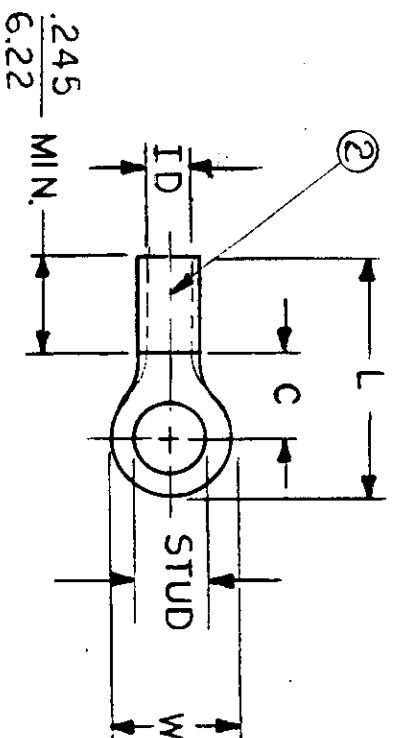

PART NUMBER	"W" ±.010	"C" MIN.	"L" MAX.	"ID" MIN.	AVAILABLE STUD SIZES	STOCK THICKNESS
A-320-	.225 5.72	.157 3.99	.563 14.30	.062 1.57	02, 04, 06	.028 ^{+.001} _{-.000} .71
A-321-	.312 7.92	.270 6.86	.720 18.29	.062 1.57	06, 08, 10	.028 ^{+.001} _{-.000} .71
A-322-	.467 11.86	.386 9.80	.914 23.22	.062 1.57	10, 14, 56	.031 ^{+.001} _{-.000} .79
A-326-	.534 13.56	.552 14.02	1.113 28.27	.054 1.37	10, 14, 56, 38	.028 ^{+.001} _{-.000} .71
A-332-	.254 6.45	.240 6.10	.661 16.79	.062 1.57	04, 06, 08	

DIMENSIONAL TOLERANCES UNLESS OTHERWISE SPECIFIED		REFERENCE	SCALE: NTS	DATE	TITLE:
FRAC.	DEC.	ANG.			
±	±	±			
			DRWN. BY: JJ	11-28-64	RING TONGUE TERMINAL VERSAPRIMP 300 SERIES
			CHKD. BY: GZ	12-4-84	
			APPRD. BY:		

DWG. NO.	A	CUSTOMER DWG.
----------	---	---------------



ETC Incorporated