
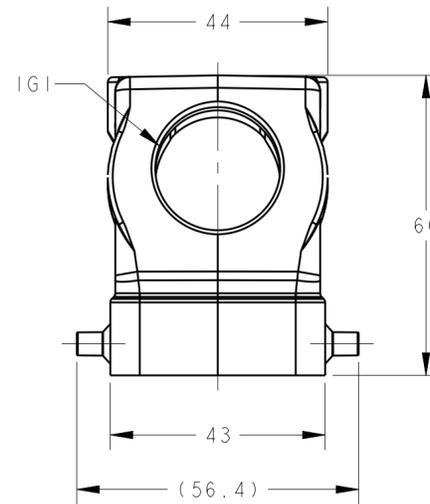
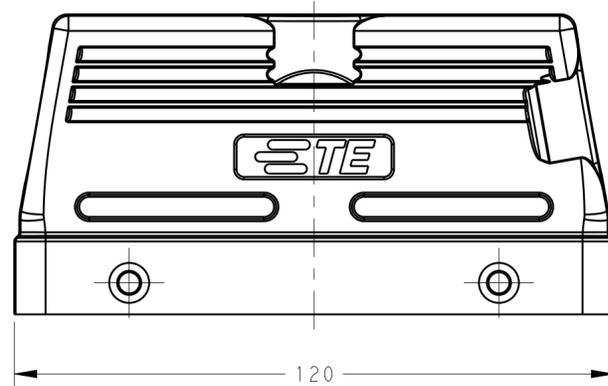





THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
 © COPYRIGHT 20 BY - ALL RIGHTS RESERVED.

REVISIONS				
P	LTR	DESCRIPTION	DATE	APVD
	A	INITIAL	03JUN2015	DW CW

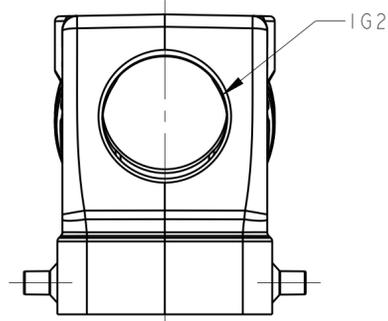

NOTES:
 1. TECHNICAL CHARACTERISTICS:
 HOOD MATERIAL: DIE CAST ALUMINIUM ALLOY
 SURFACE: POWDER COATED, GREY
 OPERATION TEMPERATURE: -40-+125°C
 DEGREE OF PROTECTION: IP65 (MATED)

注释:
 1. 技术参数:
 上壳材料: 铝合金
 表面处理: 粉末涂层, 灰色
 工作温度: -40-+125°C
 防护等级: IP65(配合)

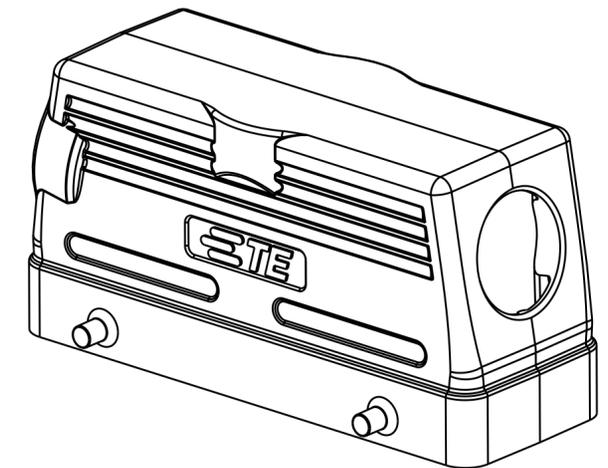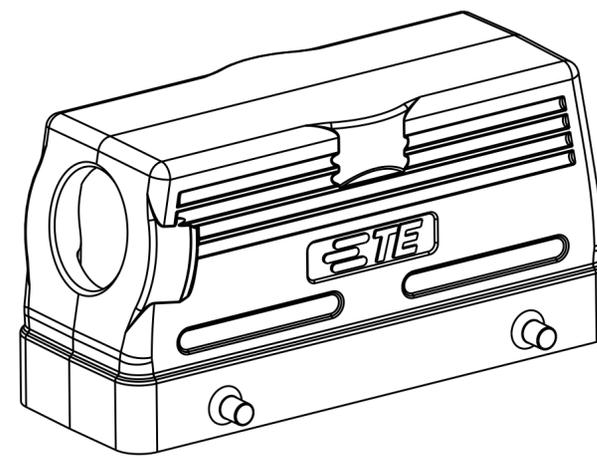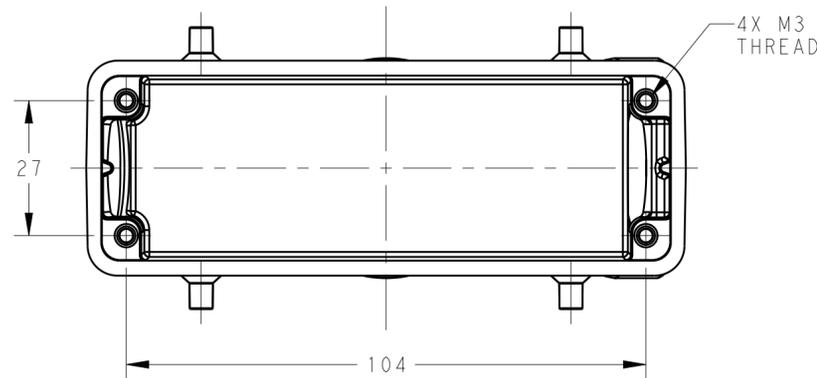

T1210240225-000	H24B-TS-2M25	M25	M25
T1210243216-000	H24B-TS-M32/M16	M32	M16
PART NUMBER	DESCRIPTION	IG1	IG2

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 03JUN2015 David Wang	STE TE Connectivity	
		CHK 03JUN2015 Chris Wang		
		APVD 03JUN2015 Xiang Xu	NAME H24B-TS-2M	
DIMENSIONS:		PRODUCT SPEC	SIZE CAGE CODE DRAWING NO	
mm		108-137013	A200779 C-T121024XXXX000	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPLICATION SPEC	RESTRICTED TO	
0 PLC ±		114-137013	-	
1 PLC ±		WEIGHT	SCALE 1:1 SHEET 1 OF 1 REV A	
2 PLC ±		-		
3 PLC ±		Customer Drawing		
4 PLC ±				
ANGLES ±				
FINISH				