


REVIEWS		RELEASED	APPROVED
REV.	DESCRIPTION	DATE	
E 22635	REDRAWN, ADDED NOTE 3.	93/01/27	WS
F 32627	FIND NOS 5 & 6 ADDED	97/04/14	RS
G 11-02247	REMOVED ITEMS 5 & 6	11/09/25	CB
H 12-020166	ADDED NOTE 4	12/11/15	MM

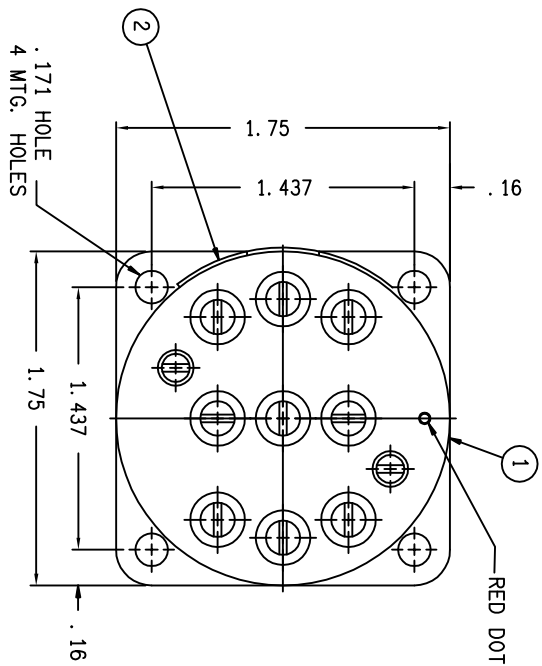

CONSTRUCTION

HERMETICALLY SEALED
3PDT SIDESTABLE

VOLTAGE (NOMINAL)
CURRENT: RES.

IND.
MOTOR


115/200 VAC 400 HZ
25 AMP
20 AMP
15 AMP

COIL DATA: DUTY CYCLE
NOM. COIL VOLTAGE
PICKUP MAX.
DROPOUT VOLTAGE
RESISTANCE

CONTINUOUS
28 TO 31 VDC
18 VDC
1.5 V TO 7.0 V
290 OHM # 20% AT 25


ENVIRONMENTAL DATA
AMBIENT TEMP.
ALTITUDE
LIFE ELECTRICAL
LIFE MECHANICAL
WEIGHT MAX. (EST.)

-55 TO + 71
80,000 FT. MAX.
50,000 CYCLES MIN.
100,000
6.5 OZ.

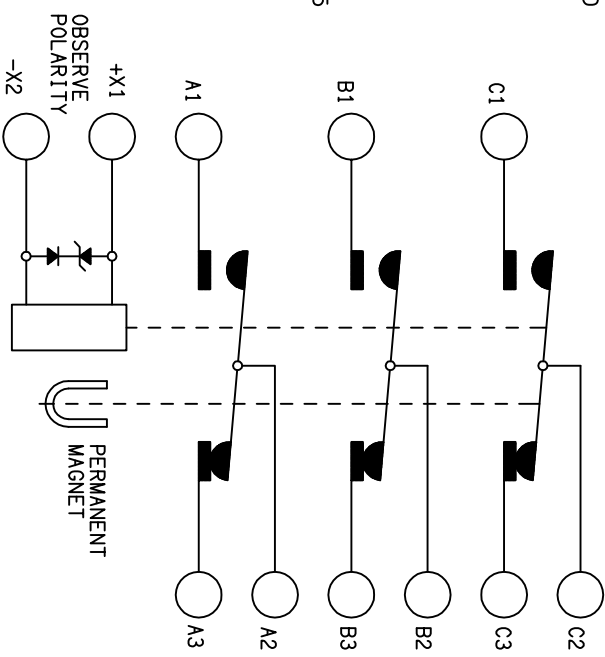

NOTE:

1. COIL TRANSIENT VOLTAGE LIMITED TO #42 V REF. TO ZERO V.
2. TRANSFER TIME 1.5 MS. MIN. AT 28 VDC AT 25.
3. CHECK ORIENTATION OF HOOK TERM. B2 TO CORRECTLY PLACE THE RED DOT ON THE UNIT.
4. ILLUSTRATIONS FOR REF. ONLY. PRODUCT MEETS ALL FUNCTIONAL AND DIMENSIONAL REQUIREMENTS.

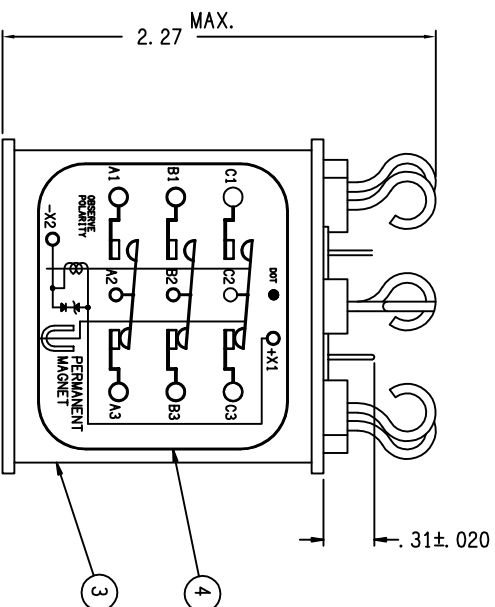

6					
5					
4	1	35119-001	PLATE – WIRING DIAGRAM		
3	1	20473-070	CONTACTOR ASSEMBLY – PRI.		
2	1	17959-001	PLATE – WARNING		
1	1	16043-001	PLATE – NAME		
FTND QTY RECD		PART OR IDENTIFYING NO	NOMENCLATURE OR DESCRIPTION	FSCM NO	DRAWING OR SPECIFICATION
					MATERIAL OR NOTE

THE

De HartmanTM Division • 175 N. DIAMOND STREET
MANSFIELD, OHIO 44902

CONTACTOR - 3PDT SIDESTABLE

25 AMP, 115/200V, 400HZ

SIZE	CODE IDENT
C	74063

DWG NO.	7
---------	---

DH-14B-3

SCALE	NONE	SHEET
-------	------	-------

REF ID: A616037-1