

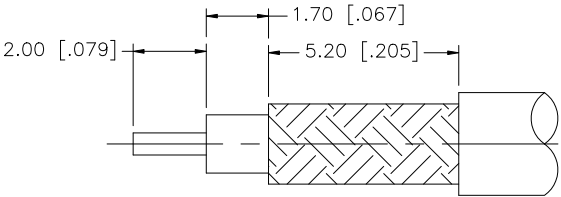
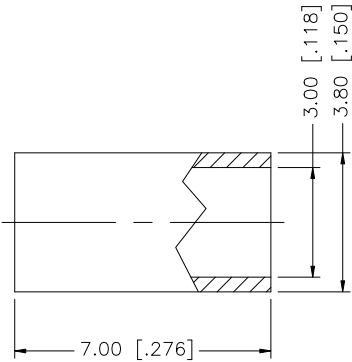


REV.	DATE	ECR NO.	DESCRIPTION
NC	08/13/07	—	INITIAL RELEASE
A	03/24/09	—	UPDATE BARREL, CONTACT PIN, FERRULE DIMENSIONS

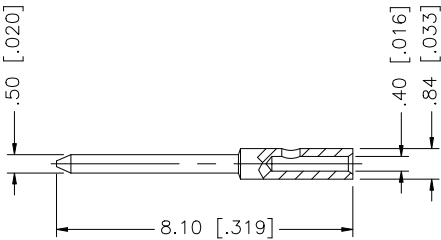

RECOMMENDED CABLE
STRIPPING DIMENSIONS

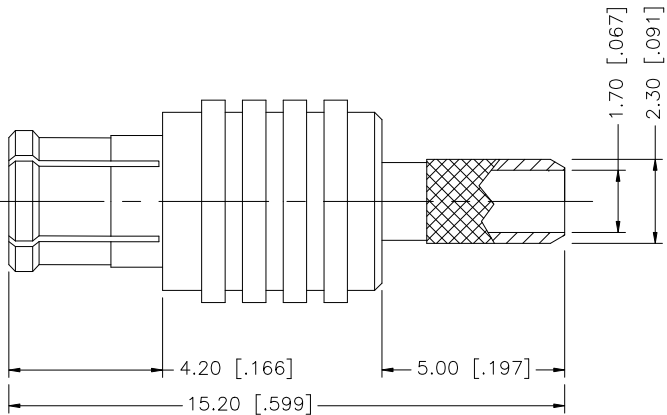

- NOTE:
1. CRIMPED FERRULE HEX CRIMP SIZE .128" [3.25]
 2. CONTACT PIN TO SOLDER.

				UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020” DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex				
8					DRAWN	GRS	03/24/09						
7					CHECKED								
6					ISSUED				PART DESCRIPTION MCX CRIMP PLUG (FOR RG-179A/U, 179B/U, 187A/U)				
5	FERRULE	COPPER	GOLD		1	SHEET	1 OF 1						
4	CONTACT PIN	BRASS	GOLD		1					PART NO. 252101-75			
3	INSULATOR	PTFE	NATURAL		1								
2	BODY	BER. COPPER	GOLD							DWG. NO. 252101-75.DWG REV. A SIZE A SCALE NA			
1	HOUSING	BRASS	GOLD	1									
DESCRIPTION				MATERIAL	FINISH	QTY	C:/252/252101-75.DWG						