




TOP VIEW



SIDE VIEW

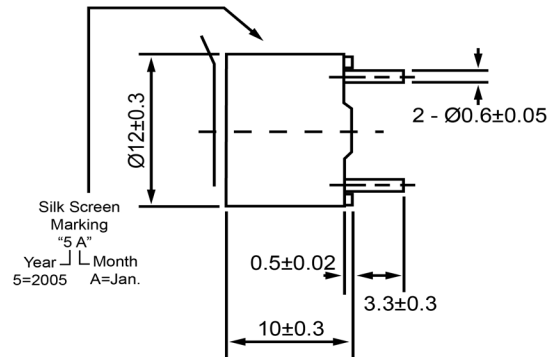

BOTTOM VIEW



Specifications

Description	Value	Unit
Technology	Electro-Mechanical	
Resonant Frequency	2,400	(Hz)
Rated Voltage	5	(V)
SPL @ 10cm	85	(dBA)
Coil Resistance	40	(ohm)
Mount Type	Thru Hole	
Voltage Range	3 ~ 8	(V)
Max Rated Current	50	(mA)
Housing Material	NORYL	
Operating Temperature	-40 ~ +85	°C
Storage Temperature	-40 ~ +85	°C
Weight	2	(g)

Notes

- 1) All dimensions are in mm unless otherwise noted
 2) All parts meet RoHS



DB UNLIMITED

Electro-Mechanical Transducer

Revision History

Version	Description		Date	Approved	
1	Released from Engineering		10/21/2013	J.S	

TE122405-2