


\*WGC NO. 603225

| UNIT OF MEASURE | A    | B     | C    | D    | E    | L    |  | MAX. BUNDLE DIA. | MIN. TENSILE STRENGTH |
|-----------------|------|-------|------|------|------|------|--|------------------|-----------------------|
| INCHES          | .393 | .501  | .299 | .325 | .063 | 8.93 |  | 2.0              | 120 lbs.              |
| MM              | 9.98 | 12.72 | 7.59 | 8.26 | 1.60 | 226. |  | 50.8             | 54.43 kg.             |

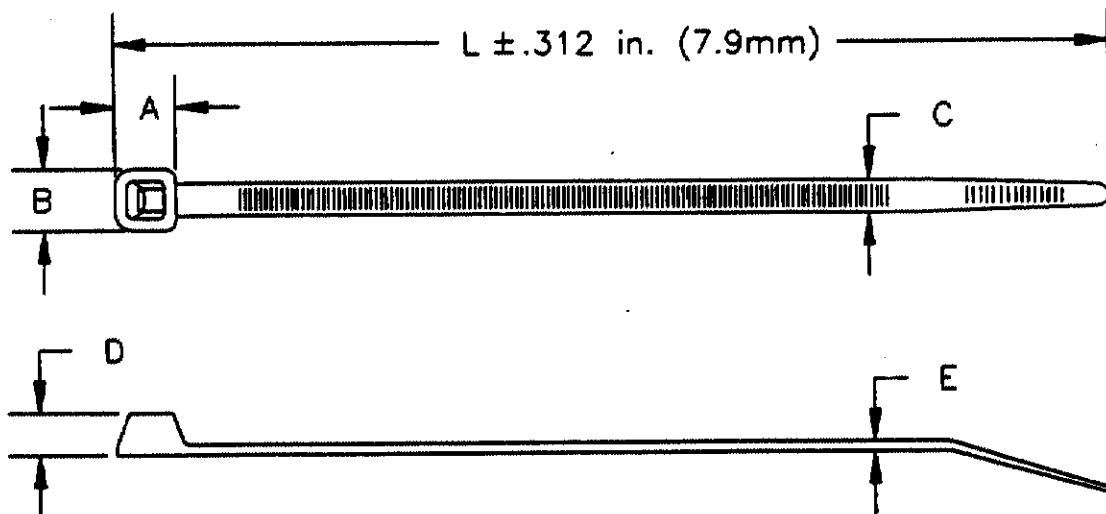

## NOTES:

1. MOISTURIZED 1 TO 2.5% WATER.
2. PACKAGED IN HEAT SEALED 3 MIL POLYBAG WITH LABEL PER DWG 404707.

△ OBSOLETE

△ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

APC ENGINEERING

JUL 13 1990

ISSUED BY *Allen*

CUSTOMER  
DRAWING  
UNPUBLISHED

|              |                   |
|--------------|-------------------|
| 3-603225-9   | NATURAL 500 TY2HL |
| 3-603225-0 △ | BLACK 500 TY2HLB  |
| 4-603225-9 △ | NATURAL 50 TY2HD  |
| 4-603225-0   | BLACK 50 TY2HDB   |

| DWG SIZE | PART No. | DESCRIPTION | ITEM NO |
|----------|----------|-------------|---------|
|----------|----------|-------------|---------|

REVISION OF EACH ASSY NO. (WHEN BLANK, USE DWG REVISION)

QTY. REQ'D. PER ASSY.

## PARTS LIST

|           |              |                                               |                        |               |              |
|-----------|--------------|-----------------------------------------------|------------------------|---------------|--------------|
| LOC<br>D  | 3-603225-9   |                                               | NATURAL 500 TY2HL      |               |              |
| DIST<br>1 | 3-603225-0 △ |                                               | BLACK 500 TY2HLB       |               |              |
|           | 4-603225-9 △ |                                               | NATURAL 50 TY2HD       |               |              |
|           | 4-603225-0   |                                               | BLACK 50 TY2HDB        |               |              |
|           |              | MATERIAL                                      | HEAT TREAT             | FINISH        |              |
|           |              | NYLON 6/6                                     |                        |               |              |
|           |              | DIMENSIONS ARE IN INCHES                      | DRAWN BY:              | DATE:         | APPROVED BY: |
|           |              | TOLERANCES UNLESS OTHERWISE SPECIFIED:        | AD-TEK/VL              | 6/25/90       |              |
|           |              | 2 PL DEC ±                                    | CHECK BY:              | RELEASE:      |              |
|           |              | 3 PL DEC ± .039                               | BJM 6/90               | J. Hamed 6/90 |              |
|           |              | 4 PL DEC ±                                    | AMP   AMP INCORPORATED |               |              |
|           |              | ANGLES ±                                      | Harrisburg, Pa.        |               |              |
|           |              | SURF TEXTURE: J                               | NAME: HEAVY DUTY       |               |              |
|           |              | REMOVE BURRS, BREAK SHARP EDGES, .015 R. MAX. | CABLE TIE 8-7/8 INCH   |               |              |
|           | B1           | REVISED PER ECO-09-026444                     | AEG                    | 28NOV 89      |              |
|           | ✓ B          | ECN 062890                                    | Jmr                    | 6/90          |              |
| P         | F            | LTR                                           | REVISION RECORD        | APC           | DATE         |
| SCALE: A  |              | DRAWING No.: 603225                           |                        | SHEET: 1 OF 1 | REV.: B1     |