





Tous droits strictement reserves. Reproduction ou communication a des tiers interdite sous quelque forme que ce soit sans autorisation ecrite du proprietaire. Propriete de c FCI. Droits de reproduction FCI.

FCI

All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietor. Property of FCI. Copyright FCI.

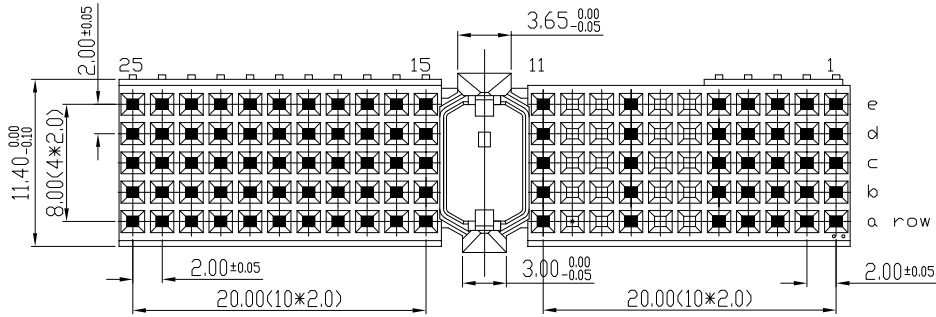

□ EMPTY CAVITY
■ CAVITY LOADED WITH CONTACT

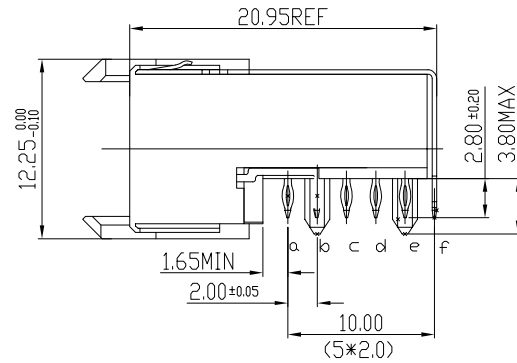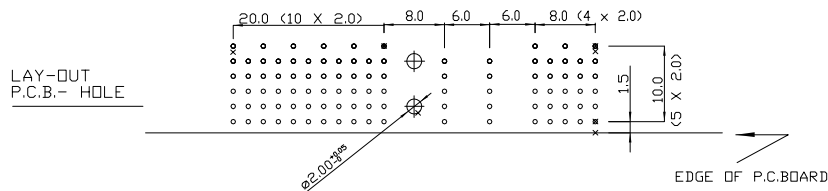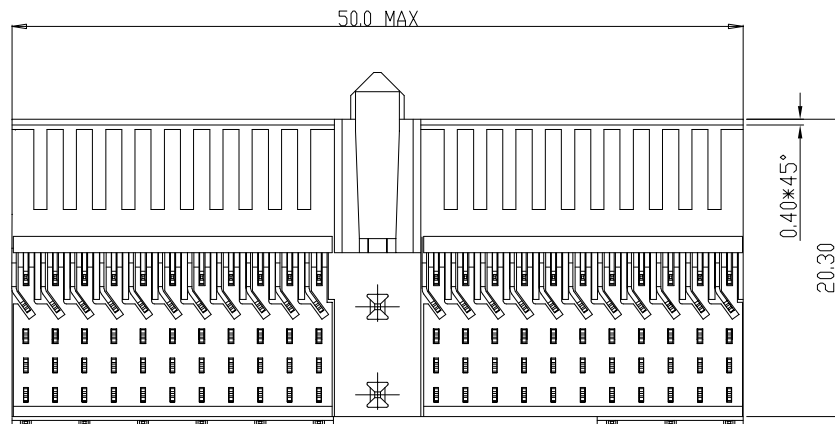

PERFORMANCE CHARACTERISTICS

CURRENT RATING 1.5A AT 20°C (FULLY LOADED)
1 A AT 70°C (FULLY LOADED)

RATED VOLTAGE : 500 V AC (CONT /CONT)

OPERATING TEMPERATURE : -55°C TO 125°C

CONTACT RESISTANCE 20 mΩ MAX

INSERTION FORCE : 0.75N MAX/CONT

EXTRACTION FORCE : 0.15N MIN/CONT

INSULATION RESISTANCE : 10⁴ MΩ MIN

- NOTES 1. LEAD FREE INDICATOR (LF=LEAD FREE)
PERFORMANCE LEVEL INDICATOR
(REF DWG NO.BSC .201844.003)
2. THIS PRODUCT IS CSA APPROVED.
THIS PRODUCT IS UL RECOGNIZED.
3. FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING :
BS.A.201572.001
4. THIS PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVES AND
OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008

Material			Spec ref			
Mat code			✓	tolerance	projection	
Heattreat				1DEC±0.2 1DEC 2DEC ± 0.10 2DEC ANGLES±1°10EKEN	 MM	
Plating/Finish						
Dr	M.Fret	04-08-99			size	Scale
Eng			Product family	MILLIPICS	A4	1.500
Chr			Model Name		ECN	
Appr			Model Revision		REL Level	
		title			dwg no	Rev.
		MPACS 5+2R RA RCP CONN			BS,C ,202468,017	B
Pro/E file		catalog no		HM2R01PACA39----	CUSTOMER	sheet 1 of 1