
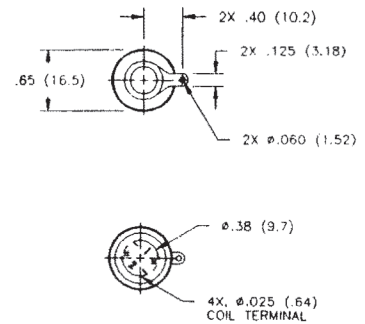
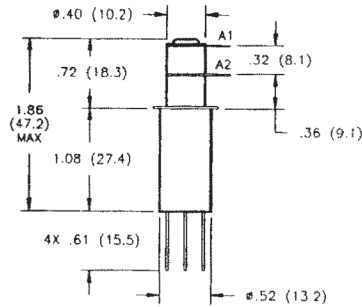


K40P Make & Break Load Switching — 5.0 kV Relays



Product Facts for K40P

- Vacuum dielectric for power switching low current loads
- Fast, 1 millisecond operate time
- Long life: 10 million cycles
- 35 Amps continuous current rating at DC; 8 Amps at 32 MHz
- Ideal for high power antenna couplers
- Meets requirements of MIL-R-83725

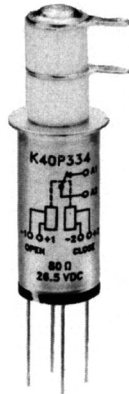

Product Facts for K40P364

- Double sided terminals for ease of connection to bus bar
- Vacuum dielectric for power switching low current loads
- Fast switching, high current capabilities
- Small and lightweight

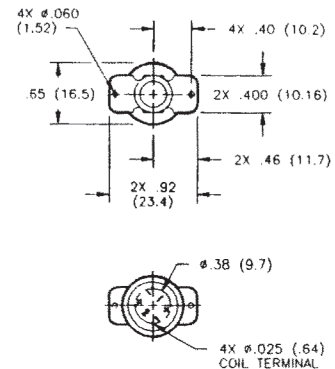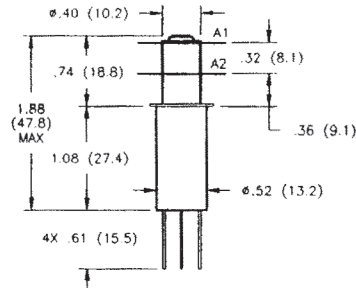

Product Specifications

Contact Arrangement —
SPST-Latching

Contact Form — P

Test Voltage, DC or 60 Hz (Peak) —
6 kV

Rated Operating Voltage (Peak) —
DC or 60 Hz — 5 kV
2.5 MHz — 4.5 kV
16 MHz — 3.5 kV
32 MHz — 2.8 kV

Continuous Carry Current, Max. —
DC or 60 Hz — 35 A
2.5 MHz — 21 A
16 MHz — 14 A
32 MHz — 8 A
Coil Hi-Pot (Vrms, 60 Hz) — 500 A

Contact Capacitance —

Between Open Contacts — 1.2 pF
Open Contacts to Ground — 1.2 pF

Contact Resistance, Max. —
0.02 ohm

Operate Time, Max. — 1 ms

Release Time, Max. — N/A

Shock, 11ms, 1/2 Sine (Peak) —
50 g

Vibration —
Peak — 30 g (55 to 2000 Hz)

Operating Ambient Temperature Range — -55°C to +125°C

Mechanical Life — 10 million cycles

Weight, Nominal —
28.35 g (1.0 oz.)

Coil Data

Volts, Nominal	26.5 Vdc
Reset & Latch, Max.	16 Vdc
Dropout	N/A
Coil Resistance (±10%)	80 Ω

Ratings listed are for 25°C, sea level conditions.

Ordering Information

Sample Part Number ▶

Series:

Contact Form:
P = SPST-Latching

Coil Voltage:
3 = 26.5 Vdc, Bus Wire

High Voltage Connections:
3 = Solder Connection
6 = Double Sided Solder Connection

Mounting:*
2 = Flanged
4 = Standard

*See page 7-87 for mounting methods.

For factory-direct application assistance,
dial 800-253-4560, ext. 2055, or
805-220-2055.