

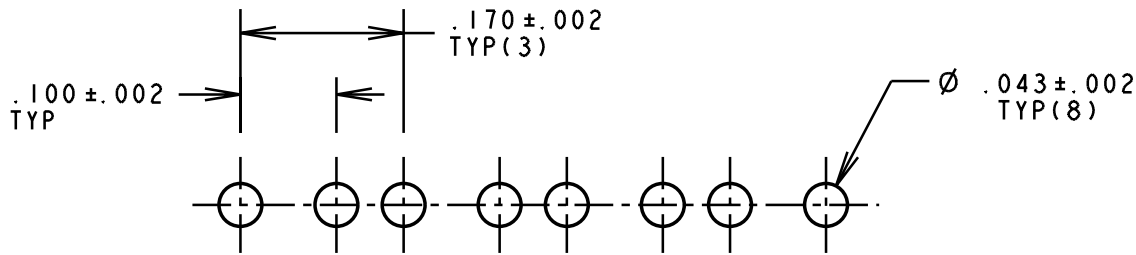
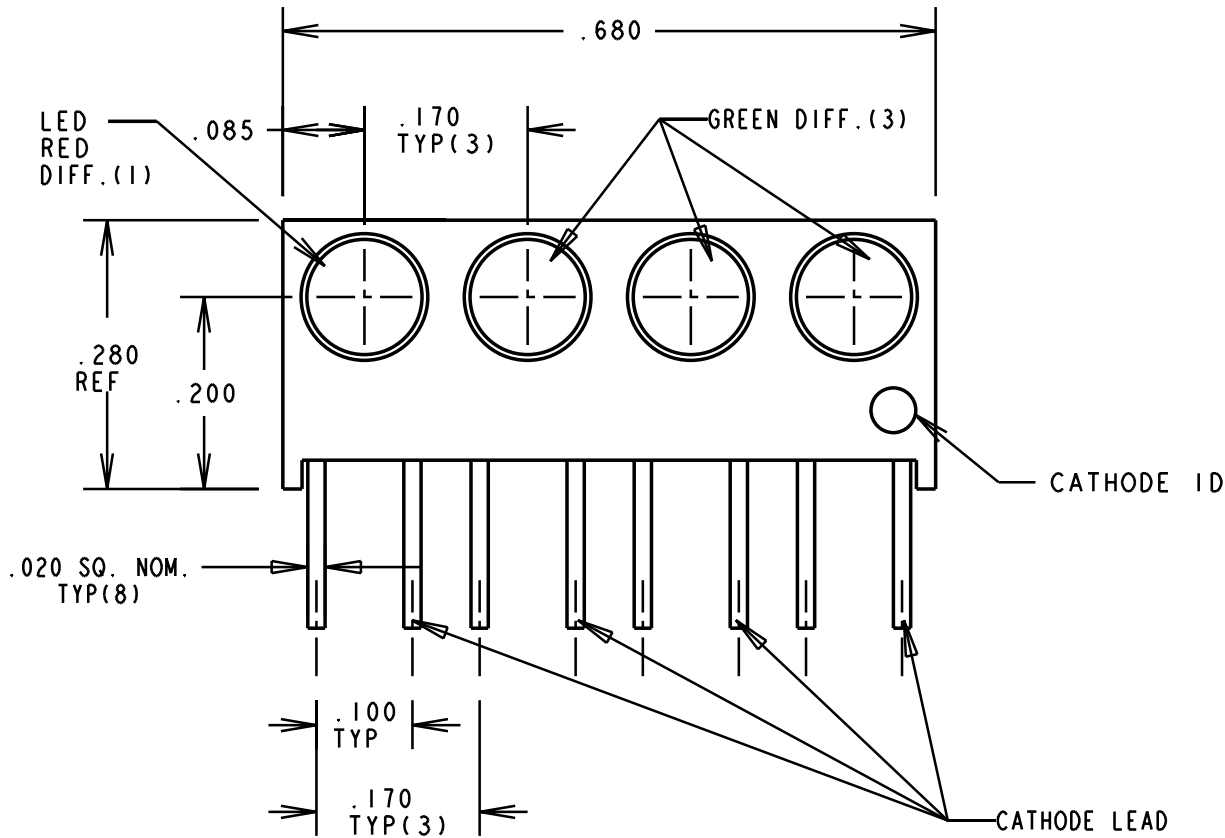


REV.	ECN NO.	REVISIONS	DRN.	CKD.	APP.	DATE
A		NEW RELEASE	DC			

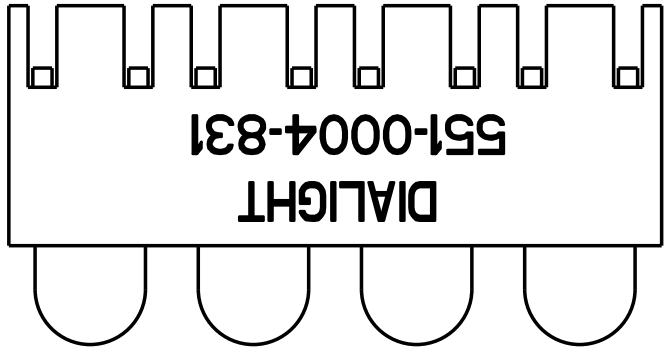

RECOMMENDED PC BOARD HOLE PATTERN

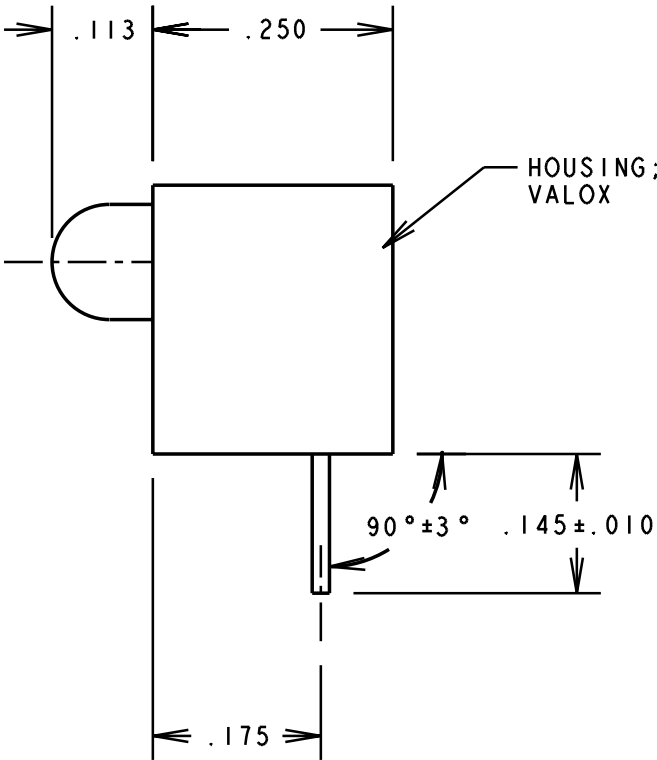

OPERATING CHARACTERISTICS AT T_A = 25 °C

SYMBOL	PARAMETER	COLOR	MIN	TYP	MAX	UNITS	TEST COND.
V _F	FORWARD VOLTAGE	RED		2.0	3.0	V	I _F = 10mA
		GREEN		2.1	3.0		
V _R	REVERSE VOLTAGE	ALL	3			V	I _R = 10µA
λ _{PK}	PEAK WAVELENGTH	RED		650		nm	
		GREEN		563			
I _V	LUMINOUS INTENSITY	RED	3.6	10		mcd	I _F = 10mA
		GREEN	5.6	16.0			

THIS DRAWING AND THE CONTENTS HEREIN ARE CONFIDENTIAL AND THE SOLE PROPERTY OF DIALIGHT. REPRODUCTION OF THIS DRAWING OR CONSTRUCTION OF ANY PARTS WITHIN THIS DRAWING ARE FORBIDDEN WITHOUT THE WRITTEN CONSENT OF DIALIGHT.

SCALE 5:1	DRAWING NUMBER		REV
ALL DIM'S IN: INCHES	C - 16560		A
TOLERANCES: UNLESS OTHERWISE SPECIFIED	TITLE		
FRACTIONS: ±1/64	3mm QUAD LED CBI		
DECIMALS (.XX): ±.020	MATERIAL		
DECIMALS (.XXX): ±.015			
ANGLES: ±3°			
FINISH:	Dialight	1913 ATLANTIC AVE. MANASQUAN, N.J. 08736	
FSCM 83330	SHEET OF	FAMILY TABLE:	

- NOTES:
- LEADS TO FIT INTO HOLES SPACED AS PER HOLE PATTERN.
 - LED LEAD DIMENSIONS SHOWN ARE MEASURED AT HOUSING EXIT.
 - DIALIGHT PART NUMBER: 551-0004-831.