

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION


© COPYRIGHT - BY - ALL RIGHTS RESERVED.

1 MATERIAL:
BODY, OUTER CONTACT & CENTER CONTACT - BERYLLIUM
COPPER ALLOY UNS C17300, CONDITION TD04, PER
ASTM B196




INSULATOR - TEFLON (PTFE) ROD, PER ASTM D1710

2 FINISH:
BODY & CENTER CONTACT - GOLD PLATE PER ASTM B488,
OVER NICKEL PLATE , PER SAE-AMS-QQ-N-290

LOC	DIST	REVISIONS					
-	-	P	LTR	DESCRIPTION	DATE	DWN	APVD
			C	REV PER ECO 12-008848	5-10-12	CT	WM

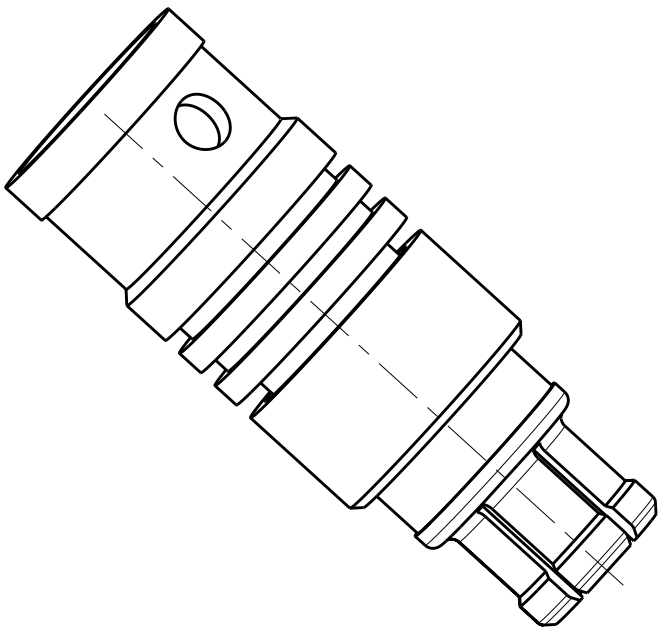

SCALE 10:1

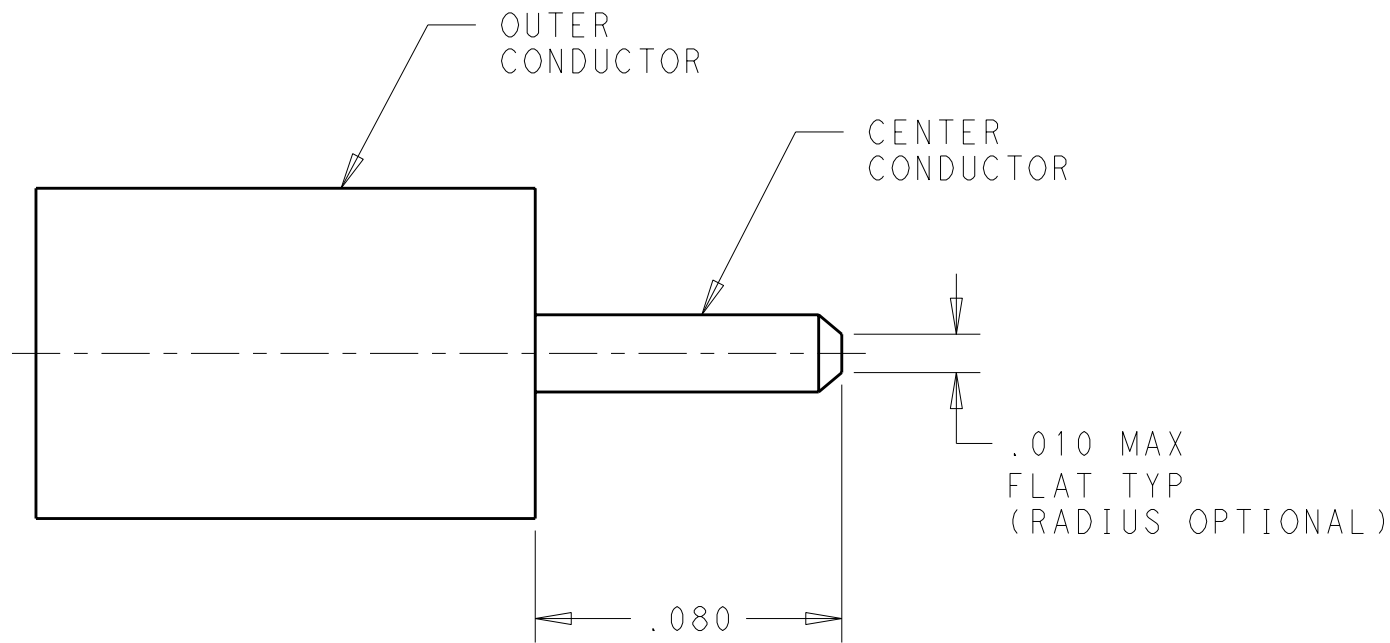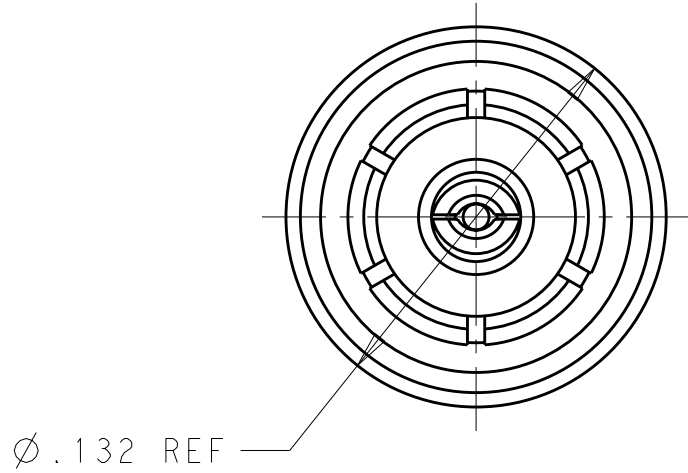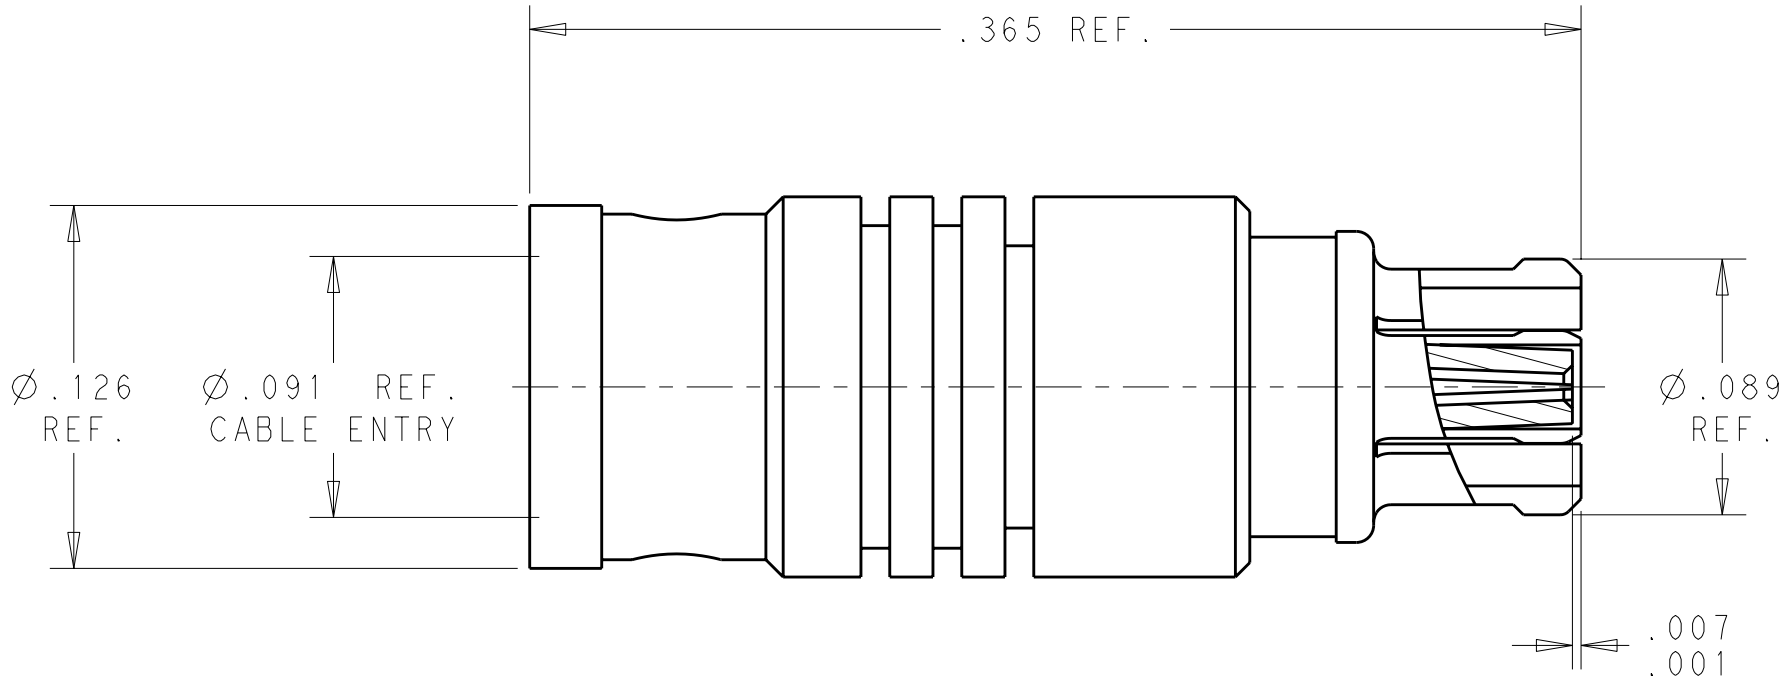

CABLE PREPARATION
FOR Ø.086 SEMI-RIGID & CONFORMABLE CABLES

1996328-1

PART
NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S T Morley CHK S T Morley APVD S T Morley	12SEPT2007 03SEP2010 03SEP2010	TE Connectivity		
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME SMPM STRAIGHT CABLE JACK (F) DIRECT SOLDER ATTACHMENT FOR .086 DIA, CABLES		
0 PLC ±.1 1 PLC ±.01 2 PLC ±.005 3 PLC ±.0005 4 PLC ANGLES ±1.0 FINISH		PRODUCT SPEC APPLICATION SPEC WEIGHT		SIZE A200779	DRAWING NO C-1996328	RESTRICTED TO -
MATERIAL 1 -		CUSTOMER DRAWING		SCALE 15:1	SHEET 1 OF 1	REV C