


Description

- Voltage controlled crystal oscillator in a ceramic package with a hermetically sealed metal lid
- Model IQXV-41
- Model Issue number 1

Frequency Parameters

- Frequency 16.3840MHz
- Frequency Stability $\pm 50.00\text{ppm}$
- Operating Temperature Range -40.00 to 85.00°C
- Ageing (@ 25°C): $\pm 3\text{ppm max}$

Electrical Parameters

- Supply Voltage $3.3\text{V} \pm 5\%$
- Current Draw 10.00mA

Frequency Adjustment

- Pulling $\pm 50\text{ppm min}$
- Control Voltage $1.65\text{V} \pm 1.65\text{V}$
- Input Impedence $100\text{k}\Omega \text{ min}$
- Linearity: 10% max

Output Details

- Output Compatability HCMOS
- Drive Capability 15pF max
- Rise and Fall Time 10.0ns max
- Duty Cycle $45/55\%$
- Start Up Time: 10ms max

Output Levels

- VoH: $>90\%$ of Vs
- VoL: $<10\%$ of Vs

Noise Parameters

- Period Jitter (pk-pk): 100ps max
- Period Jitter (one sigma): 25ps max

Environmental Parameters

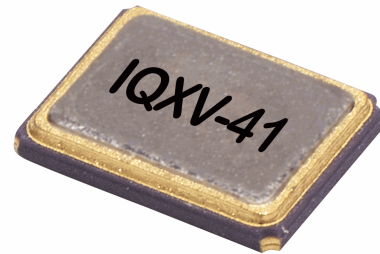
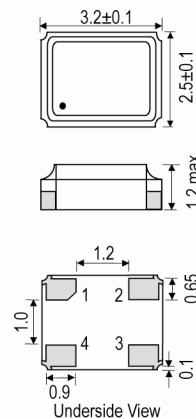
- Storage Temperature Range: -55 to 125°C
- Drop: 1.2m drop (3 times) onto a hard surface
- Vibration: 1.5mm amplitude, 10-55-10Hz, full sine wave, 2mins in 3 mutually perpendicular planes, duration 2hrs in each plane

Compliance


- RoHS Status (2011/65/EU) Compliant
- REACH Status Compliant
- MSL Rating (JDEC-STD-033): Not Applicable

Packaging Details

- Pack Style: Bulk Loose in bulk pack
- Pack Size: 1
- Alternative packing option available


Outline (mm)


Pad Connections
 1. Voltage Control
 2. GND
 3. Output
 4. +Vs


Sales Office Contact Details:

UK: +44 (0)1460 270200
 Germany: 0800 1808 443

France: 0800 901 383
 USA: +1.760.318.2824

Email: info@iqdfrequencyproducts.com
 Web: www.iqdfrequencyproducts.com