
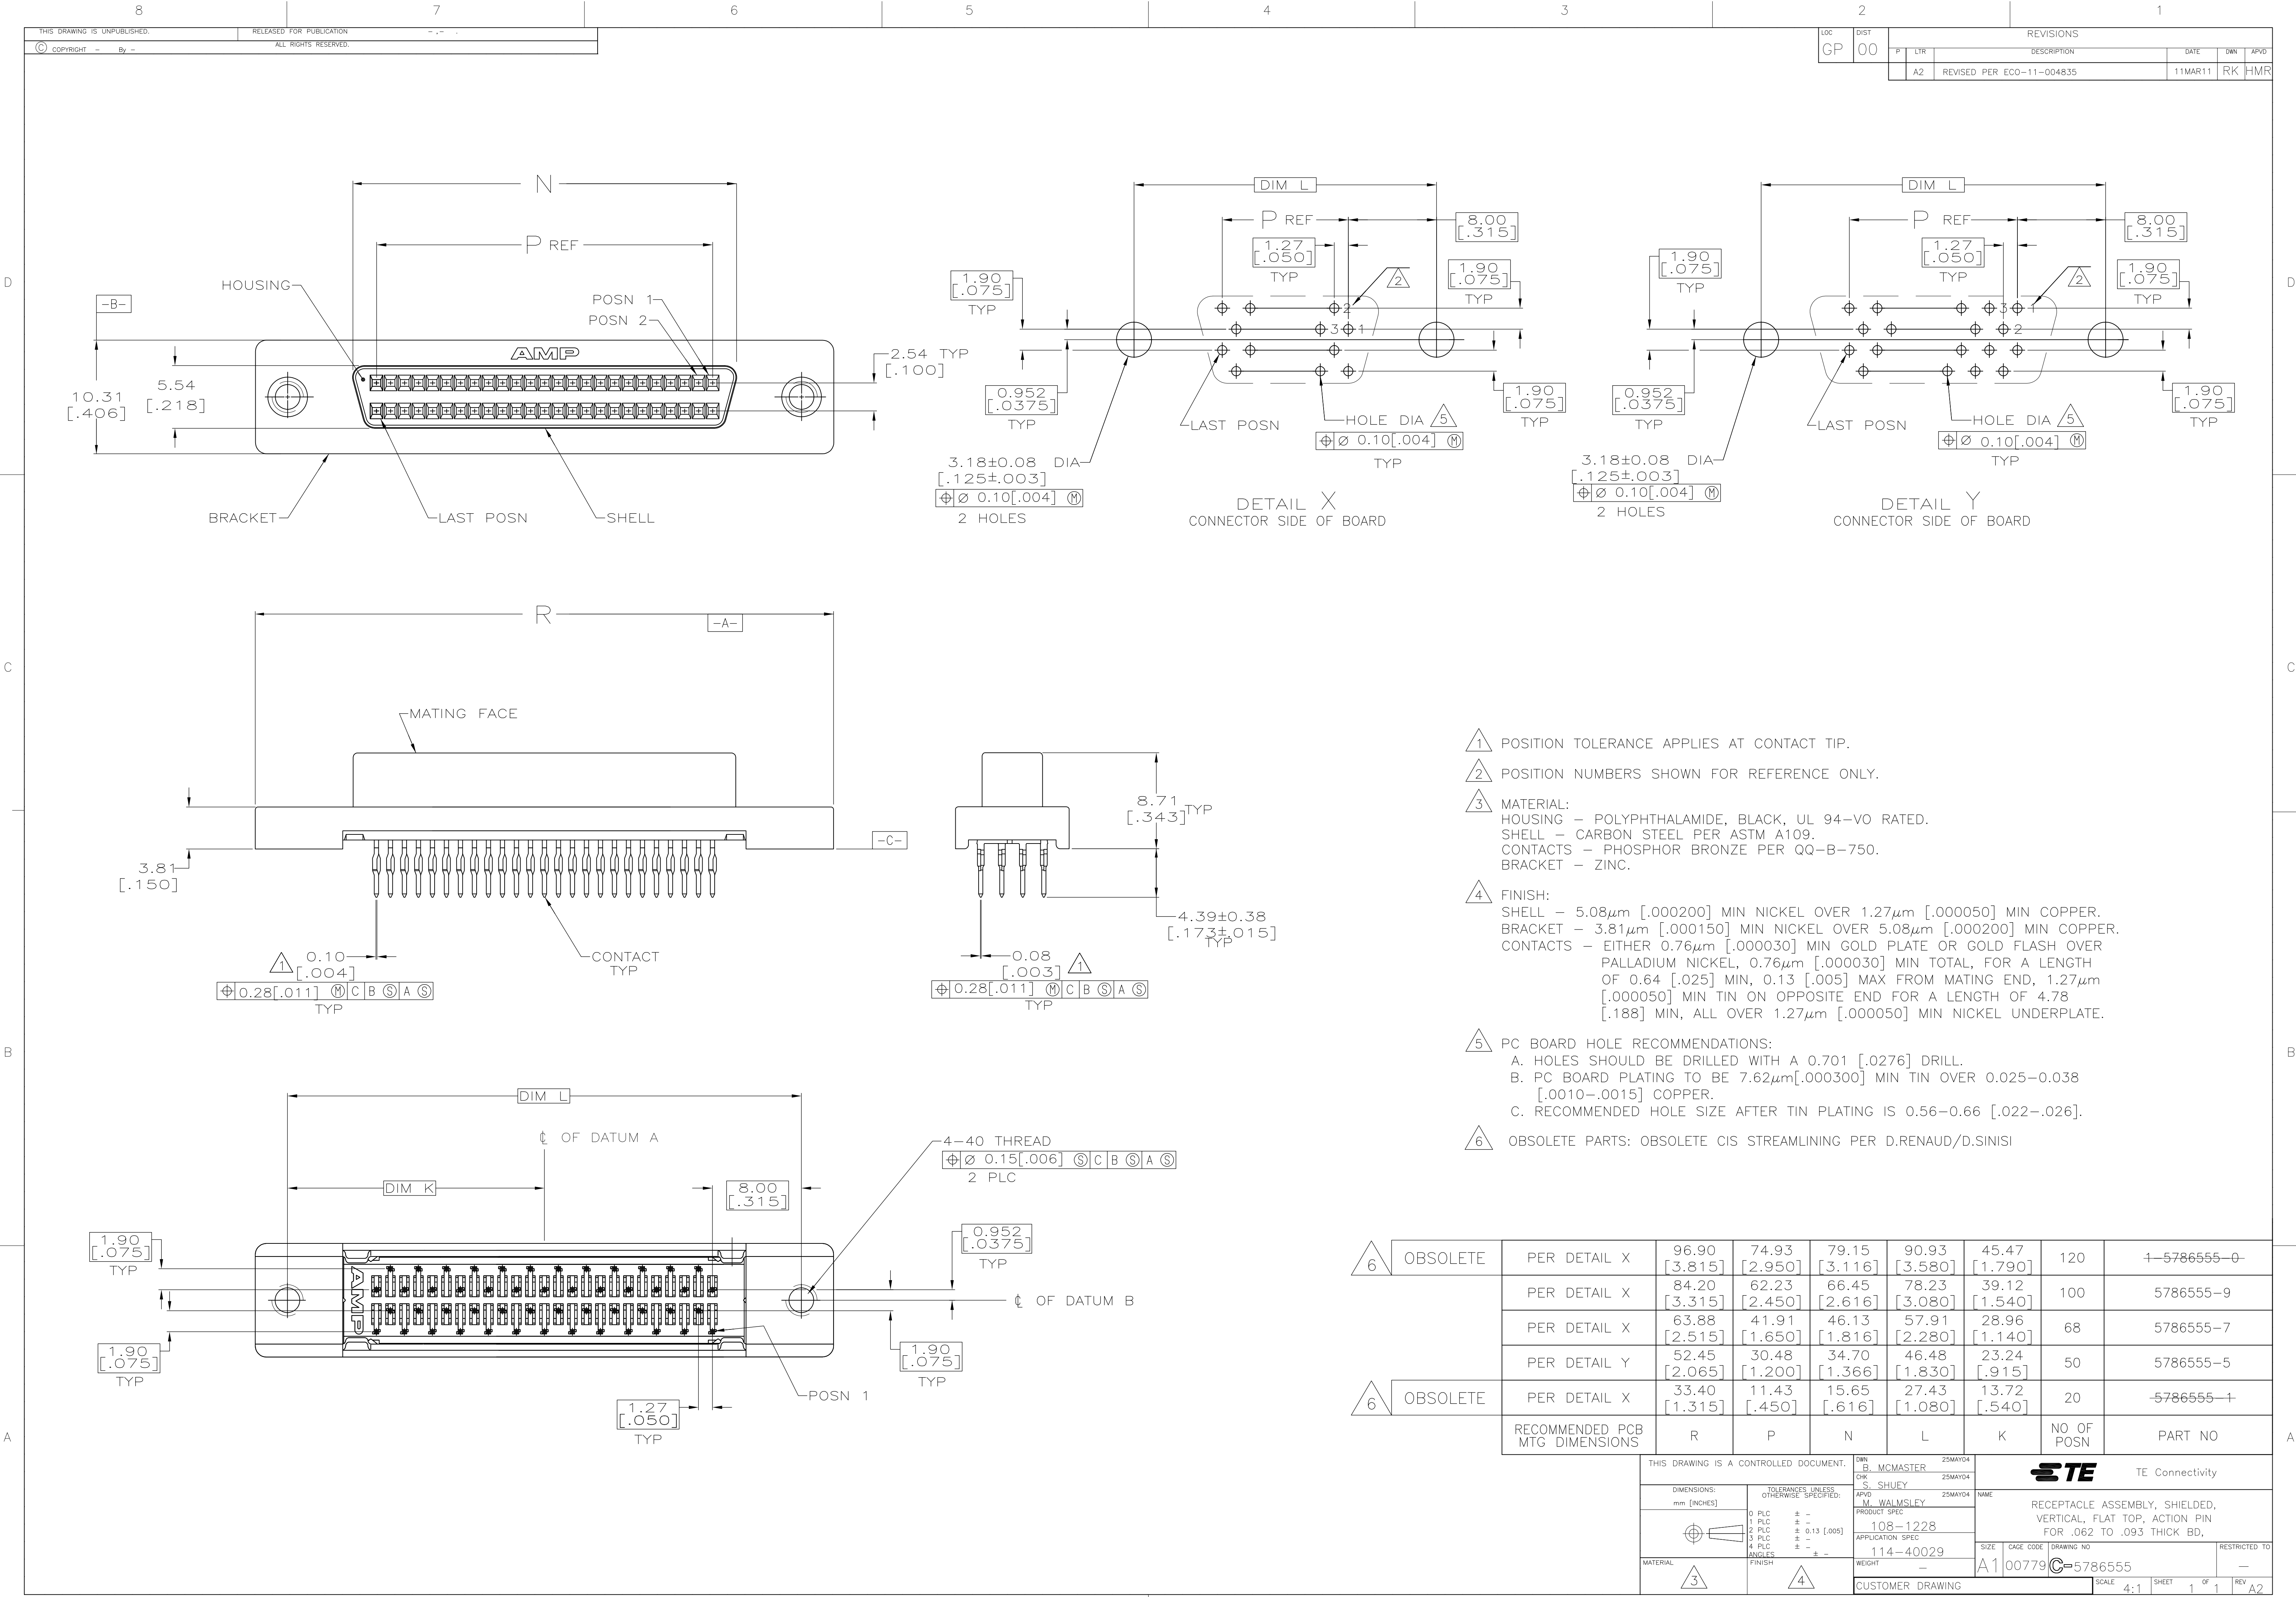




LOC		DIST		REVISONS			
P	LTR	DESCRIPTION			DATE	DWN	APVD
		A2	REVISED	PER ECO-11-004835			

6	OBSOLETE	PER DETAIL X	96.90 [3.815]	74.93 [2.950]	79.15 [3.116]	90.93 [3.580]	45.47 [1.790]	120	4-5786555-0-
		PER DETAIL X	84.20 [3.315]	62.23 [2.450]	66.45 [2.616]	78.23 [3.080]	39.12 [1.540]	100	5786555-9
		PER DETAIL X	63.88 [2.515]	41.91 [1.650]	46.13 [1.816]	57.91 [2.280]	28.96 [1.140]	68	5786555-7
6	OBSOLETE	PER DETAIL Y	52.45 [2.065]	30.48 [1.200]	34.70 [1.366]	46.48 [1.830]	23.24 [.915]	50	5786555-5
		PER DETAIL X	33.40 [1.315]	11.43 [.450]	15.65 [.616]	27.43 [1.080]	13.72 [.540]	20	-5786555-1
		RECOMMENDED PCB MTG DIMENSIONS	R	P	N	L	K	NO OF POSN	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B. MCMASTER	25MAY04	 TE Connectivity			
DIMENSIONS: mm [INCHES]		CHK S. SHUEY	25MAY04				
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD M. WALMSLEY	25MAY04	NAME			
		PRODUCT SPEC		RECEPTACLE ASSEMBLY, SHIELDED, VERTICAL, FLAT TOP, ACTION PIN FOR .062 TO .093 THICK BD.			
		108-1228					
		APPLICATION SPEC					
		114-40029					
MATERIAL		WEIGHT	A1	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
3		—	—	A1	00779	5786555	—
FINISH		CUSTOMER DRAWING		SCALE		SHEET	
4				4:1		1 of 1	
						REV	
						A2	