


Plug Configuration (KMDA Series)

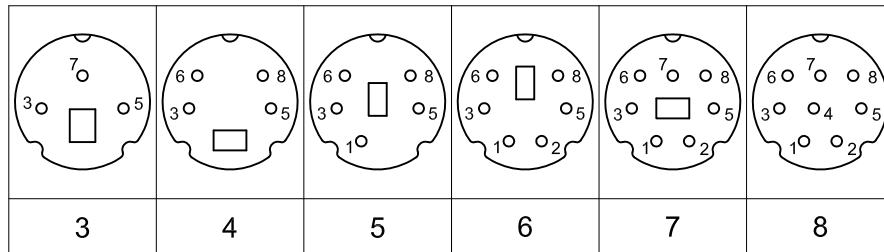

**Materials and Finish**

Insert: Nylon Thermoplastic  
 UL 94V-2 Rated, Black Color  
 Plastic Shell: ABS, UL 94-HB Rated  
 Contact Material: Brass, Silver Plated  
 Shield: Nickel Plated Iron Sheet

**Electrical Characteristics**

Contact Current Rating:  
 2.0A Max. @12V DC and 30°C  
 1.25A Max. @32V DC and 30°C  
 1.0A Max. @32V DC and 45°C

Contact Resistance:  
 Before Durability Test:  
 Pin to Contact: 30 milliohms Max.  
 Plug Shield to Socket: 50 milliohms Max.  
 After Durability Test:  
 Pin to Contact 60 milliohms Max.  
 Plug Shield to Socket: 100 milliohms Max.

Insulation Resistance:  
 50 Megohms Min. at 250V DC

Dielectric Withstanding Voltage:  
 250V AC for 1 Minute

**Mechanical Characteristics**

Insertion Force\*: 0.5kg - 4.5kg  
 Withdrawal Force\*: 0.5kg - 3.0kg  
 Durability: 1500 Mating Cycles  
 Operating Temperature:  
 -25°C to +80°C

\* When used with Kycon KMD and KMDG Series Sockets



Tolerances
X.X ± 0.25
X.XX ± 0.15
Unless Stated
Otherwise

REV.	DATE	DESCRIPTION	REV. BY	CHK. BY	DRAWN BY	DATE
A1	08/11/05	New Drawing	R. Aguirre	H. MA	R. Aguirre	06/28/05
A2	07/15/13	Clean Up Drawing	D. Gih	P. DalCanto		

**KMDAX-xP**  
 x = No. of positions

**Mini-DIN Plug**  
**RoHS Compliant**

