

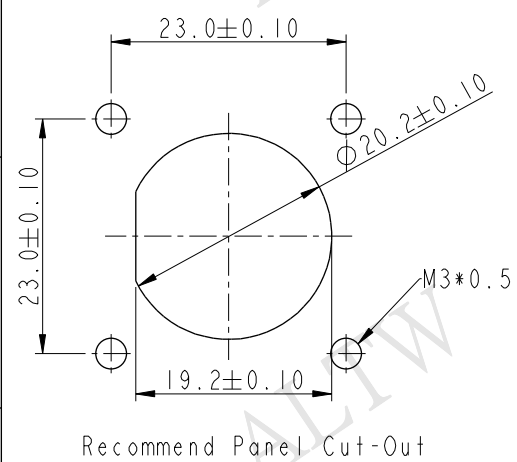

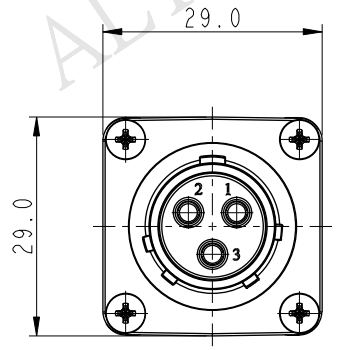
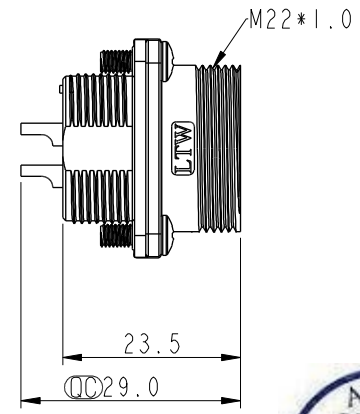

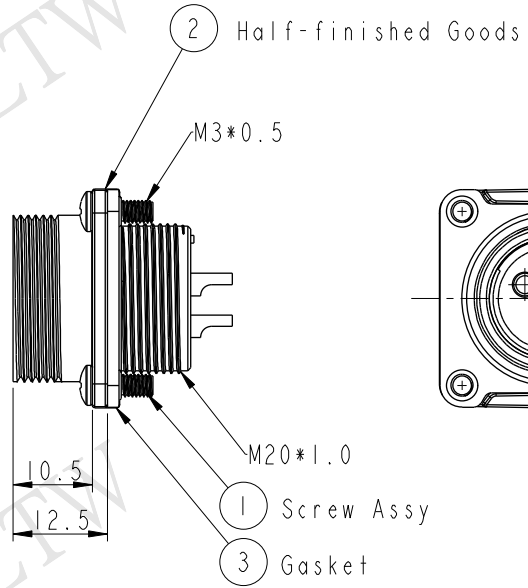


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A	Initial Release	2012/10/22	Ruru	LC20-03PMFS-SS8001 To LC20-03PMFS-SW8001
B	LE31650232	2016/05/04	Vicky	Update Note



Assembly Instruction

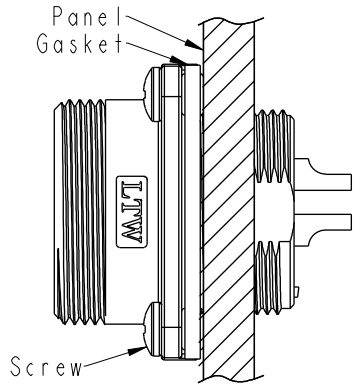

Note:

- * $\varnothing$ Important Dimension.
- * Waterproof Rate: IP68.
IP68: 1M depth of water in 24 Hrs.
(防水等級: IP68)
IP68: 水深一米測試 24 小時
- * Shell: Zinc Alloy#3, Ni Plated, Silver.
- * Insulation: Nylon, Black.
- * Female Pin: Copper Alloy, Silver Plated.
- * Gasket: Silicone, Gray.
- * Screw: Stainless Steel.
- * Recommended Panel Thickness 9mm(Max).

UNIT:mm				TITLE PANEL SCREW 3PIN M CONN F PIN			Amphenol LTW 安費諾亮泰企業股份有限公司			ITEM NO LC20-03PMFS-SW8001		DRAWN BY Vicky		DATE 2016-05-04				
TOLERANCE .X ±0.25 .XX ±0.1 .XXX ±0.05 ANGLES ±1°				SCALE 1:1		SIZE A4				SHEET 1 OF 1		DWG NO LC20-03PMFS-SW8001		CHECKED BY Rita		DATE 2016-05-04		
				REV. B		WC-REV. A.2				QC: Inspection item		CUSTOMER ALTW		APPROVED BY Lisa		DATE 2016-05-04		
1		2		3		4		5		6		7		8 FWW10702-01-02A1				