



**SMA ATTENUATOR**  
**20 DB 2 GHZ 80W**

**R417.820.118**  
Series : **ATTENUATOR**

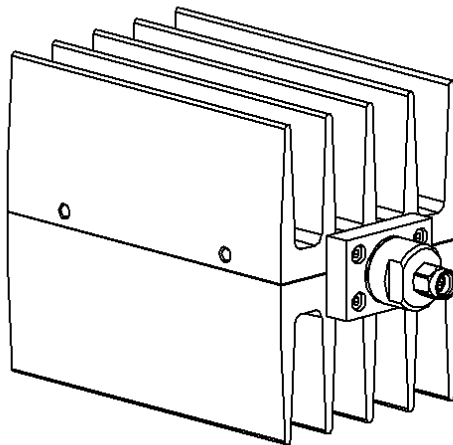

All dimensions are in mm.

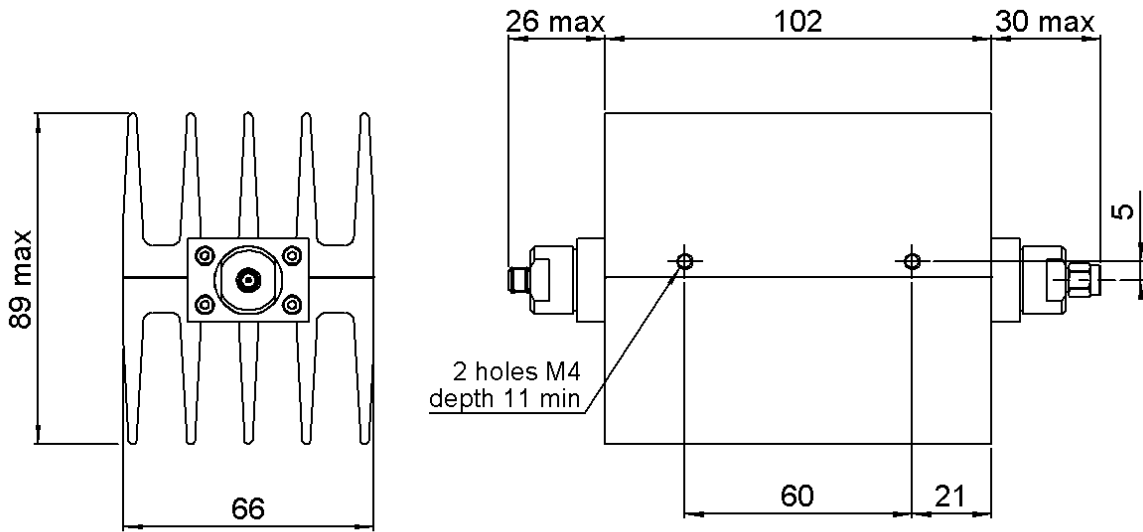

| COMPONENTS            | MATERIALS        | PLATING(μm)           |
|-----------------------|------------------|-----------------------|
| BODY                  | STAINLESS STEEL  | PASSIVATED            |
| MALE CENTER CONTACT   | BERYLLIUM COPPER | GOLD 1.3 OVER NICKEL2 |
| FEMALE CENTER CONTACT | BERYLLIUM COPPER | GOLD 1.3 OVER NICKEL2 |
| OUTER CONTACT         |                  |                       |
| INSULATOR             | PTFE             |                       |
| GASKET                | SILICONE RUBBER  |                       |
| SUBSTRATE             | ALUMINA          |                       |
| RESISTOR              | THICK FILM       |                       |
| OTHERS PARTS          | ALUMINIUM        | BLACK PAINTING        |

Issue : 0843 A

In the effort to improve our products, we reserve the right to make changes judged to be necessary.



**SMA ATTENUATOR**  
**20 DB 2 GHZ 80W**

**R417.820.118**  
Series : ATTENUATOR

**ELECTRICAL CHARACTERISTICS**

|                 |        |       |
|-----------------|--------|-------|
| Frequency (GHz) | DC - 1 | 1 - 2 |
| V.S.W.R (≤)     | 1.10   | 1.25  |
| Deviation(±dB)  | 1.0    | 1.0   |


|                              |        |                       |
|------------------------------|--------|-----------------------|
| Operating Frequency Range    | DC - 2 | GHz                   |
| Impedance                    | 50     | Ω                     |
| Nominal Attenuation          | 20     | dB                    |
| Peak power at 25°C (1μs, 1%) | 5000   | W                     |
| Average power at 25°C        | 80     | W (Free Air Cooled)   |
|                              |        | W (Conduction Cooled) |

**MECHANICAL CHARACTERISTICS**

|            |            |             |             |
|------------|------------|-------------|-------------|
| Connectors | SMA        | Male Female | MIL-C 39012 |
| Weight     | 753,9300 g |             |             |

**ENVIRONMENTAL CHARACTERISTICS**

|                             |              |
|-----------------------------|--------------|
| Operating temperature range | -55 /+125 °C |
| Storage temperature range   | -55 /+125 °C |

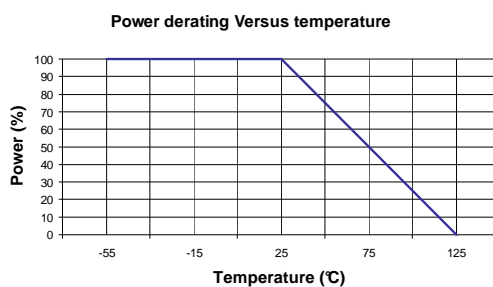

**SPECIFICATION**

**OTHER CHARACTERISTICS**

Issue : 0843 A

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

