
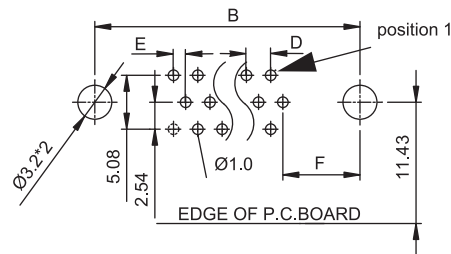


0.64*0.60

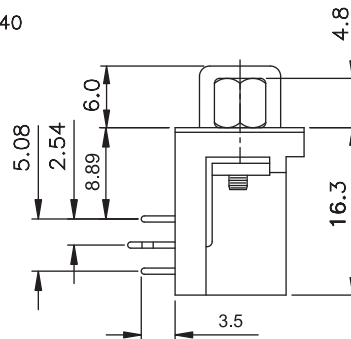

RECOMMENDED P.C.B LAYOUT - COMPONENT VIEW
FITS FOR 1.6MM PCB / TOLERANCES: $\pm 0.05\text{mm}$

TECHNICAL CHARACTERISTICS

MATERIAL
INSULATOR: PBT
FLAMABILITY RATING: UL94-V0
COLOR: BLACK
CONTACT MATERIAL: COPPER ALLOY
CONTACT TYPE: STAMPED
CONTACT PLATING: SELECTIVE GOLD
SHIELDING: STEEL NICKEL PLATED
QUALITY CLASS: 3 AS PER CECC 75 301-802

ENVIRONMENTAL
OPERATING TEMPERATURE: -40 UP TO 85°C
COMPLIANCE: LEAD FREE AND ROHS

ELECTRICAL
CURRENT RATING: 3A AC,DC
WORKING VOLTAGE: 60V AC,DC
INSULATOR RESISTANCE: >5000 MOHM
DIELECTRIC WITHSTANDING VOLTAGE: 1000V AC/MN
CONTACT RESISTANCE: 30 mOHM MAX

SOLDERING: WAVE PROCESS ONLY

PACKAGING
TRAY


ACCESSORIES
UNC 4-40 RIVET / HEX SCREW / BOARD LOCK

DIMENSION

PINS	A	B	C	D	E	F
15	16.3	25.0	30.8	2.29	1.14	7.04
26	24.6	33.3	39.2	2.29	1.14	6.88
44	38.3	47.1	53.1	2.29	1.14	6.88
62	54.8	63.5	69.4	2.41	1.20	7.00

RoHS Compliant

PROJECTION:



GENERAL TOLERANCE

X. = ± 0.5
.X = ± 0.3
.XX = ± 0.2



APPROVAL: RJ

UNIT: MM

SCALE:

SHEET: 1/1

DRAW:

DESCRIPTION: D-SUB FEMALE HIGH DENSITY ANGLED PCB CONNECTOR WITH SCREW

WERI PART NO: 618 0xx 330 923

SIZE

A4