


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-930481	2009/03/04	ZhaoRongFu	Add Waterproof Rate
C	LEN1650671	2016/05/18	Ruru	Change Logo

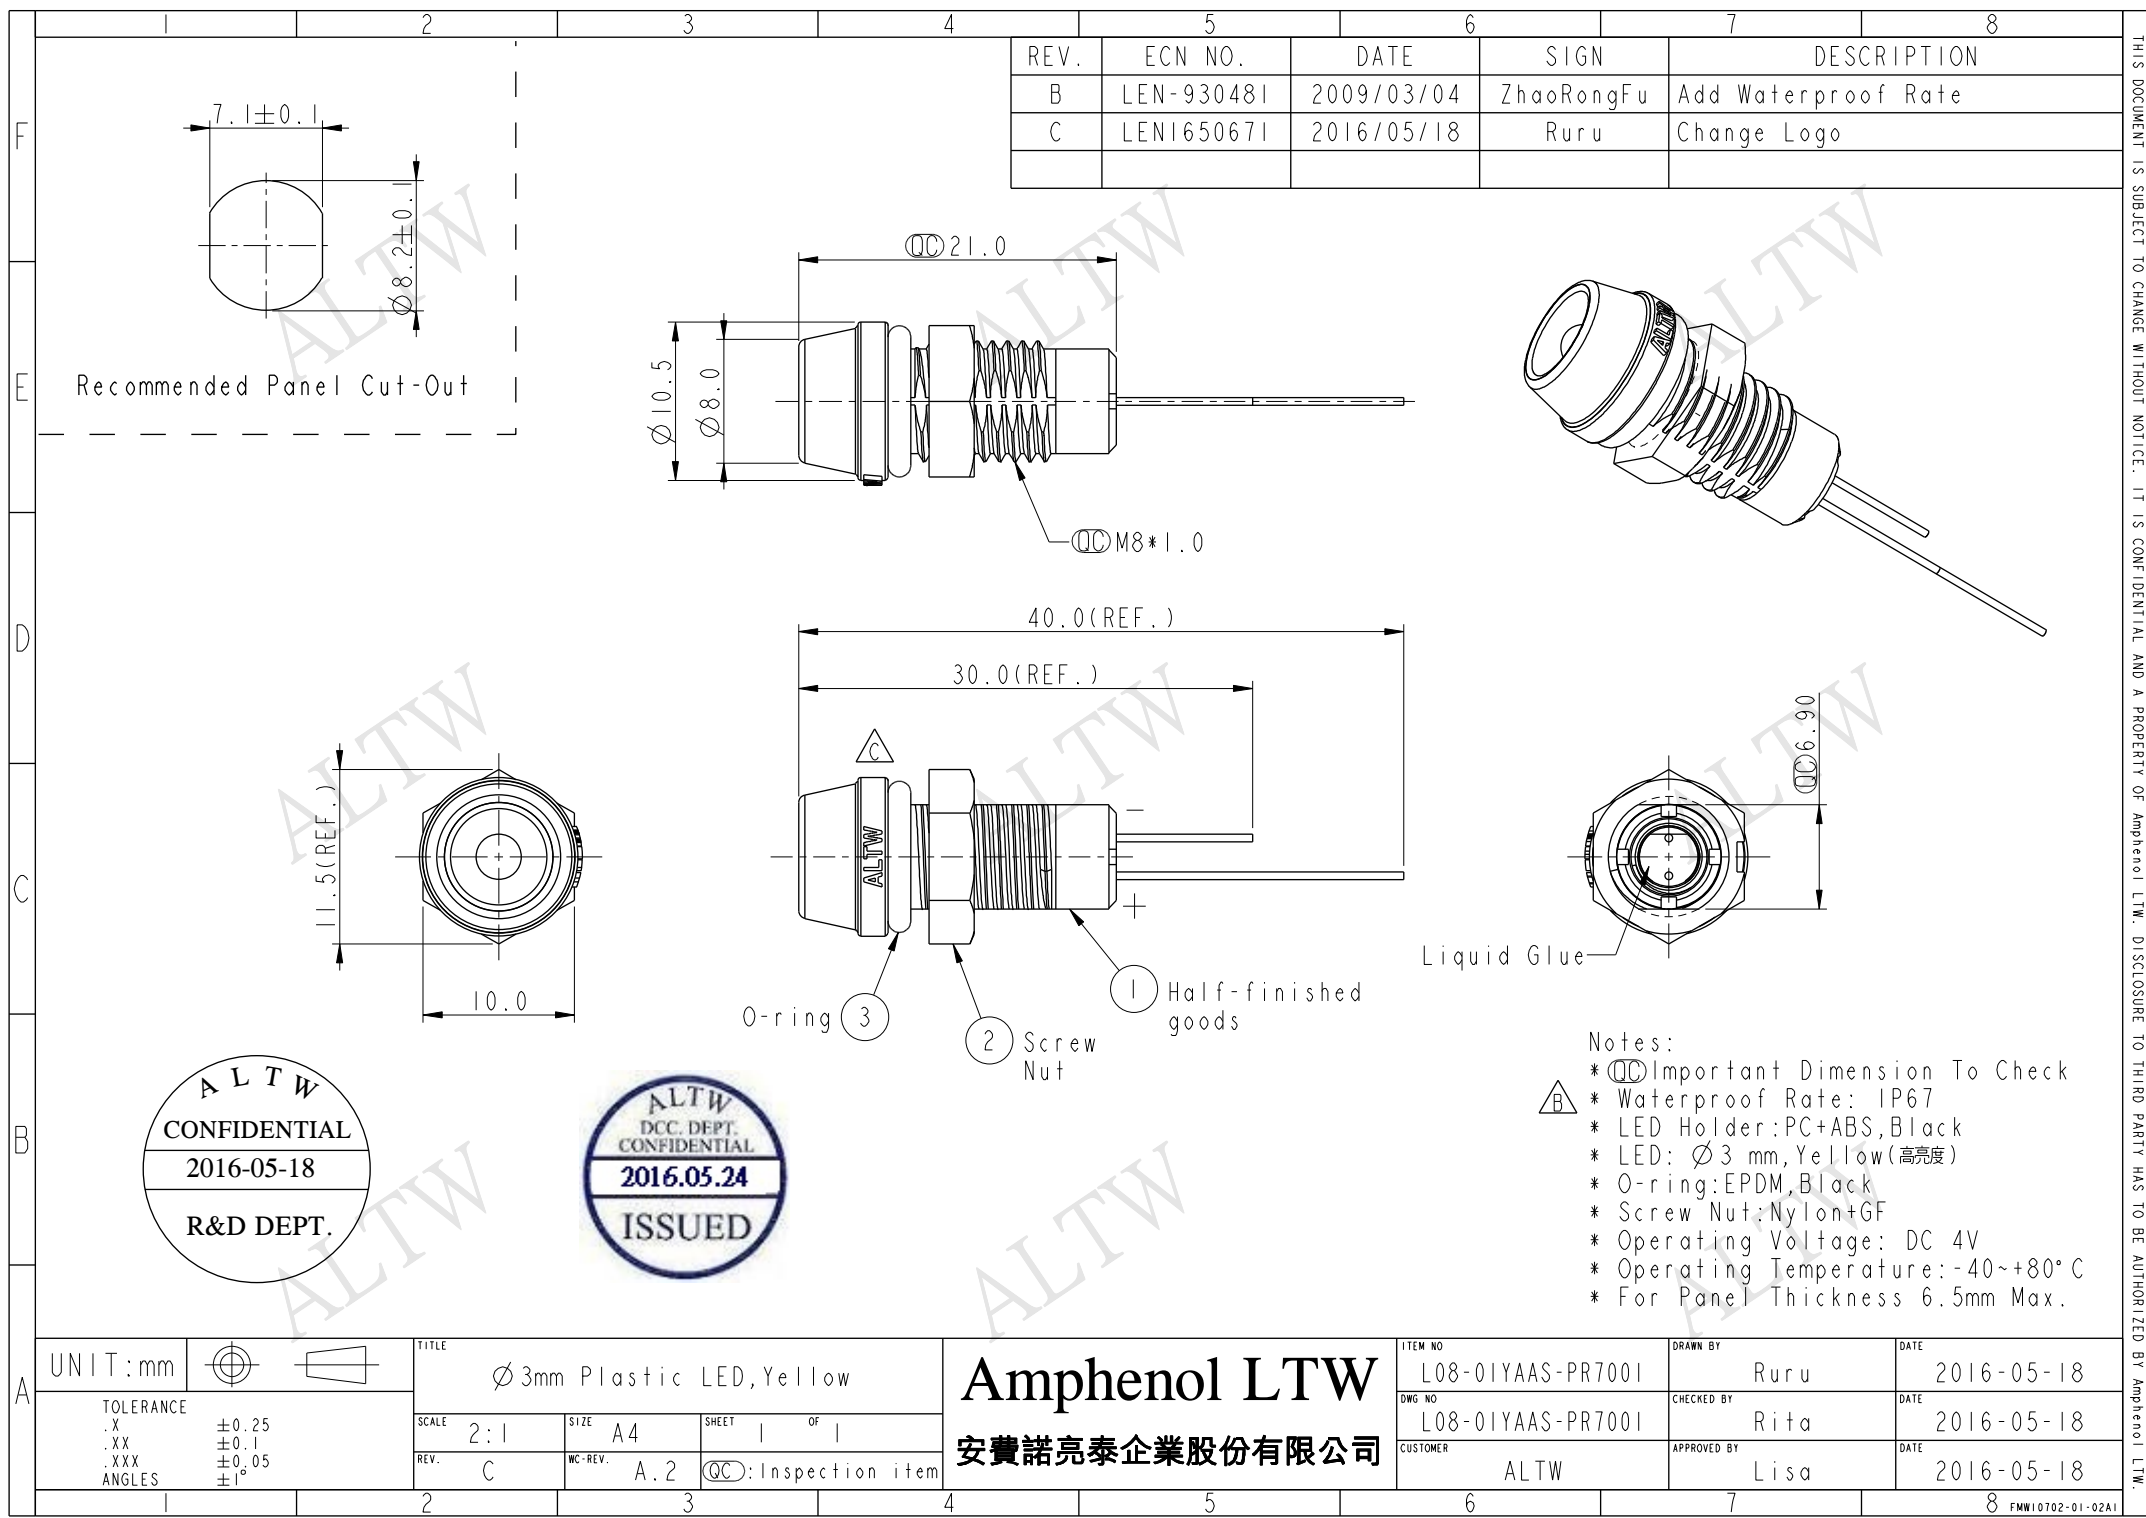

- Notes:
- * $\varnothing$ Important Dimension To Check
 - * Waterproof Rate: IP67
 - * LED Holder: PC+ABS, Black
 - * LED: $\varnothing 3$ mm, Yellow (高亮度)
 - * O-ring: EPDM, Black
 - * Screw Nut: Nylon+GF
 - * Operating Voltage: DC 4V
 - * Operating Temperature: -40~+80°C
 - * For Panel Thickness 6.5mm Max.

ALTW
CONFIDENTIAL
2016-05-18
R&D DEPT.

ALTW
DCC. DEPT.
CONFIDENTIAL
2016.05.24
ISSUED

UNIT: mm		TITLE
TOLERANCE		$\varnothing 3$ mm Plastic LED, Yellow
.X	± 0.25	SCALE
.XX	± 0.1	2:1
.XXX	± 0.05	SIZE
ANGLES	$\pm 1^\circ$	A4
		SHEET
		1 OF 1
		REV.
		C
		WC-REV.
		A.2
		$\varnothing$ Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO.	L08-01YAAS-PR7001	DRAWN BY	Ruru	DATE	2016-05-18
DWG NO.	L08-01YAAS-PR7001	CHECKED BY	Rita	DATE	2016-05-18
CUSTOMER	ALTW	APPROVED BY	Lisa	DATE	2016-05-18