





C-170002

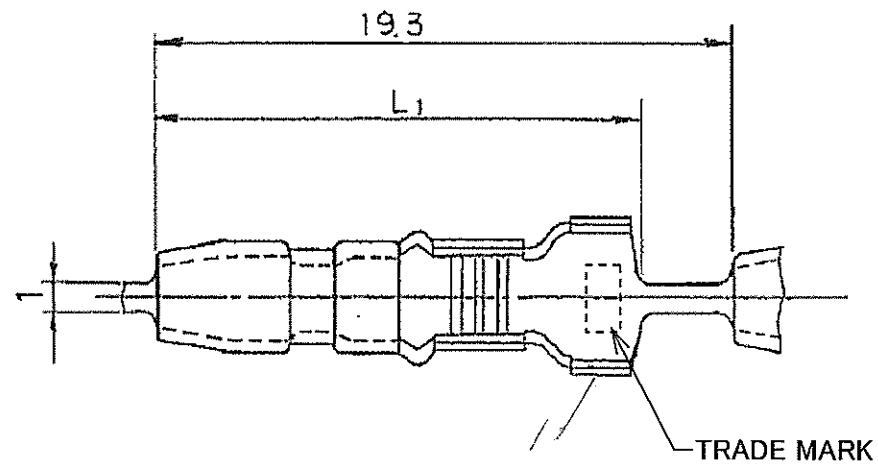

SECT. A-A



SECT. B-B

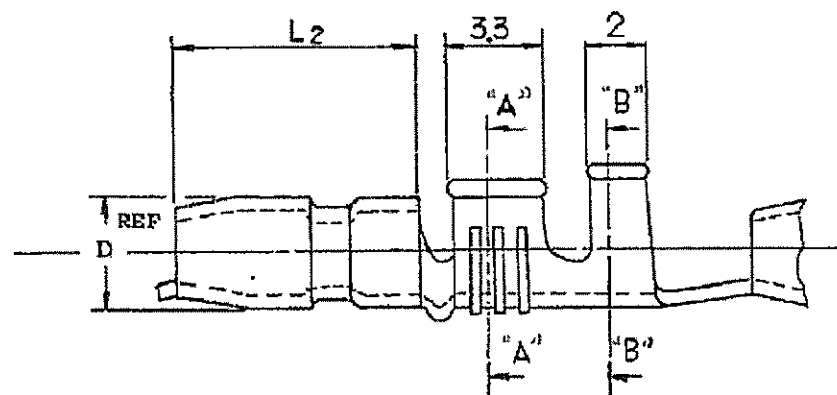

NOTE

- △ THESE ITEMS ARE FOR USE OTHER THAN IN JAPAN.
- ② GENERAL TOLERANCES; ± 0.4
- ③ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

注記

- △ 海外向け製品。
- △ 一般公差; ± 0.4

OBSOLETE	△
OBSOLETE	△
OBSOLETE	△
OBSOLETE	△

170002-8	---	17.0	8.7	4.0	7000	108-5003	BRASS	PRE-TIN
3-1700024	---	17.0	8.7	4.0	15000	108-5003	PHOS-BZ	POST-TIN
3-3	---	17.0	8.7	4.0	15000	-5003		
3-2	---	15.8	7.3	3.5	15000	-5004		POST-TIN
3-1	---	15.8	7.3	3.5	15000	-5004	PHOS-BZ	
2-5	---	17.0	8.7	4.0	20000	-5003	BRASS	
1-7	---	15.8	7.3	3.5	25000	-5004		
1-6	---	17.0	8.7	4.0	25000	-5003		
1-5	---	17.0	8.7	4.0	25000	-5003		
1-4	---	17.0	8.7	4.0	20000	-5003		POST-TIN
1-2	---	15.8	7.3	3.5	20000	-5004		POST-TIN
1-1	---	15.8	7.3	3.5	20000	-5004		
7-1	△	17.0	8.7	4.0	7000	-5004		
5-3	---	17.0	8.7	4.0	5000	-5003		
4-2	---	17.0	8.7	4.0	7000	-5003		POST-TIN
170002-2	170020-1	15.8	7.3	3.5	7000	108-5004	BRASS	POST-TIN
PART NO.	LOOSE PCS NO	L1 DIM	L2 DIM	B DIM	QTY/REEL	PROD SPEC NO.	MATERIAL	FINISH

TE TE Connectivity

WIRE RANGE

25-27 AWG (AWG) 20-14

MATERIAL

SEE TABLE

DR. H. R. 11/185

CHK. H. R. 11/185

INSULATION DIA.

2.5-3.8 mm

FINISH

SEE TABLE

APP. H. R. 11/185

APP. H. R. 11/185

NAME

シエア プラグ

SHUR PLUG

SIZE

C J

REV. R2

LOC

C J

SCALE

REV. R2

SHEET 1-1

SHEET 1-1

R2	REVISED PER ECO-11-005030	RK	HMR	22MAR11
LTR	REVISION RECORD	DR	CHK	DATE

書

(CUSTOMER DRAWING) 参考図面

単位: 1L DIMENSIONS IN MM. DO NOT SCALE PRINT

PRINT DIST