

PB-Series

GFCI/ELCI & Panel Seal

The PB-Series utilizes the hydraulic magnetic principle which provides precise operation and performance even when exposed to extremely hot and/or cold application environments.

The new PB-Series, AC Residual Current Circuit Breaker with Overcurrent Protection (RCBO), combines the ground fault protection of a GFCI with the familiar overcurrent tripping characteristics of a normal circuit breaker.

These precision mechanisms are temperature stable and are not adversely affected by temperature changes in their operating environment. As such, derating considerations due to temperature variations are not normally required, and heat-induced nuisance tripping is avoided.

Features:

- ♦ Overload, short circuit and ground fault protection in a single package
- ♦ Handle or rocker style actuators
- ♦ Wiping Contacts - Mechanical linkage with two-step actuation – cleans contacts, provides high, positive contact pressure & longer contact life.
- ♦ A trip-free mechanism, a safety feature which makes it impossible to manually hold the contacts closed during overload or fault conditions.
- ♦ A common trip linkage between all poles, another safety feature, ensures that an overload in one pole will trip all adjacent poles.
- ♦ Front panel mounting
- ♦ Integral push-to-test button



Benefits:

- ♦ Increases safety around boats and marinas
- ♦ Protects against electrical shock hazards in areas near water
- ♦ Protects against defects in wires & conductors
- ♦ Reduces fire and shock hazards from defects in permanently installed appliances such as water heaters, battery chargers, lighting fixtures, etc.
- ♦ Detects lower level ground faults which do not trip ordinary circuit breakers, but can lead to fires, and shock hazards for boating occupants



Carling Technologies™

Innovative Designs. Powerful Solutions.

Electrical Tables

Table A: UL Listed configurations and performance capabilities as Circuit Breakers.

PB-SERIES TABLE A					
CIRCUIT CONFIGURATION	VOLTAGE			CURRENT RATING (AMPS)	INTERRUPTING CAPACITY (AMPS)
	MAX RATING VOLTS	FREQUENCY HERTZ	PHASE		
SERIES	120	60	1	.10-30	5000

Electrical

Maximum Voltage
Current Ratings

120/240VAC 60 Hz
Standard current coils: 0.100, 0.250, 0.500, 0.750, 1.00, 2.50, 5.00, 7.50, 10.0, 15.0, 20.0, 25.0 & 30.0 amps. Other ratings available, see ordering scheme.
Minimum of 100 Megohms at 500 VDC.


Insulation Resistance

Dielectric Strength

UL, CUL - 1500 V 60 Hz for one minute between all electrically isolated terminals. PB-Series circuit breakers comply with the 8mm spacing and 3750V 60 Hz dielectric requirements from hazardous voltage to operator accessible surfaces and between adjacent poles

Impedance


Values from Line to Load Terminal.

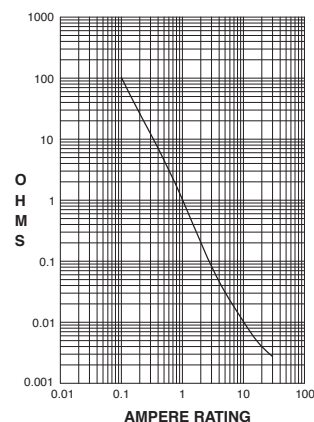

Ampere Rating

CURRENT (AMPS)	TOLERANCE (%)
0.100 - 5.0	± 15%
5.1 - 20.0	± 25%
20.1 - 30.0	± 35%

Pulse Tolerance Curve



Leakage To Ground

Standard Must Trip
Leakage Current Ratings

120/240VAC 60 Hz
5 & 30 milliamps. 5± 1mA for UL943, other leakage ratings test to UL1053.

Trip Time

For other ratings, consult factory.
300 ms Max. @ 100%, 40ms Max. @ 500% of must trip leakage current.

Test Button

On unit face along side of actuator.

*Manufacturer reserves the right to change product specification without prior notice.

Mechanical

Endurance

10,000 ON-OFF operations @ 6 per minute; with rated Current & Voltage. All PB-Series Circuit Breakers will trip on overload or ground fault, even when Handle is forcibly held in the ON position.

Trip Free

Trip Indication

The operating Handle moves positively to the OFF position when an overload or ground fault causes the breaker to trip.

Physical

Number of Poles

1 - 3 poles, where the third pole is neutral

Internal Circuit Config.

Series Trip

Weight

Approximately 65 grams/pole. (2.32 ounces/pole.)

Standard Colors

Housing- Black; Actuator - See Ordering Scheme.

Environmental

Designed and tested in accordance with requirements of specification MIL-PRF- 55629 and MIL-STD-202 as follows:

Shock

Withstands 100 Gs, 6ms, sawtooth while carrying rated current per Method 213, Test Condition "I". Ultra-short curves tested @ 90% of rated current.

Vibration

Withstands 0.060" excursion from 10-55 Hz, and 10 Gs 55-500 Hz, at rated current per Method 204C, Test Condition A. Instantaneous and ultrashort curves tested at 90% of rated current.

Moisture Resistance

Method 106D, i.e., ten 24-hour cycles @ + 25°C to +65°C, 80-98% RH.

Salt Spray

Method 101, Condition A (90-95% RH @ 5% NaCl Solution, 96 hrs).

Thermal Shock

Method 107D, Condition A (Five cycles @ -55°C to +25°C to +85°C to +25°C).

Operating Temperature

-35° C to +65° C

Corrosion

Tested per UL943 FMG Test. 3 weeks @ 30°C 75% RH, 100ppb H₂S, 20ppb Cl₂, 200ppb NO₂

Agency Certifications

UL Listed

UL Standard 489

Circuit Breakers, Molded Case, (Guide DIVQ, File E129899)

UL Standard 1077

Supplementary Protectors

UL Standard 943

Class A Ground Fault Circuit

UL Standard 1053

Interrupters

Ground Fault Sensing and Relaying Equipment

PB	A	-	B	A	-	24	-	620	-	2	B	A	-	A	G
1 Series	2 System Voltage/Poles		3 Circuit	4 Actuator		5 Frequency & Delay		6 Current Rating		7 Terminal	8 Actuator Color	9 Mounting/ Barriers		10 Trip Level	11 Agency Approval

1 SERIES PB

2 SYSTEM VOLTAGE / POLES

- A** 120 VAC single phase, one pole
B 120/240 VAC single phase, two pole
C 120/240 VAC single phase with switched neutral, three pole
D 120 VAC two pole with switched neutral

3 CIRCUIT

- B** Series Trip (Current)

4 ACTUATOR¹

Handle

- A** one per pole
B one per multipole unit

Two Color Curved Visi-Rocker

- C** Indicate ON, vertical legend
D Indicate ON, horizontal legend
F Indicate OFF, vertical legend
G Indicate OFF, horizontal legend

Single Color Curved Rocker







- J** Vertical legend
K Horizontal legend

Two Color Flat Visi-Rocker

- 1** Indicate OFF, vertical legend
2 Indicate OFF, horizontal legend

Single Color Flat Rocker

- 3** Vertical legend
4 Horizontal legend

ROCKER STYLE DESCRIPTIONS					
INDICATE "ON"	INDICATE "OFF"	SINGLE COLOR	INDICATE "ON"	INDICATE "OFF"	SINGLE COLOR
					
					

5 FREQUENCY & DELAY

- 22** 60Hz Short
24 60Hz Medium
26 60Hz Long

6 CURRENT RATING (AMPERES)

CODE	AMPERES				
210	0.100	285	0.850	450	5.000
215	0.150	290	0.900	455	5.500
220	0.200	295	0.950	460	6.000
225	0.250	410	1.000	465	6.500
230	0.300	512	1.250	470	7.000
235	0.350	415	1.500	475	7.500
240	0.400	517	1.750	480	8.000
245	0.450	420	2.000	485	8.500
250	0.500	522	2.250	490	9.000
255	0.550	425	2.500	495	9.500
260	0.600	527	2.750	610	10.000
265	0.650	430	3.000	710	10.500
270	0.700	435	3.500	611	11.000
275	0.750	440	4.000	711	11.500
280	0.800	445	4.500	612	12.000
				712	12.500
				613	13.000
				614	14.000
				615	15.000
				616	16.000
				617	17.000
				618	18.000
				620	20.000
				622	22.000
				624	24.000
				625	25.000
				630	30.000

7 TERMINAL²

- 1³** Push-On 0.250 Tab (Q.C.)
2 Screw 8-32 w/upturned lugs
3 Screw 8-32 (Bus Type)
4 Screw 10-32 w/upturned lugs
5 Screw 10-32 (Bus Type)
- B** Screw M5 w/upturned lugs
C Screw M4 w/upturned lugs
E Screw M4 (Bus Type)
H Screw M5 (Bus Type)

8 ACTUATOR COLOR & LEGEND

Handle	I-O	ON-OFF	Dual	Rocker Actuator Color	Visi-Rocker
White	A	B	1	Black	White
Black	C	D	2	White	N/A
Red	F	G	3	White	Red
Green	H	J	4	White	Green
Blue	K	L	5	White	Blue
Yellow	M	N	6	Black	Yellow
Gray	P	Q	7	Black	Gray
Orange	R	S	8	Black	Orange

9 MOUNTING/BARRIERS

- MOUNTING STYLE**
Threaded Insert, 2 per pole
A 6-32 X 0.195 inches
B ISO M3 x 5mm
- BARRIERS**
yes
yes

10 LEAKAGE CURRENT TRIP LEVEL - MAX. TRIP CURRENT


- A** 5 MA (CLASS A GFCI)^{3,4,5}
E 30 MA (ELCI)

11 AGENCY APPROVAL



- G** UL489 Listed, CSA Certified
C UL1077
I UL1077/UL1500 Ignition Protected, CSA Certified⁶

Notes:


- Actuator Code:
A: Handle tie pin spacer(s) and retainers provided unassembled with multi-pole units.
B: Handle location as viewed from front of breaker:
2 pole - left pole 3 pole - center pole
- Screw Terminals are recommended on ratings greater than 20 amps.
- Available with leakage current trip level - Max trip current code E, and agency approval C.
- 6mA per UL943, available with agency approval code G.
- 30mA per UL1053, available with agency approval codes C & G.
- UL1500 only available with 30MA trip level.

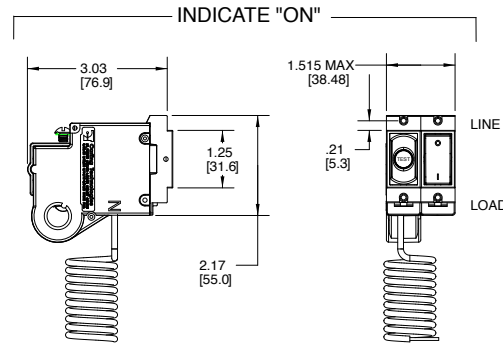


1-POLE 120 VAC VERSION

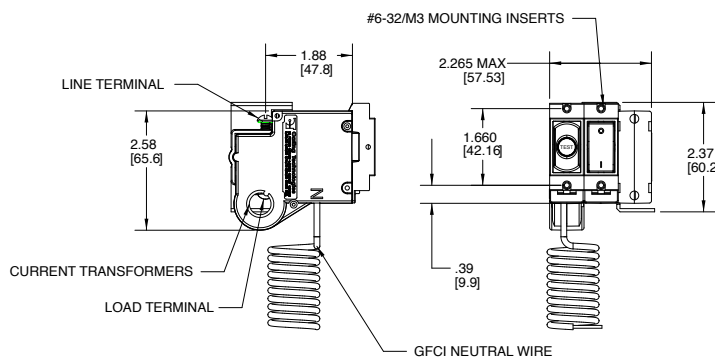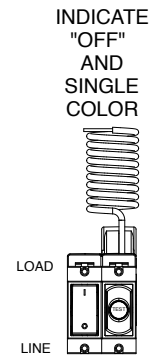

2-POLE 120/240 VAC VERSION

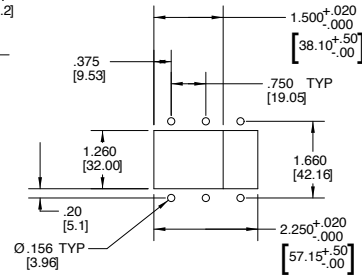


PANEL CUTOUT

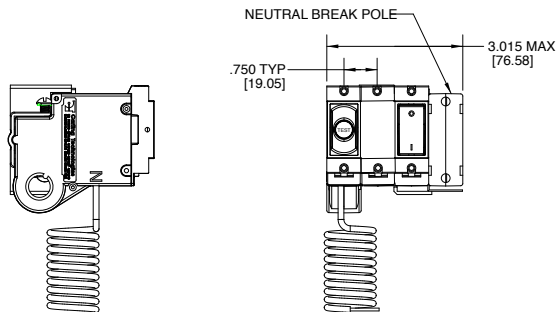

2-POLE 120/240 VAC WITH NEUTRAL BREAK

TERMINAL DIMENSIONAL DETAIL & RATING

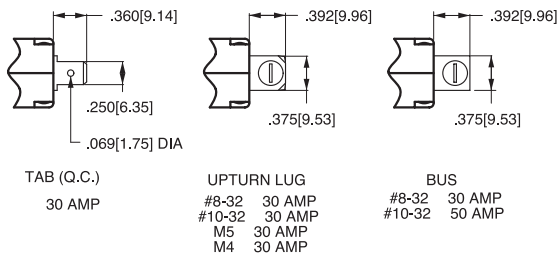


Notes:

- 1 All dimensions are in inches [millimeters].
- 2 Tolerance ± 0.020 [.51] unless otherwise specified.


TABLE A TIGHTENING TORQUE SPECIFICATIONS

THREAD SIZE	TORQUE
#6-32 & M3 MOUNTING HARDWARE	7-9 IN-LBS [0.8-1.0 NM]
#8-32 & M4 THREAD TERMINAL SCREW	12-15 IN-LBS [1.4-1.7 NM]
#10-32 & M5 THREAD TERMINAL SCREW	15-20 IN-LBS [1.7-2.3 NM]



TYPICAL 1-POLE 120 VAC VERSION

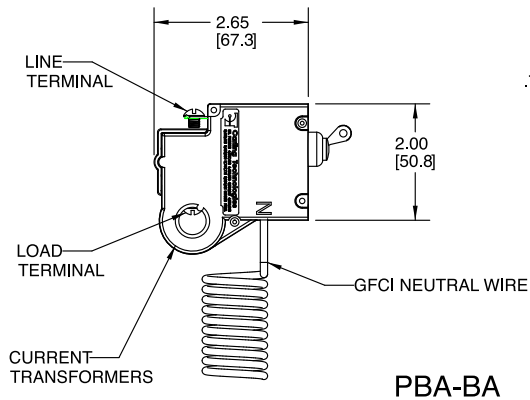

TYPICAL 2-POLE 120/240VAC WITH NEUTRAL BREAK VERSION

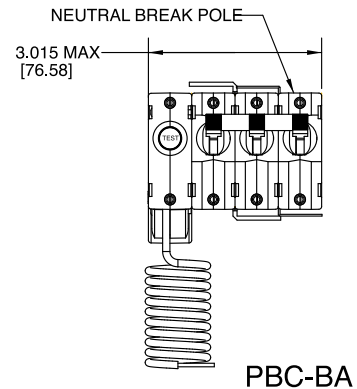


TYPICAL 2-POLE 120/240 VAC VERSION

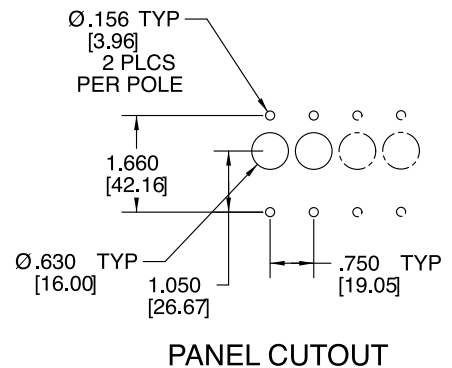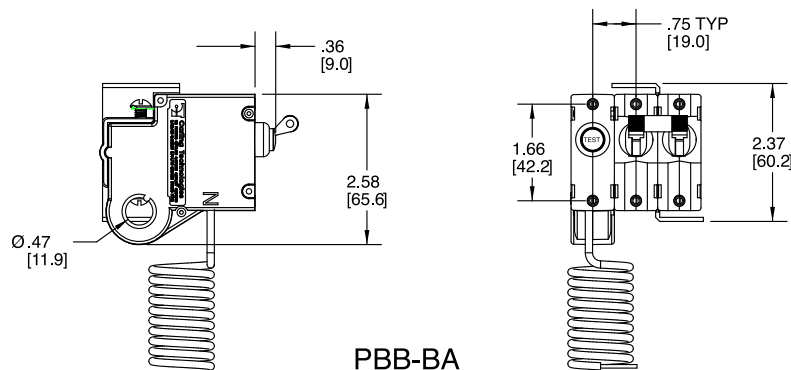


Notes:

- 1 All dimensions are in inches [millimeters].
- 2 Tolerance ± 0.020 [.51] unless otherwise specified.


120VAC with Switched Neutral

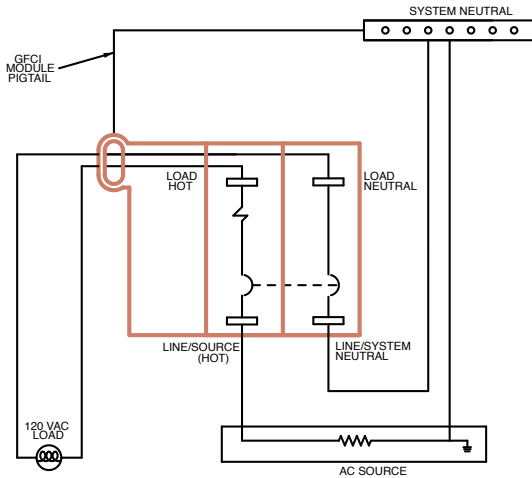


120VAC without Switched Neutral

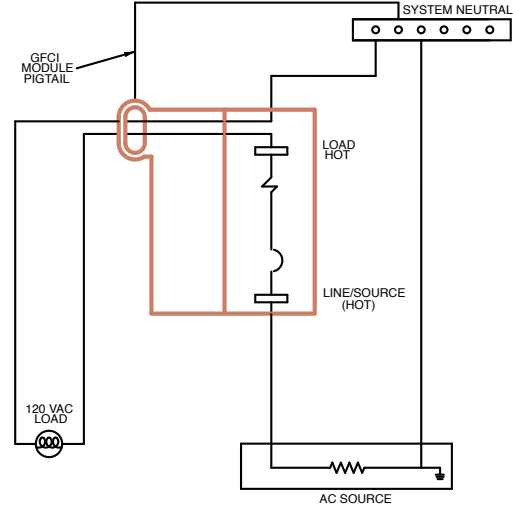

120/240VAC with Switched Neutral

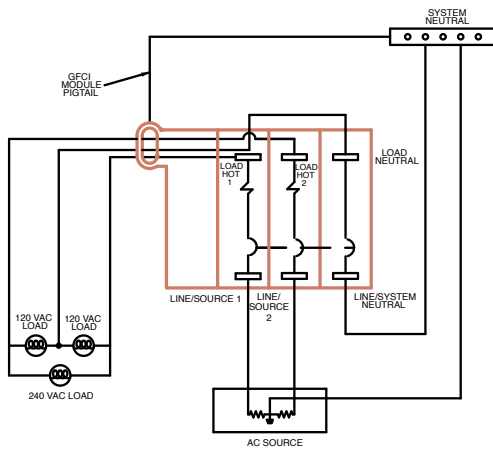

120/240VAC without Switched Neutral

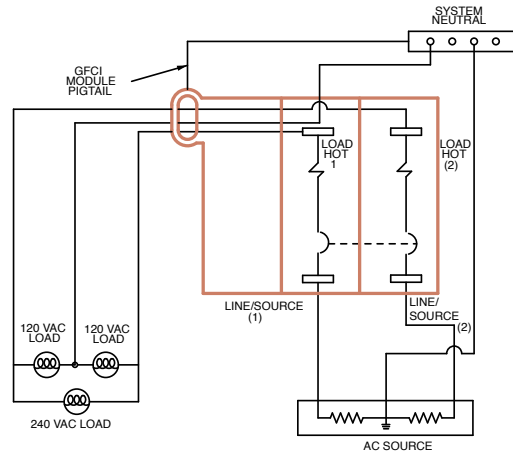

8	PB	-	1	4	1
1 Type Number	2 Series		3 Actuator	4 Poles	5 Mounting

1 TYPE NUMBER

8 Circuit Breaker Assembly

2 SERIES

PB

3 ACTUATOR TYPE

- 1 Handle, one per pole
 2 Handle, one per multipole unit
 A Rocker²

4 POLES PER UNIT - INCLUDING ELECTRONIC MODULE



- 2 Two
 3 Three
 4 Four

5 MOUNTING SCREWS / PLATE MATERIAL¹


- 1 6-32 Thread Phillips Head
 2 M-3 Thread Phillips Head
 3 6-32 Thread Slotted Head
 4 M-3 Thread Slotted Head
 5 6-32 Thread Phillips Head w/ Stainless Steel Plate
 6 M-3 Thread Phillips Head w/ Stainless Steel Plate
 7 6-32 Thread Slotted Head w/ Stainless Steel Plate
 8 M-3 Thread Slotted Head w/ Stainless Steel Plate

Notes:


- 1 Screws supplied to accommodate mounting panel thickness of 1/8" ± 1/32".
 Consult Factory for additional options
 2 Available for Flat and Curved Rocker options - No Rockerguard Bracket

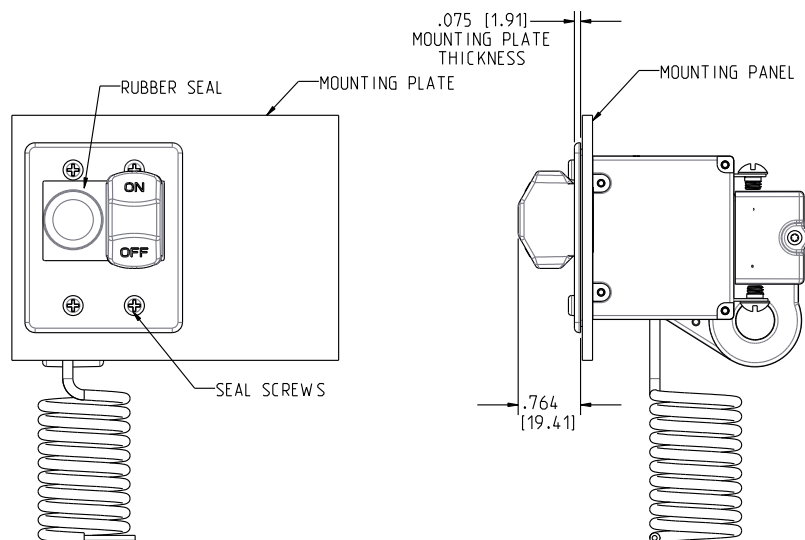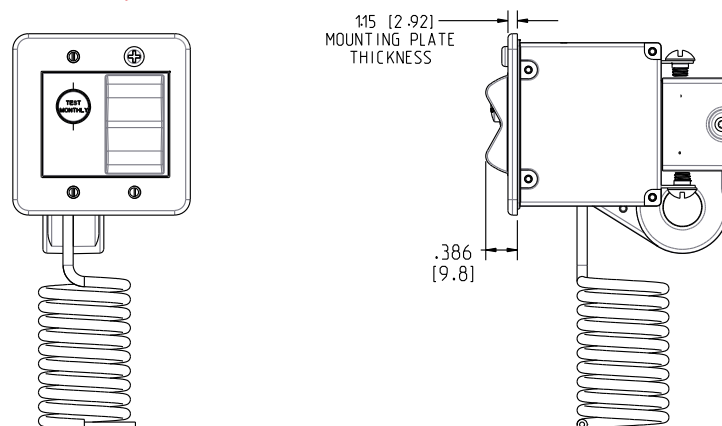Handle Style Panel Seal**Rocker Style Panel Seal**

Handle Actuator

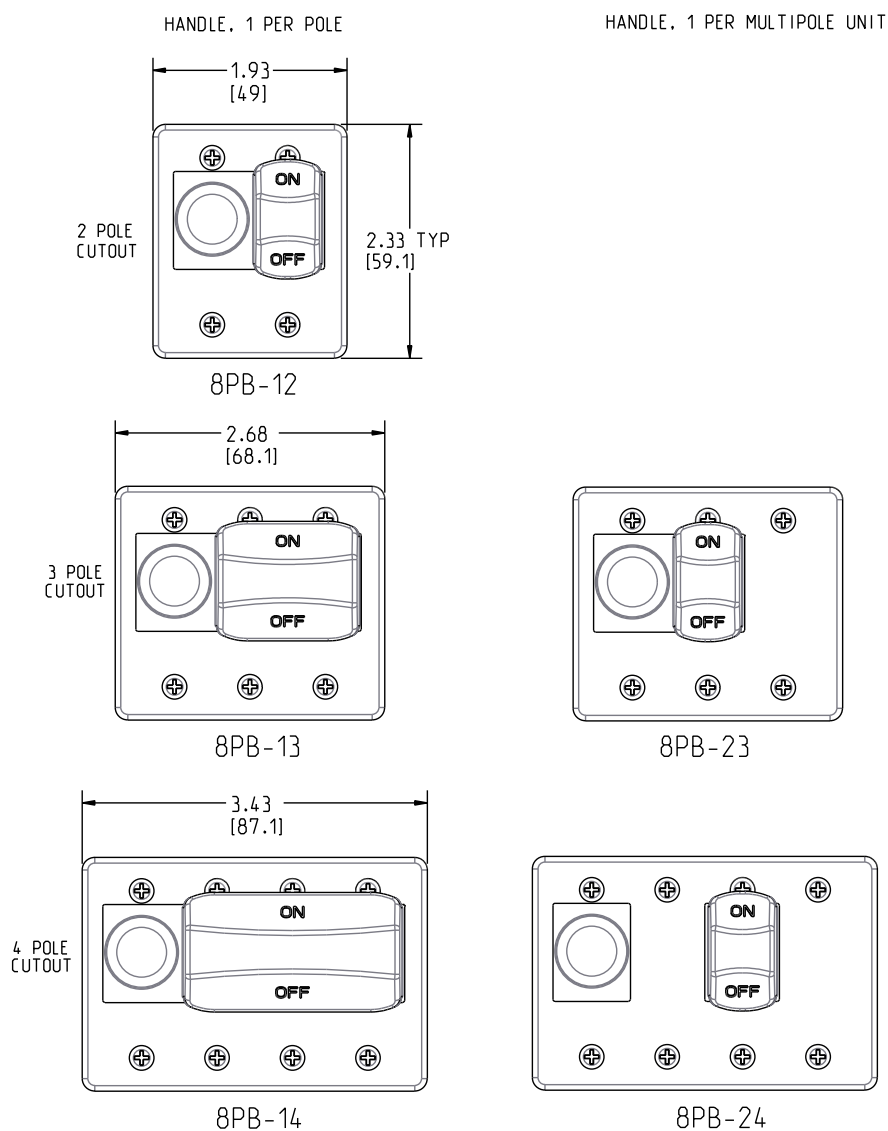


Rocker Actuator

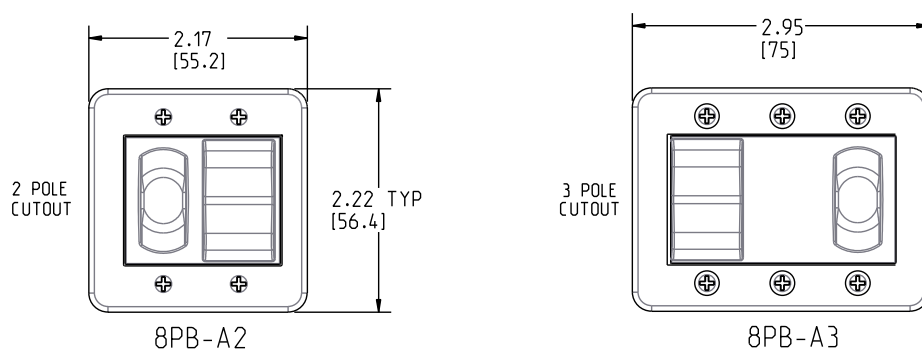


Time Delay Curves


Instantaneous

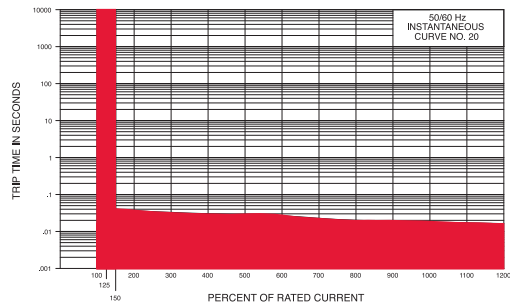


Medium

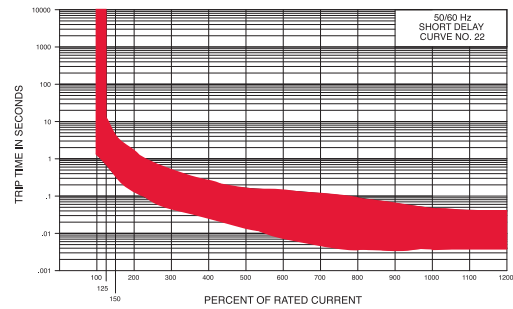

Short

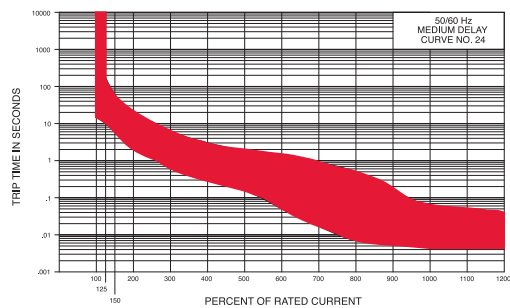

Long

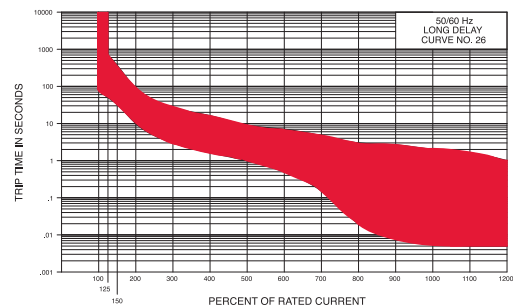

REV_GFCI_PB_09_2013