


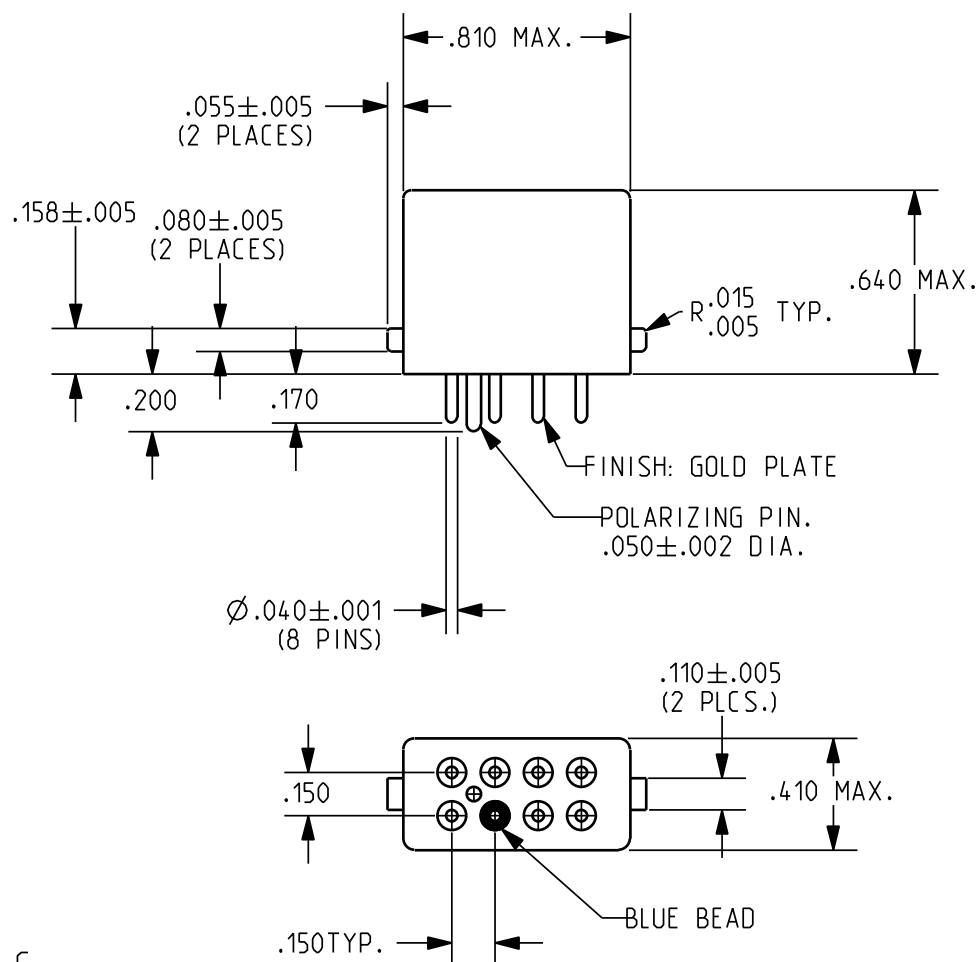

REV. C

DCO 300783

TOLERANCES $\pm .010"$ - UNLESS OTHERWISE SPECIFIED

COIL: @ 25°C

RESISTANCE $500 \text{ OHMS} \pm 10\%$

NOMINAL VOLTAGE 28 VDC

MUST OPERATE 13.5 VDC MAX.

TRANSIENT SUPPRESSION - 42 VDC MAX.

MUST RELEASE $5.5 \text{ VDC MAX., } 2.3 \text{ VDC MIN.}$

ENVIRONMENT:

VIBRATION 70 Hz TO 3000 Hz @ 30 g's

SHOCK 200 g's 6 MS. DURATION


TEMPERATURE -70°C TO $+125^{\circ}\text{C}$

NOTES: OPERATE, RELEASE 5 MS MAX.

CONTACT BOUNCE 1 MS MAX.

CONTACT BREAK BOUNCE 0.1 MS MAX.

CUSTOMER DATA SHEET

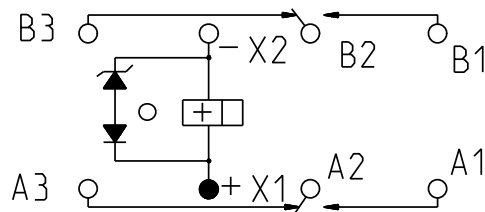

TERMINAL VIEW

CONTACT RATING: LOW LEVEL
TO $5 \text{ AMPS } 28 \text{ VDC, } 115 \text{ VAC } 400 \text{ Hz RESISTIVE,}$
 $100,000 \text{ OPERATIONS}$

DR. B.D. 11MAR2008

CK. J.M.B. 3/17/08

Tyco Electronics

©COPYRIGHT 2005

TYCO ELECTRONICS CORPORATION
ALL INTERNATIONAL RIGHTS RESERVED

CUST. CATALOG ITEM

CUST. NO. REV.

TE NUMBER

6-1617758-6

CII PART NUMBER

FCB-205-AT4