
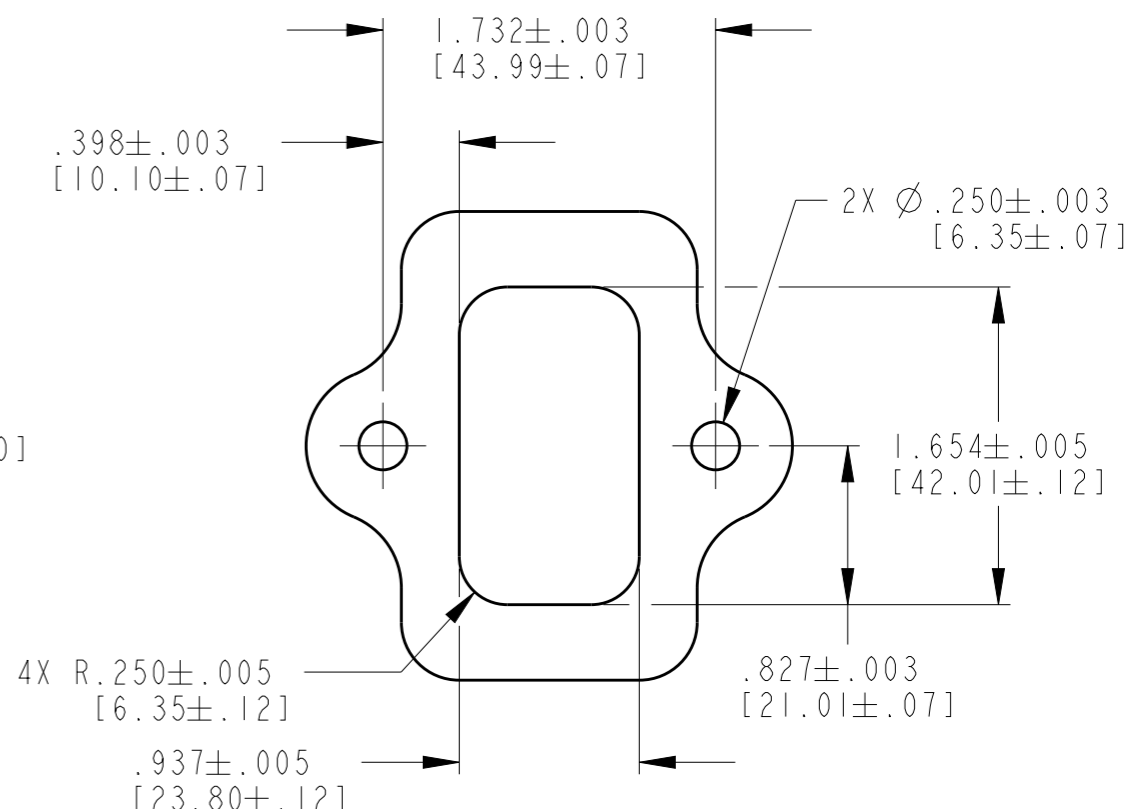
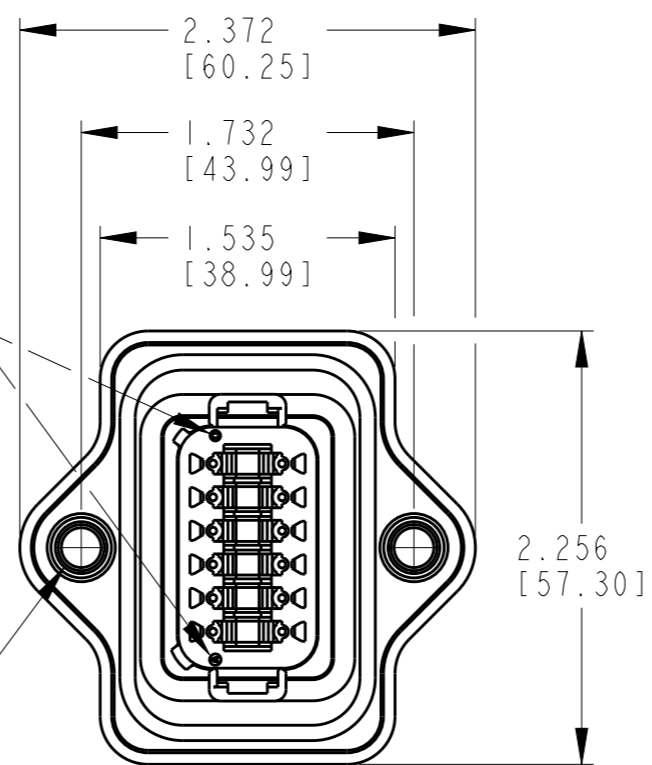
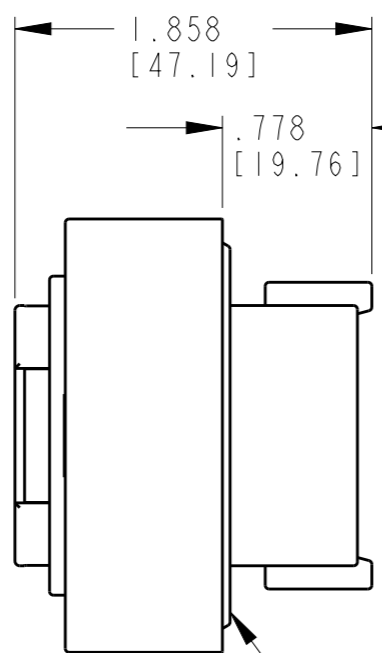


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	B1	REVISED PER PCN E-17-012564	28AUG2017	JA	DM

-E- SYMBOL DESIGNATES REDUCED DIAMETER WIRE SEAL

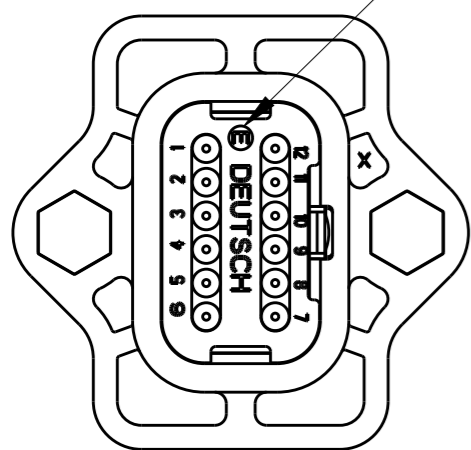

FLANGE SEAL IS INTENDED FOR NON-PRESSURIZED FLUID SPLASH ONLY

2X THREADED INSERT  
 M6 X .500 DEEP  
 RECOMMENDED TORQUE:  
 62-88 IN-LB [7-10 N-m]

RECOMMENDED MOUNTING DETAIL

4 DATE CODE: MONTH IS REPRESENTED BY SEQUENTIAL ALPHA CHARACTERS. EX: A = JANUARY, YEAR IS REPRESENTED BY LAST NUMERICAL DIGIT. EX: 0 = 2010

3 MATERIAL: HOUSING, CAP, FLANGE: PA66 GF15 (GRAY)  
 GROMMET, GASKET: VMQ (RED-ORANGE)  
 INSERTS: STAINLESS STEEL

2. THIS RECEPTACLE MATES WITH DT06-12SA-XXXX PLUG.  
 (XXXX = ALL MODIFICATIONS)  
 CONSULT FACTORY FOR MODIFICATIONS.

1 FOR CONTACTS AND WIRE PERFORMANCE AND APPLICATION CHARACTERISTICS, SEE ENVELOPE DRAWING 0425-015-0000.

NOTES: UNLESS OTHERWISE SPECIFIED

TE INTERNAL PN	DEUTSCH PN
DT04-12PA-LE06	DT04-12PA-LE06

CONTACT SIZE	MIN. INSUL. O.D.	MAX. INSUL. O.D.	WIRE RANGE [mm <sup>2</sup> ] REF ONLY
16	.053 [1.35]	.120 [3.05]	14-20 AWG [2.5-0.5]

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C. WOODRUFF 14MARI994		
DIMENSIONS: in [mm]		CHK B. BYFORD 06JUL2012		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD S. BEARD 05JUL2012	NAME 3 WAY RECEPTACLE FLANGE MOUNT THIN WALL WIRE SEAL DT SERIES	
0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ±.025 [0.64] 4 PLC ±		PRODUCT SPEC 108-151009	SIZE A3	
MATERIAL 3		FINISH	CAGE CODE 4AFU8	
		APPLIC. SPEC 0425-017-0000	DRAWING NO DT04-12PA-LE06	
		WEIGHT 73g	RESTRICTED TO	
		CUSTOMER DRAWING	SCALE 1:1	
			SHEET 1 OF 1	
			REV B1	