

MKDSP 10HV/ 3-12,7 BD:L1-L3 - 1704180

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




PCB terminal block, nom. voltage: 1000 V, pitch: 12.7 mm, number of positions: 3, color: green

The figure shows a 2-pos. version of the product

Your advantages

- ✓ Well-known connection principle allows worldwide use
- ✓ Low temperature rise, thanks to maximum contact force
- ✓ Allows connection of two conductors
- ✓ Quick and convenient testing using integrated test option
- ✓ The latching on the side enables various numbers of positions to be combined
- ✓ Integrated protective guide prevents incorrect insertion of the conductor underneath the tension sleeve

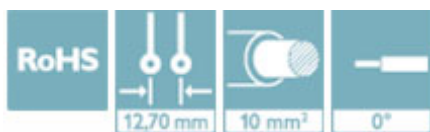

Key Commercial Data

Packing unit	50 pc
GTIN	
GTIN	4046356680417

Technical data

Dimensions

Pitch	12.7 mm
-------	---------

General

Range of articles	MKDSP 10HV
Nominal cross section	10 mm²
Stripping length	10 mm
Number of positions	3

Standards and Regulations

Connection in acc. with standard	CUL
----------------------------------	-----

MKDSP 10HV/ 3-12,7 BD:L1-L3 - 1704180

Technical data

Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"

Approvals

Approvals

Approvals

IECEE CB Scheme / SEV / EAC / cULus Recognized

Ex Approvals

Approval details

IECEE CB Scheme		http://www.iecee.org/	CH-8225
Nominal voltage UN	1000 V		
Nominal current IN	57 A		
mm²/AWG/kcmil	16		

SEV		https://www.electrosuisse.ch/de/meta/shop/produktezertifikate.html	IK-3542-M1
Nominal voltage UN	1000 V		
Nominal current IN	57 A		
mm²/AWG/kcmil	16		

EAC		B.01742	
-----	---	---------	--

MKDSP 10HV/ 3-12,7 BD:L1-L3 - 1704180

Approvals

cULus Recognized  http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm E60425-19770427		
	B	C
Nominal voltage UN	600 V	600 V
Nominal current IN	60 A	60 A
mm²/AWG/kcmil	20-6	20-6

Phoenix Contact 2018 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>