

## Main

|                                    |                      |
|------------------------------------|----------------------|
| Accessory / separate part category | Cabling accessory    |
| Accessory / separate part type     | Pre-wired connectors |
| Series name                        | General purpose      |

## Complementary

|                          |                                       |
|--------------------------|---------------------------------------|
| Electrical connection    | M12, 4 pins straight female connector |
| Cable connector fixing   | Screw-on                              |
| Collar material          | Metal                                 |
| Status LED               | Without                               |
| Cable length             | 32.81 ft (10 m)                       |
| Cable outer diameter     | 0.2 in (5.2 mm)                       |
| Cable composition        | 4 x 0.34 mm <sup>2</sup>              |
| Wire insulation material | PUR                                   |
| System Voltage           | 250 V AC<br>300 V DC                  |
| Line Rated Current       | 4 A                                   |
| Contact resistance       | 5000 µOhm                             |
| Insulating resistance    | 1 GΩ                                  |
| Product weight           | 0.82 lb(US) (0.37 kg)                 |

## Environment

|                                       |   |
|---------------------------------------|---|
| IP degree of protection               | IP65<br>IP67<br>IP69K   |
| product certifications                | CULus   |
| ambient air temperature for operation | -40...176 °F (-40...80 °C) (static)<br>23...176 °F (-5...80 °C) (flexing) |
| ambient air temperature for storage   | -40...176 °F (-40...80 °C)  |


## Offer Sustainability

|  |  |
|--|--|
| Green Premium product  | Green Premium product  |
| Compliant - since 0649 - Schneider Electric declaration of conformity  | Compliant - since 0649 - Schneider Electric declaration of conformity  |
| Reference not containing SVHC above the threshold  | Reference not containing SVHC above the threshold  |
| Available  | Available  |
| Available  | Available  |
| WARNING: This product can expose you to chemicals including:   | WARNING: This product can expose you to chemicals including:   |
| Diisononyl phthalate (DINP), which is known to the State of California to cause cancer, and                                | Diisononyl phthalate (DINP), which is known to the State of California to cause cancer, and                                |
| Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. | Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. |

Contractual warranty

|                 |           |
|-----------------|-----------|
| Warranty period | 18 months |
|-----------------|-----------|


Dimensions

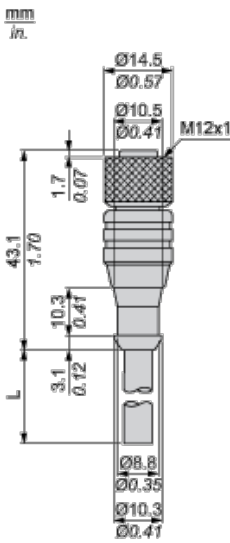

L : Lenght of cable

Connections and Schemes

Connector



BN : Brown

BK : Black

BU : Blue

WH :White