

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

20

© COPYRIGHT 20

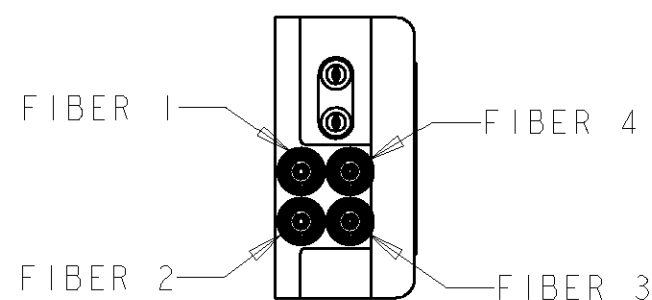
BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC
EADIST
17

REVISIONS

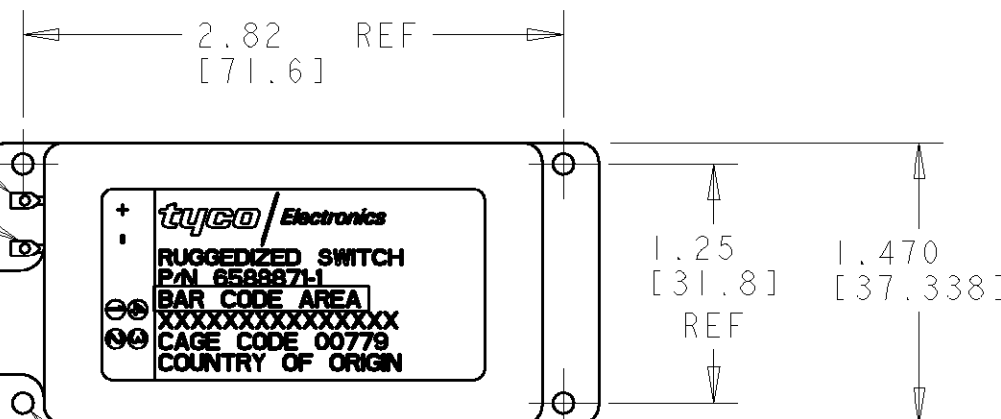
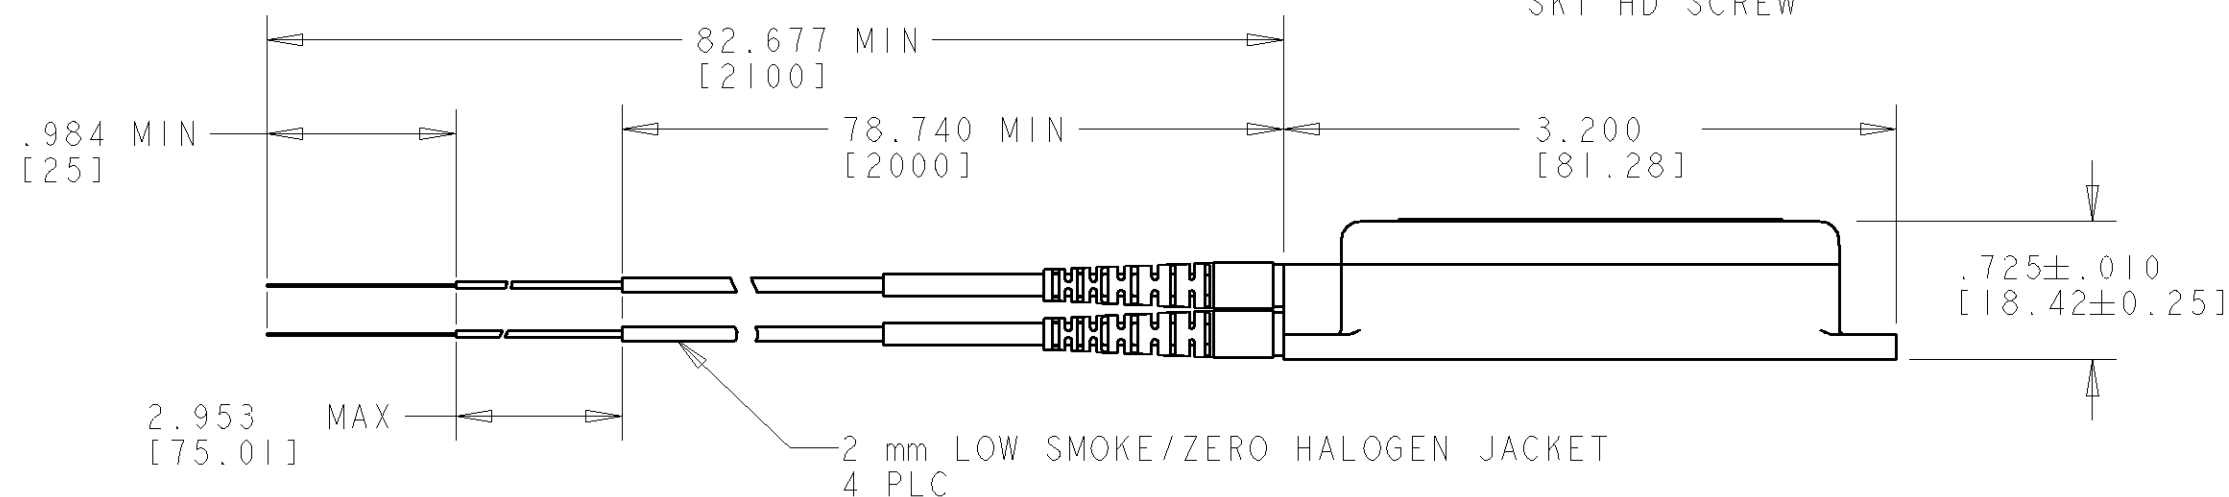
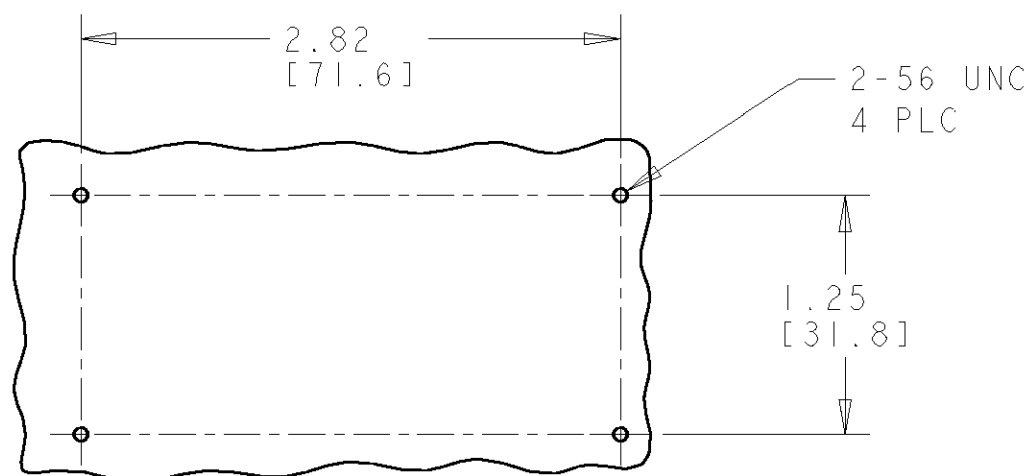
P	LTR	DESCRIPTION	DATE	DWN	APVD
	I	NEW PRODUCT RELEASE	09MAR06	SM	RP

1. PIGTAIL NOT TO EXCEED A MINIMAL BEND RADIUS OF 30mm.
2. FOR DESIGN OBJECTIVES SEE 108-2128 SPECIFICATION.
3. THIS PRODUCT HAS NOT COMPLETED VALIDATION TESTING.

62.5/125/250 FIBER
4 PLC

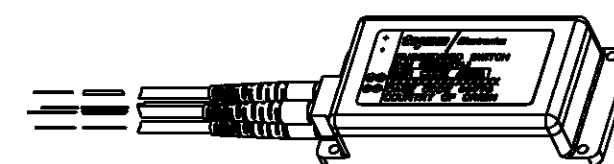
POS. FEED THROUGH TERMINAL

NEG. FEED THROUGH TERMINAL

900 μ m TUBING
4 PLC $\varnothing$.109
[2.77]
4 PLC
ACCEPTS 2-56
SKT HD SCREW2 mm LOW SMOKE/ZERO HALOGEN JACKET
4 PLC

RECOMMENDED MOUNTING LAYOUT

PRELIMINARY



SCALE 1:2

6588871-1

PART
NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.		DWN S. MONGOLD 09MAR06	tyco Electronics		Tyco Electronics Harrisburg, PA 17105-3608	
DIMENSIONS: INCHES [mm]		CHK R. PAUL 09MAR06			NAME REFRACTIVE PLATE SWITCH NON-LATCHING	
		APVD F. ABENDSCHEIN 09MAR06	PRODUCT SPEC		SIZE A3	
			APPLICATION SPEC		CAGE CODE 00779	
MATERIAL			WEIGHT		DRAWING NO C=6588871	
FINISH			CUSTOMER DRAWING		RESTRICTED TO	
			SCALE		SHEET OF REV	