



- Crimp all three terminals at once.
- Faster loading of plug molds.
- Reduce plug molding and cycle time.
- Reduce plug cost while improving plug quality.
- 7-Shape blades feature ledge to maintain position during overmolding.
- Pass elevated temperature pullout test with low cost PVC.
- Automated terminating equipment is available, see page 8-60.
- See page 8-60 for wire stripper information.
- DFARS Compliant

Heyco® Preassembled Cordset Components


For Heyco Application Equipment, see pages 8-59 and 8-60

Male Bridge–NEMA 5-15P


PART DATA			PART	APPLICATION TOOLING*				CRIMP DIMENSIONS	
Type	Color	AWG Range		Die	Feeds	Crimp Punch	Anvil	A in.	B in.
5-15P Male Bridge	Black	18-14	S7560	Z360	Semi-Auto*	Z318, Z408	Z302	.26	.40
	Natural	18-14	S7561						
	Clear	18-14	S7596						
5-15P Male Bridge Tinned	Black	18-14	S7564						
	Natural	18-14	S7599						
	Clear	18-14	S7598						
5-15P Male Bridge 7-Shape	Black	18-14	S7562	Z461	Semi-Auto*	Z446, Z454, Z444, Z453	Z445	.30	.44
5-15P Male Bridge	Natural	12-10	S7590						
	Clear	12-10	S7592						
	Clear	12-10	S7597						
5-15P Male Bridge 7-Shape	Black	12-10	S7591						
	Natural	12-10	S7593						
	Clear	12-10	S7589						

NEW!



7-Shape Blades feature a retention ledge to maintain position during overmolding (mold stop).
*Semi-Automatic Terminating Equipment is available, see below and page 8-58.

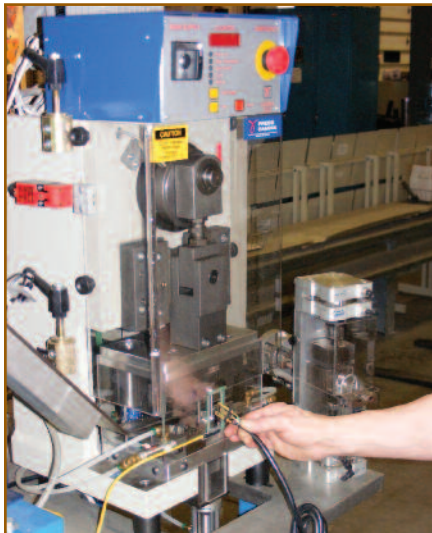

Heyco Male Bridge Machine
(see page 8-60)



S7560

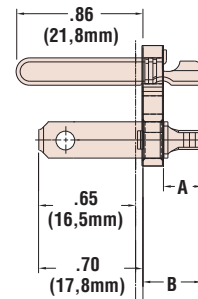

.050 REC. OVERMOLD THICKNESS ON FACE

Quick
Specs

Materials	Alloy 260 Brass (70% Cu, 30% Zn. Higher Cu content resists dezincification) Black and Natural - 6/6 Nylon, Clear - Polycarbonate
Certifications	Recognized Component under UL File E164169 (Component Blades only) Certified by the Canadian Standards Association File 91824
Standards	NEMA 5-15P