



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - TE Connectivity Ltd. ALL RIGHTS RESERVED.

P	LTR	DESCRIPTION	DATE	DWN	APVD
	H	REVISE PER ECR-17-017464	30NOV2017	GSK	KN

Tooling Drawing NO.
 USB A: TR00662

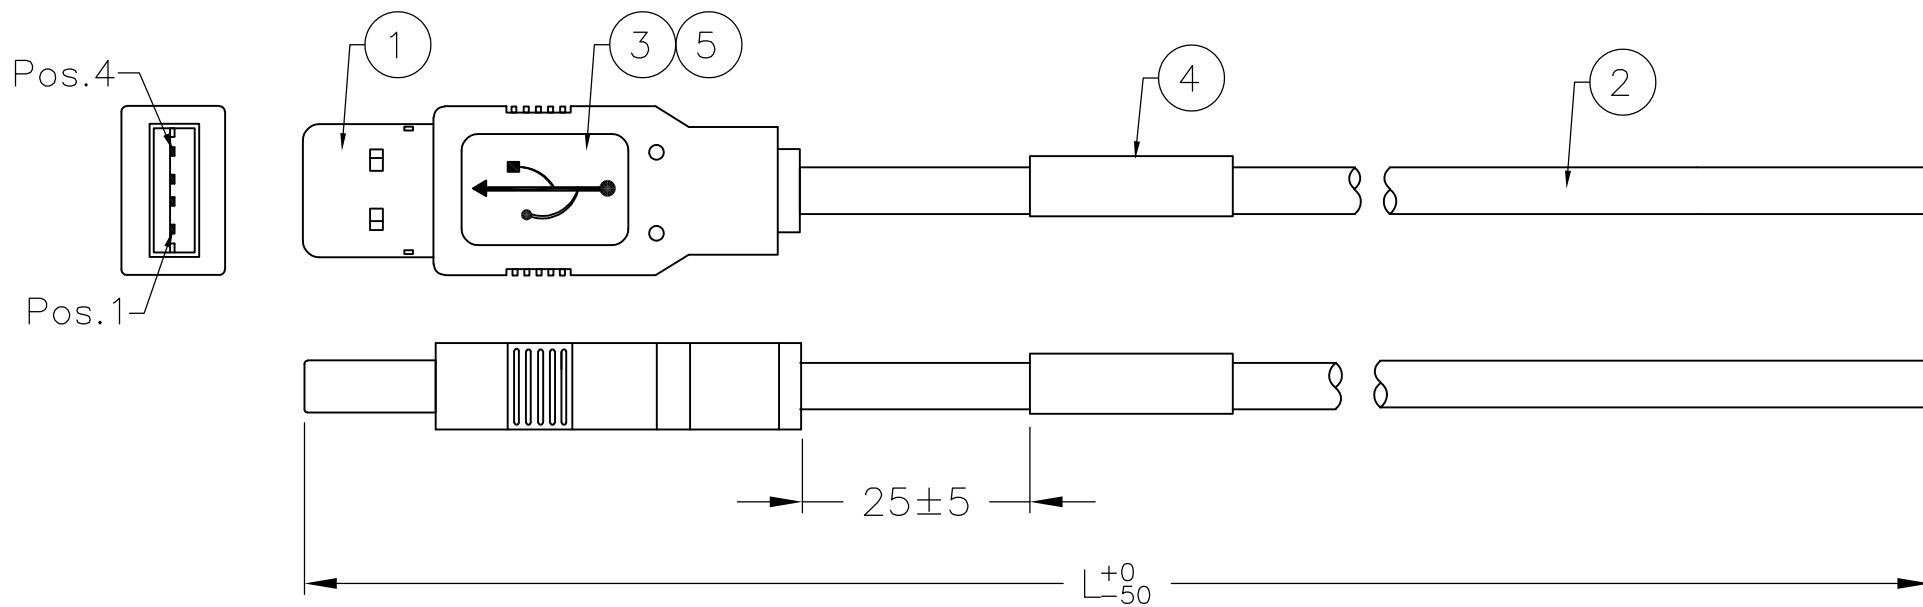

PIN ASSIGNMENT :

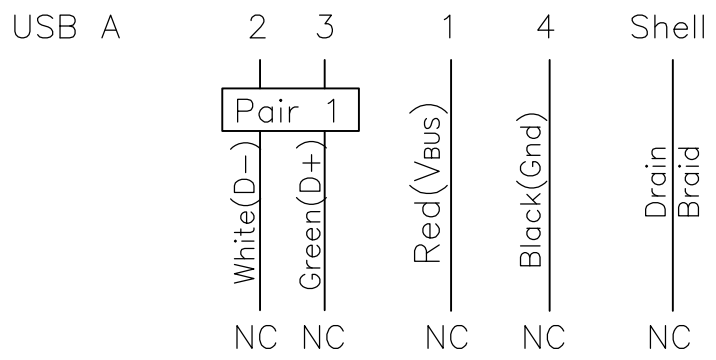

1487601-2	1500
1487601-1	2000
TE P/N	LENGTH(L)

- NOTES:
- TESTED FOR CONTINUITY, SHORTS AND OPENS, HI-POT 630V FOR 10MS.
 - CABLE ASSEMBLY MEETS USB 2.0 STANDARDS.
 - EXPOSED CABLE BRAID IS NOT PERMISSIBLE BEYOND OVERMOLD.
 - THE FINAL CABLE ASSEMBLY MAXIMUM LENGTH NOT TO EXCEED 2700MM PER USB SPECIFICATIONS.
 - PRODUCT AND PROCESSING MUST MEET REQUIREMENTS OF TEC-138-702.

REV	DESCRIPTION	ITEM		
AR	AR	MR	COPPER FOIL, W: 5MM	5
1	1	PC	SBP LABEL, WHITE, 25.4 X 36.5mm	4
AR	AR	KG	Overmold PVC, 40P, Color: Black(BK01)	3
AR	AR	MR	USB 2.0 Cable 28AWG*1P+24AWG*2C+Al/Mylar +Drain+Braid, Color: Black(BK01).	2
1	1	EA	USB 4Pin Connector Contacts: Gold 30U Plated, Shell: Nickel Plated, Housing UL94V-0 A Type.	1
-2	-1	U/M		

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN BOVEY LIU 25/FEB/02	TE Connectivity CABLE ASSEMBLY, USB A TYPE TO NC	
DIMENSIONS: mm		CHK K. NGUYEN		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD F.D. McCORKEL 15/MAR/02	NAME	
0 PLC ± -		PRODUCT SPEC	-	
1 PLC ± -		APPLICATION SPEC	-	
2 PLC ± -		WEIGHT	-	
3 PLC ± -		SIZE	A3	
4 PLC ± -		CAGE CODE	00779	
ANGLES ± -		DRAWING NO	C-1487601	
FINISH		RESTRICTED TO	-	
MATERIAL		CUSTOMER DRAWING		
-		SCALE	N.T.S.	
		SHEET	1 OF 1	
		REV	H	