

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

20

© COPYRIGHT 20

BY -





ALL RIGHTS RESERVED.

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL	23JUN2015	DW	CW
	A1	ECR-15-012067	10AUG2015	DW	CW

NOTES:
1. TECHNICAL CHARACTERISTICS:
HOUSING MATERIAL: DIE CAST ALUMINIUM ALLOY
SURFACE: POWDER COATED, GREY
OPERATION TEMPERATURE: -40-+125°C
DEGREE OF PROTECTION: IP65 (MATED)

注释:
1. 技术参数:
下壳材料: 铝合金
表面处理: 粉末涂层, 灰色
工作温度: -40-+125°C
防护等级: IP65(配合)

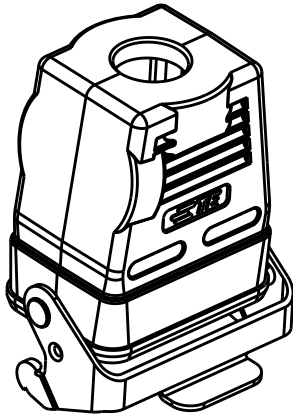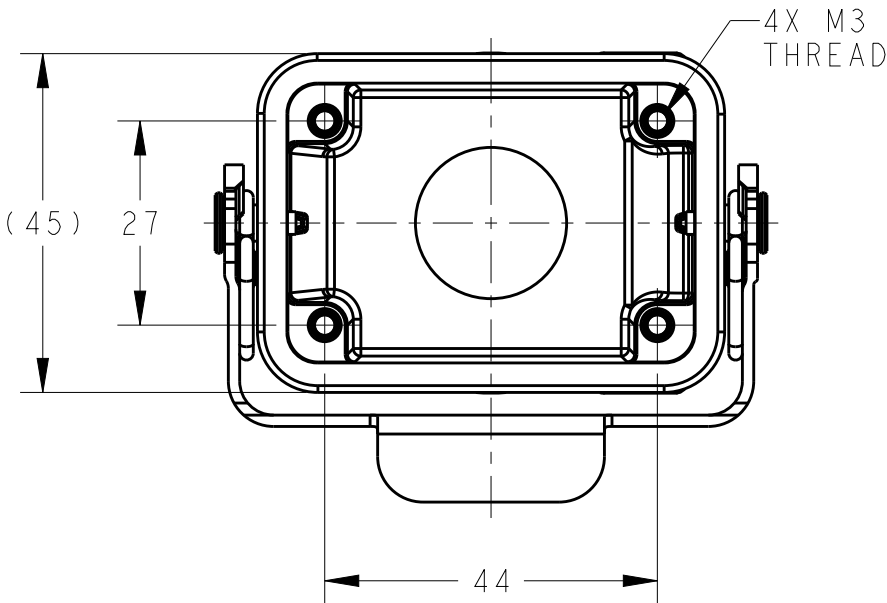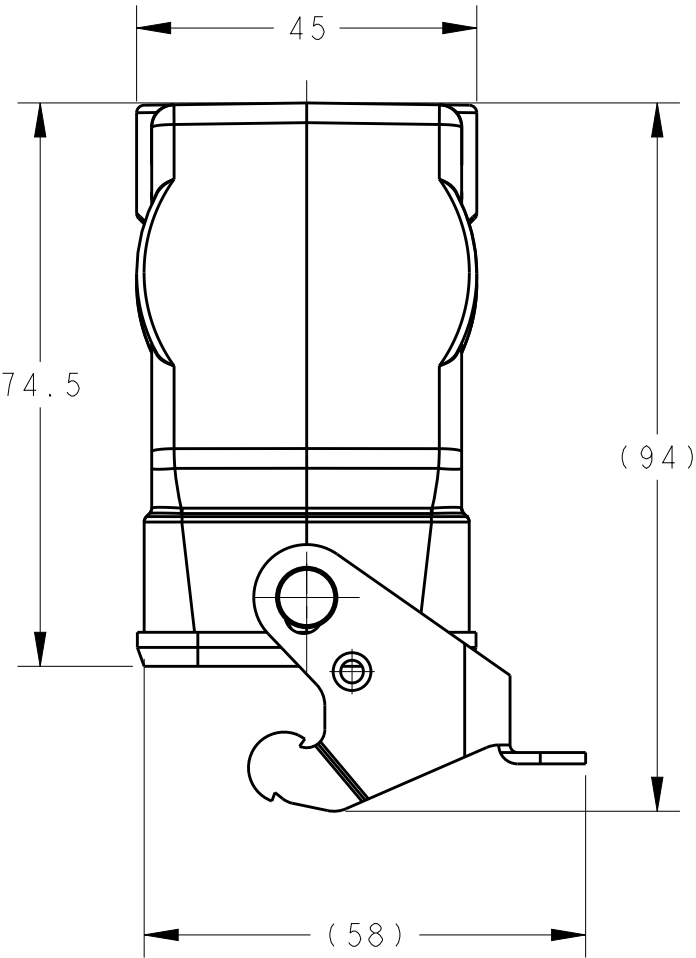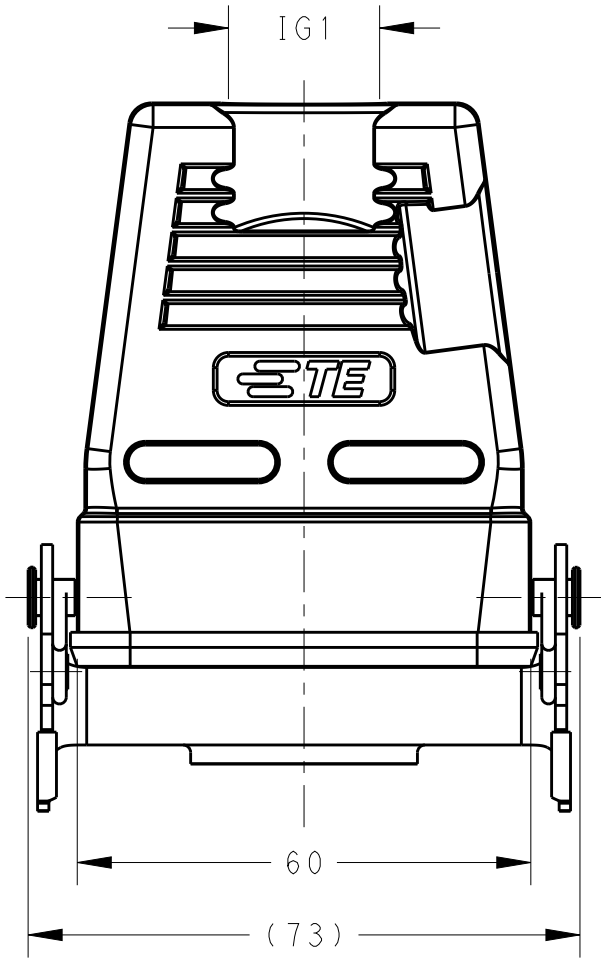

SCALE 1:2

T1770063120-000	H6B-TBFH-M20	M20
T1770063121-000	H6B-TBFH-PG21	PG21
T1770063125-000	H6B-TBFH-M25	M25
T1770063129-000	H6B-TBFH-PG29	PG29
T1770063132-000	H6B-TBFH-M32	M32
PART NUMBER	DESCRIPTION	IG1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 23JUN2015 David Wang	 TE Connectivity		
DIMENSIONS:		CHK 23JUN2015 Chris Wang			
mm		APVD 23JUN2015 Xiang Xu			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC			
1 PLC ±-		108-137013	NAME H6B-TBFH-M/PG		
2 PLC ±-		APPLICATION SPEC			
3 PLC ±-		114-137013	SIZE CAGE CODE DRAWING NO RESTRICTED TO		
4 PLC ±-		WEIGHT			
ANGLES ±-		-	A300779C-T17700631XX000		
FINISH		-			
MATERIAL		-	Customer Drawing		
-		-			
			SCALE 1:1	SHEET 1 OF 1	REV A1