


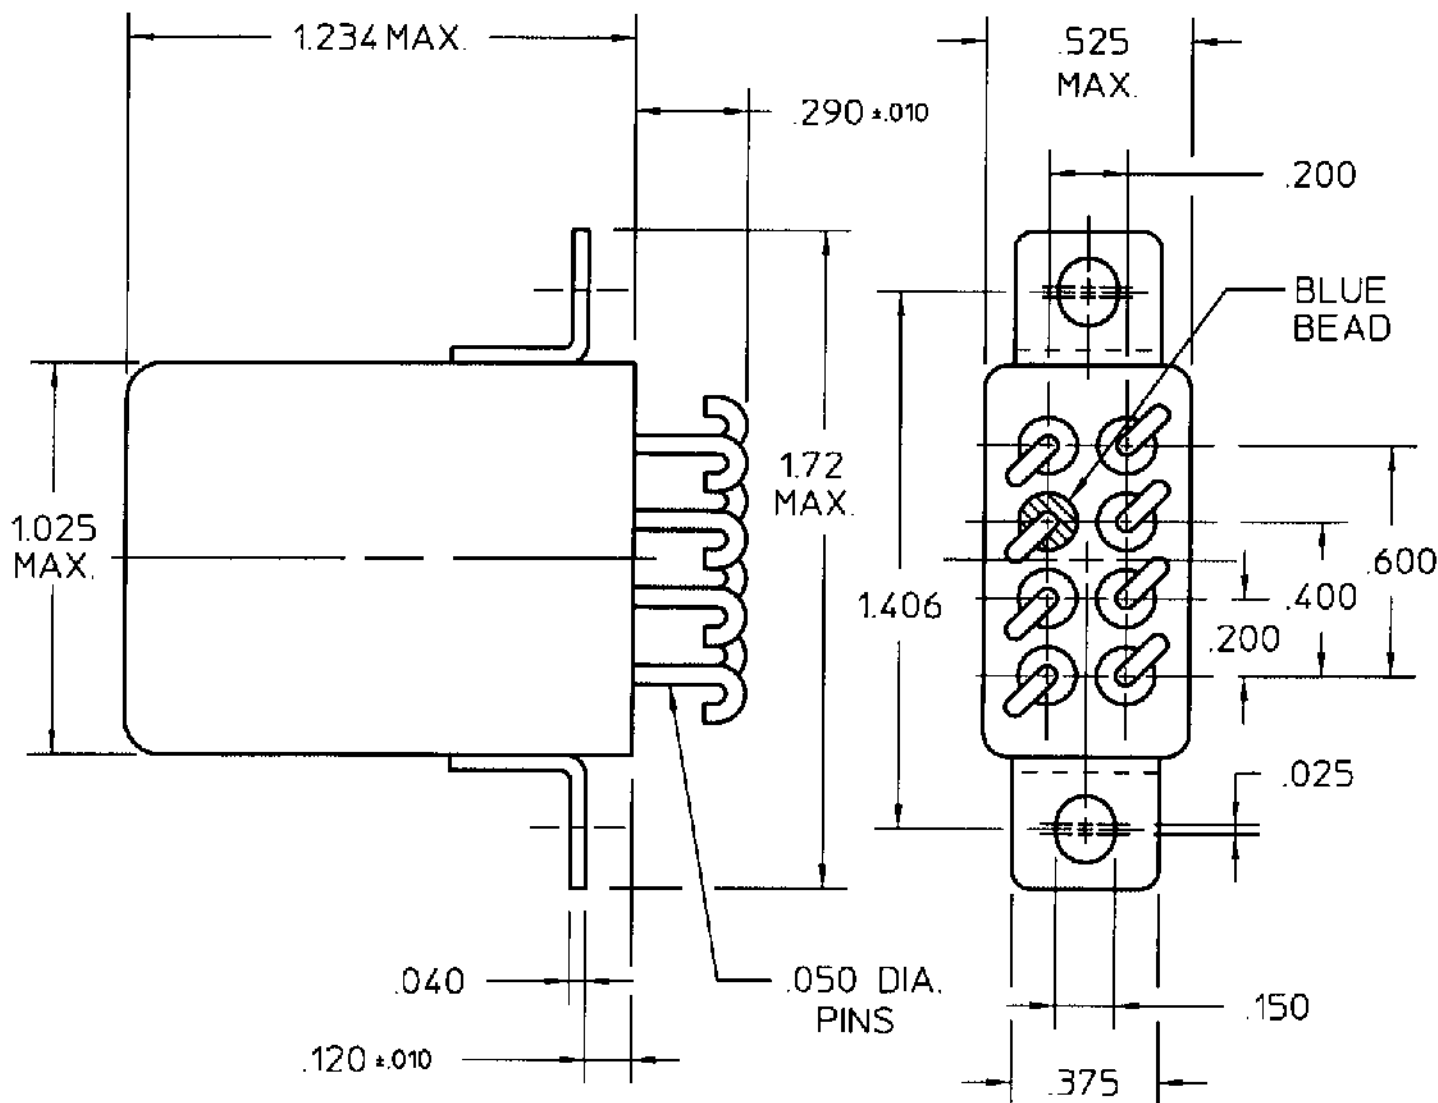

REV. 2 10/10/95

#### COIL:

|                 |                          |
|-----------------|--------------------------|
| RESISTANCE      | 7500 OHMS ± 10%          |
| NOMINAL VOLTAGE | 115.0 VAC (60-400 Hz)    |
| MUST OPERATE    | 66.0 VAC (60-400 Hz)     |
| MUST RELEASE    | 7.0 VAC MIN. (60-400 Hz) |

#### ENVIRONMENT:


|             |     |        |      |              |    |     |
|-------------|-----|--------|------|--------------|----|-----|
| VIBRATION   | 10  | CPS TO | 2000 | CPS @        | 20 | g's |
| SHOCK       | 100 | g's    | 6    | MS. DURATION |    |     |
| TEMPERATURE | -65 | °C TO  | +125 | °C           |    |     |

|        |                               |
|--------|-------------------------------|
| NOTES: | OPERATE TIME 15 MS MAX.       |
|        | RELEASE TIME 20 MS MAX.       |
|        | CONTACT BOUNCE 5 MS MAX. (NC) |
|        | 2 MS MAX. (NO)                |

CUST. Hi-G  
CUST. NO. 2TR-10-215

TYPE "07" RELAY

#### CUSTOMER DATA SHEET

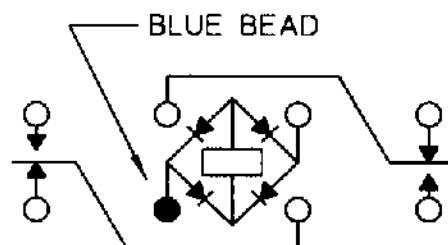

CONTACT RATING: 10 AMPS 30 VDC RES.  
10 AMPS 115 VAC 400 Hz, 6A 30 VDC  
INDUCTIVE 100,000 OPERATIONS

DR. R.B. 12/12/91 CK 10/10/95



COMMUNICATIONS  
INSTRUMENTS, INC.

B07B942BZ1-8022