


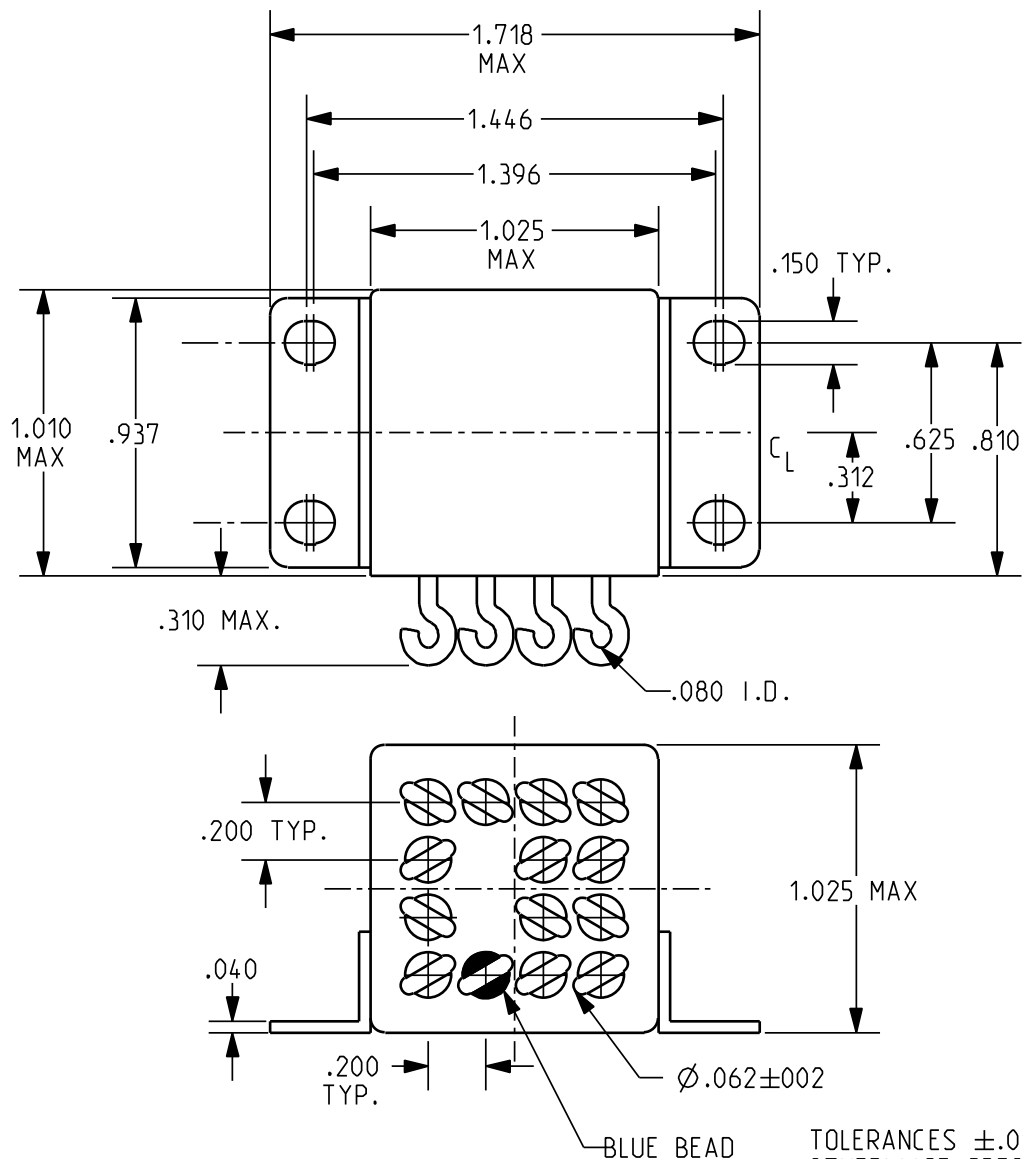


REV. B  
DCO 300859

COIL: @ 25°C  
RESISTANCE 290 OHMS  $\pm 10\%$   
NOMINAL VOLTAGE 28 VDC  
MUST OPERATE 13.5 VDC MAX.  
MUST RELEASE 5.5 VDC MAX., 2.3 VDC MIN.

ENVIRONMENT:  
VIBRATION 57 Hz TO 3000 Hz @ 20 g's  
SHOCK 100 g's 6 MS. DURATION  
TEMPERATURE -70 °C TO +125 °C

NOTES: OPERATE, RELEASE 15 MS MAX.  
CONTACT STABILIZATION 2.5 MS MAX.  
CONTACT BOUNCE 1 MS MAX.

## CUSTOMER DATA SHEET

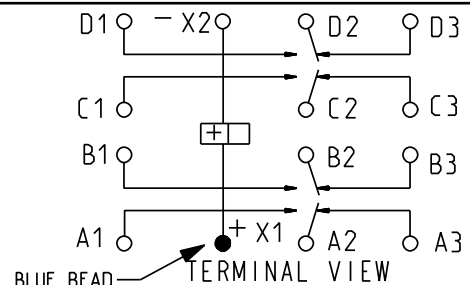

CONTACT RATING: LOW LEVEL  
10 AMPS 28 VDC, 115 VAC 400 Hz RESISTIVE  
100,000 OPERATIONS

DR. B.D. 16MAY2008 CK. J.M.B. 5/19/08

**Tyco Electronics**

©COPYRIGHT 2005  
TYCO ELECTRONICS CORPORATION  
ALL INTERNATIONAL RIGHTS RESERVED

CUST. QPL  
CUST. NO. M83536/15-024M REV. ----

TE NUMBER  
1617754-4

CII PART NUMBER  
FCA-410-1524M