


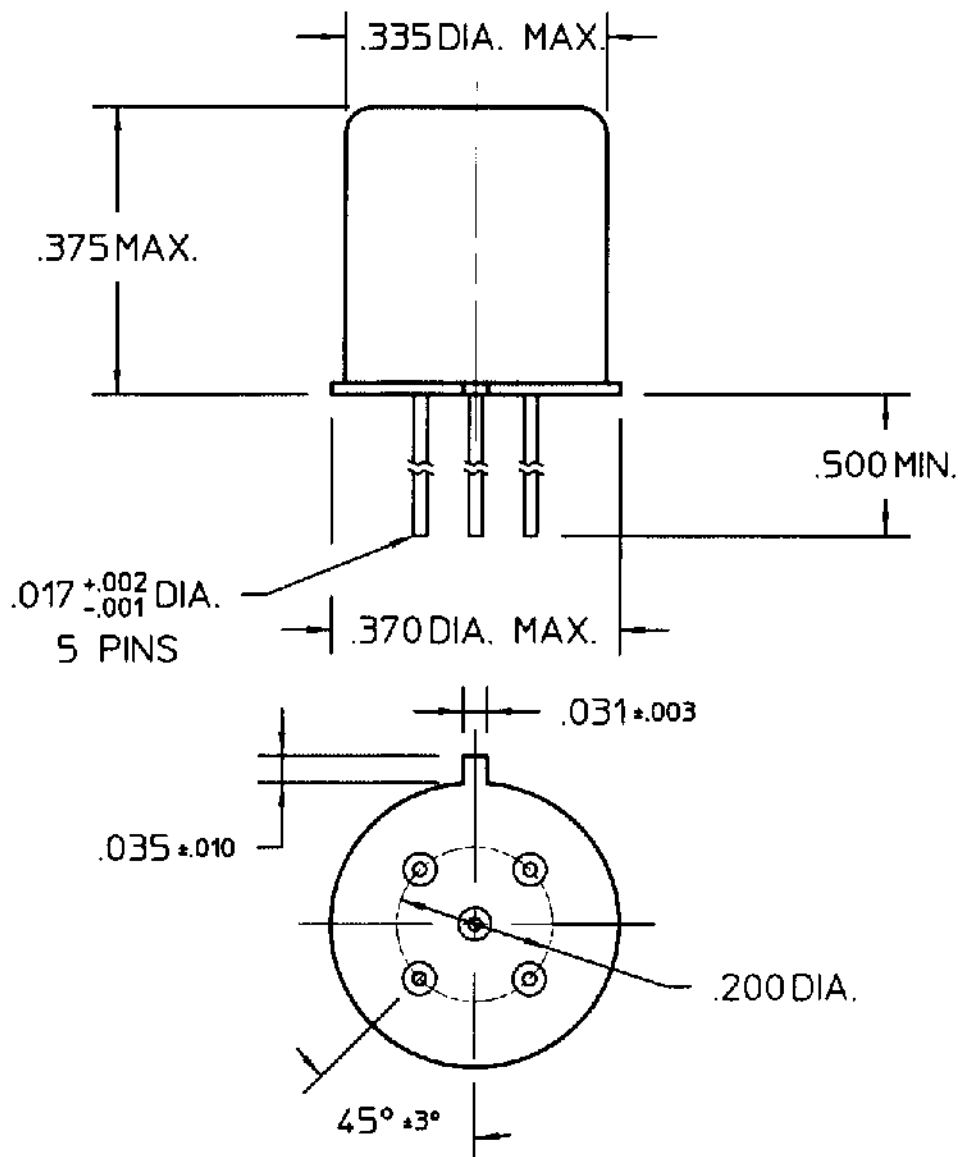

REV. 0
DCO 142073


COIL: @ 25°C
RESISTANCE 4000 OHMS $\pm$ 10%
NOMINAL VOLTAGE 26.5 VDC
MUST OPERATE 15.4 VDC
MUST RELEASE 8.0 VDC MAX. 1.37 VDC MIN.

ENVIRONMENT:

VIBRATION 10 CPS TO 3000 CPS @ 30 g's
SHOCK 75 g's 6 MS. DURATION
TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE TIME 4.0 MS MAX.
RELEASE TIME 7.5 MS MAX.
CONTACT STABILIZATION TIME 2.0 MS MAX.

CUSTOMER DATA SHEET



TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO 1A
28 VDC RESISTIVE 100,000 OPERATIONS

DR. PBB 6/6/00

CR. 6/6/00

COMMUNICATIONS
INSTRUMENTS, INC.

CUST. OPL
CUST. NO. M39016/26-036P REV.

J1MSDD RELAY

J1MSCDD-26XP