
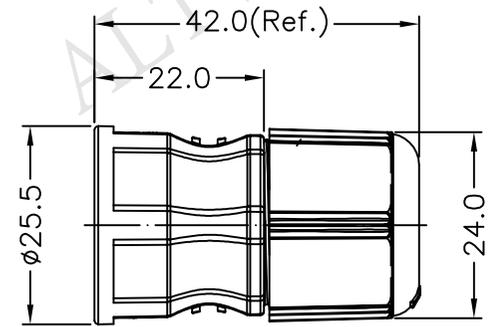






REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A	Initial Release	2014/06/28	Tom gu	Change Rev.1 To Rev.A

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

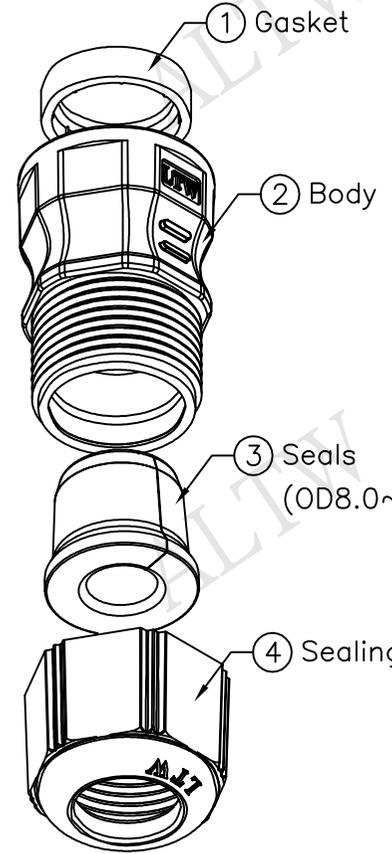

Note:

- * ⓐ Important Dimension To Check
- * Waterproof Rating: IP67
- * Cable OD: $\phi 8.0 \sim \phi 9.5 \text{mm}$
- * Gasket: Silicone, Gray.
- * Seals: Silicone, Gray.
- * Body: PPO, Black.
- * Sealing Nut: PC+PBT, Black.
- * ①②③④ 組裝放入一個 PE 袋
- * ④ 只需鎖 2~3 牙
(Assembly Put In One PE Bag)
- * 線材必須為充實型，建議鎖合力為 8~10Kg

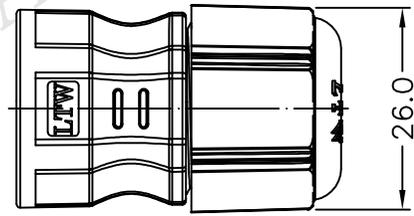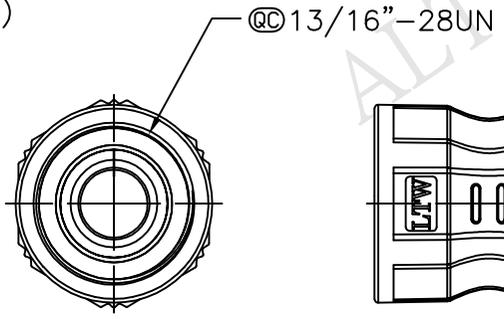

UNIT:mm	
TOLERANCE	
.X	±0.25
.XX	±0.1
.XXX	±0.05
ANGLES	±1°

TITLE 13/16"-28UN Ass'y (After Plug In)OD 8.0~9.5mm	
SCALE Free	SHEET 1 OF 1
REV. A	SIZE A4
ⓐ :Inspection Item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO CSG-CSP002	DRAWN BY Tom
DWG NO CSG-CSP002	CHECKED BY Ludi
CUSTOMER ALTW	APPROVED BY Victor

DATE 2014/06/28
DATE 2014/06/28
DATE 2014/06/28