
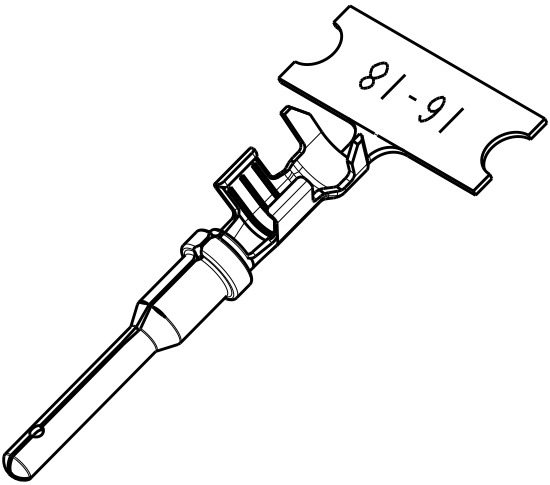


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
			F	REVISED PER E.O. PI6998	08DEC2000	SP	RDR
			G	REVISED PER E.O. PI9555	11JUL2007	JA	RDR
			H	REVISED PER E.O. P20396	25JUN2010	JA	RDR
			J	REVISED PER ECO-15-007761	289MAY2015	RL	DM

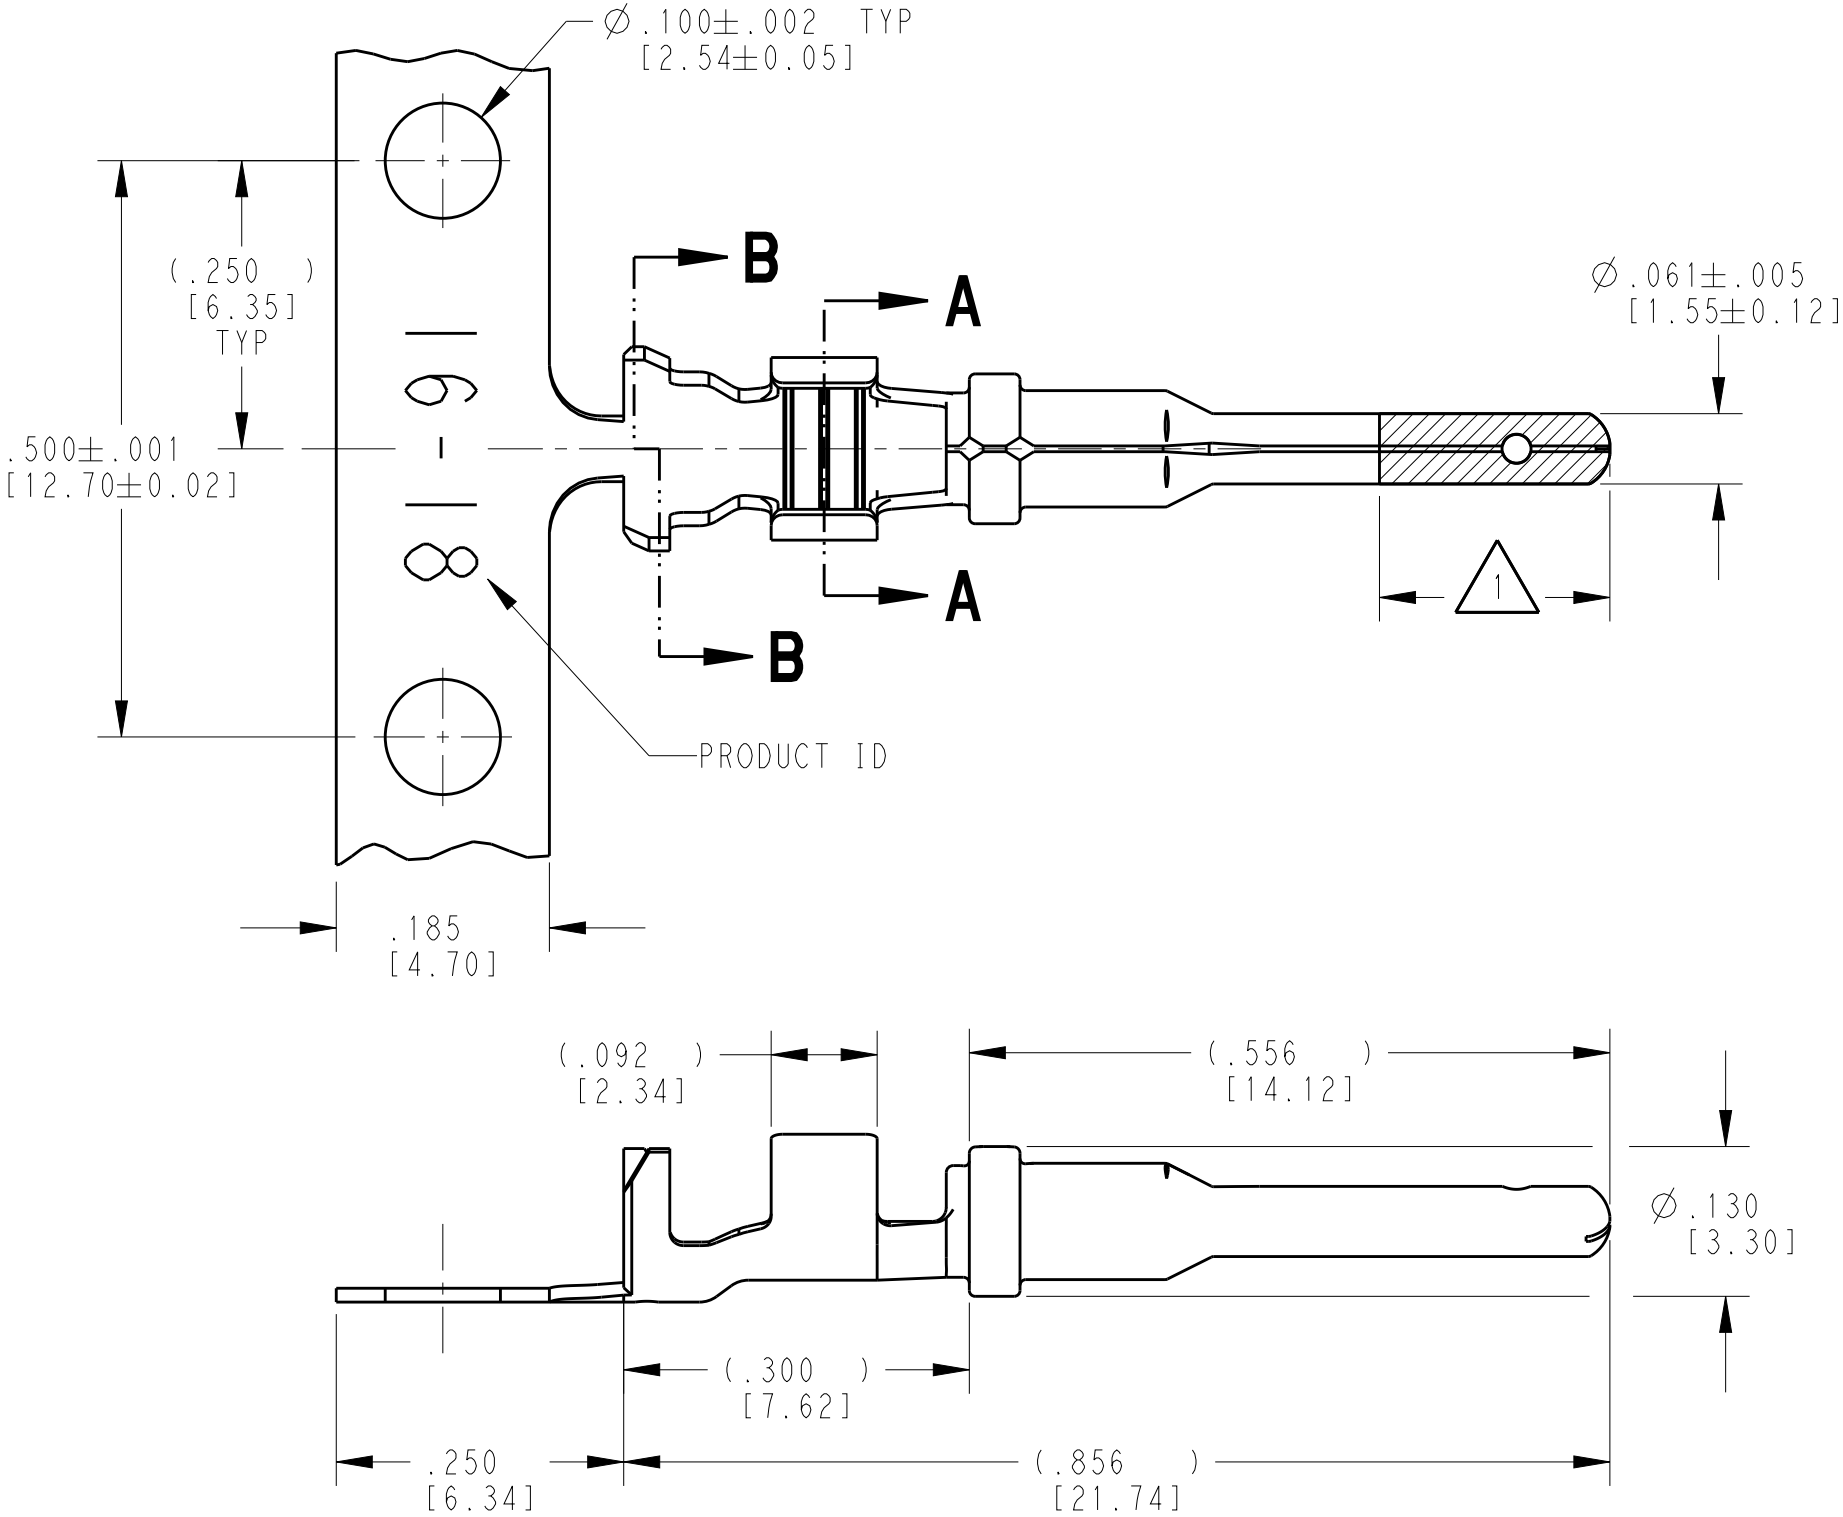


SECTION A-A
WIRE BARREL

SECTION B-B
INSULATION BARREL

- 3 MATERIAL: .012 [0.30] THICK COPPER ALLOY
2. WIRE RANGE: 18 AWG TO 14 AWG [0.75-2.0 mm²]
INSULATION RANGE: $\varnothing .075$ -.140 [$\varnothing$ 1.91-3.56]
- 1 APPLIES ONLY TO SELECTIVE GOLD 1060-16-0144.
INDICATED DIMENSION SHOWS GOLD PLATED AREA.

NOTES: UNLESS OTHERWISE SPECIFIED

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M. BLUM 04NOV1999		 TE Connectivity			
DIMENSIONS: INCHES[mm]		CHK A. ROLINSKI 08DEC2000					
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD R. REED 08DEC2000		NAME STAMPED CONTACT PIN SIZE 16			
		PRODUCT SPEC 0425-015-0000					
		APPLICATION SPEC 114-151000					
0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ±.025 [0.64] 4 PLC ± ANGLES ±		WEIGHT 0.33 g		SIZE A3	CAGE CODE 4AFU8	DRAWING NO C-1060-16-01XX	RESTRICTED TO -
MATERIAL 		FINISH SEE TABLE		Customer Drawing			
				SCALE 6:1	SHEET 1	OF 1	REV J