


1	2	3	4
Empfohlener Ausschnitt fuer Rastbefestigung (Glat gegenueber Bestueckungsseite) recommended cut-out for snap-in fixing (ledge opposite to snap-in direction)	Wanddicke wall thickness 0.8 bis/to 5.0	Ausschnittlaenge length of cut-out 27.2±0.1	Ausschnittbreite width of cut-out 12.2 ^{+0.2}

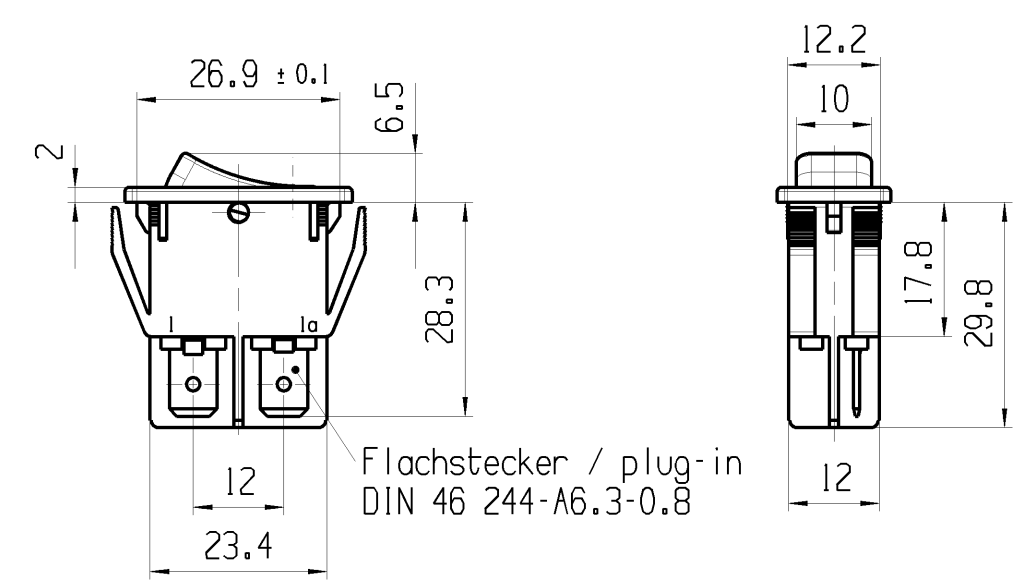

Flachstecker / plug-in
DIN 46 244-A6.3-0.8

schwarz
black

Wippe schwarz
rocker black

Aufschrift
Marking

155..
16(4)/250 ~ T100/55 T100
10(4)/250 ~ 5E4
5/100A 250V ~



16A 125-250V AC
1 HP 125V AC
2 HP 250V AC
R38

Herstellort/-jahr/-woche
nach DIN EN 60062
code of manufacture:
place/year/week
acc. to DIN EN 60062

Ausschalter 1-polig
Fuer Geraete der Klasse II geeignet

SPST
suitable for appliances of class II

Fuer Form und Lage FOR SHAPE AND LOC.		☉ =	Allgemeintoleranzen UNTOLERANCED DIMENSIONS					Pause COPY	Blatt SHEET		TYP	Zeichn./DRAWING NO.	Index	
			PROJEKTION	Abmasse und Nennmassbereiche Angaben in mm		Laenge LENGTH	Radien RADI		01					
Fuer Winkel FOR ANGLE ± 2								ALL DIMENSIONS ARE IN MILLIMETRES	0-6	± 0.2	± 0.2	Original Din A4	Masstab SCALE 1 : 1 30mm	
			>6-15	± 0.4	±									
			>15-30	± 0.4	±									
			>30-70	±	±									
			>70-120	±	±									
									0	10	20	30mm	GERAETESCHALTER APPLIANCE SWITCH	
									CAD: NX V6.0					
a	69572	23.08.10	HHE						gez./DRAWN BY 23.09.08 BRC			 MARQUARDT		
	60290	23.09.08	BRC						gepr./CHECKED BY					
Ausg. ISSUE	Aenderung REVISION	gez. DRAWN BY		Ausg. ISSUE	Aenderung REVISION	gez. DRAWN BY			Ersatz fuer/REPLACEMENT OF					