

MD SERIES P18TG-XXXXZ2:1H35M 3.5 KV ISOLATED 4 W REGULATED DUAL OUTPUT DIP24

Available Inputs:

12, 24 and 48 VDC Wide Input 2:1

Available Outputs:

(+/-) 3.3, 5, 12, 15 and 18 VDC

Other specifications please enquire.

Electrical Specifications

(Typical at + 25° C, nominal input voltage, rated output current unless otherwise specified)

Input Specifications

Voltage range

9 - 18 VDC (12 VDC), 18 - 36 VDC (24 VDC), 36 - 72 VDC (48 VDC)

Filter

Pi Network

Isolation Specifications

Rated voltage

3500 Vdc

Leakage current

1 mA

Resistance

10⁹ Ohm

Capacitance

120 pF typ.

Output Specifications

Voltage accuracy

+/- 1 % typ. +/-2% max.

Ripple and noise (at 20 MHz BW)

60 mV p-p, max.

Short circuit protection

Continuous , restart automatic

Line voltage regulation

+/- 0,5 % max.

Load voltage regulation

+/- 0,5 % max.

Temperature coefficient

+/- 0,02 % / °C

General Specifications

Efficiency

70 % to 85 %

Switching frequency

250 KHz, typ.

Environmental Specifications

Operating temperature (ambient)

-40°C to +85°C

Storage temperature

- 55 °C to + 125 °C

Derating

See graph

Humidity

Up to 90 %, non condensing

Cooling

Free air convection

Physical Characteristics

Dimensions

31,75 x 20,32 x 10,16 mm

1,25 x 0,80 x 0,40 inches

Weight

19,0 g


Case material

Nickel Coated Copper


Examples of Partnumbers/Modelcode

PART NO.	INPUT VOLTAGE (VDC) Nominal	INPUT CURRENT NO LOAD	INPUT CURRENT FULL LOAD	OUTPUT VOLTAGE (VDC)	OUTPUT CURRENT (max. mA)	EFFICIENCY FULL LOAD (% TYP.)
P18TG-123R3Z2:1H35M	9-18	27	371	+/- 3.3	+/- 500	74
P18TG-1205Z2:1H35M	9-18	27	450	+/- 5	+/- 400	74
P18TG-2405Z2:1H35M	18-36	26	222	+/- 5	+/- 400	75
P18TG-2412Z2:1H35M	18-36	26	211	+/- 12	+/- 167	79
P18TG-2415Z2:1H35M	18-36	26	211	+/- 15	+/- 133	79
P18TG-4805Z2:1H35M	36-72	22	113	+/- 5	+/- 400	74
P18TG-4815Z2:1H35M	36-72	22	105	+/- 15	+/- 133	79

Dimensions

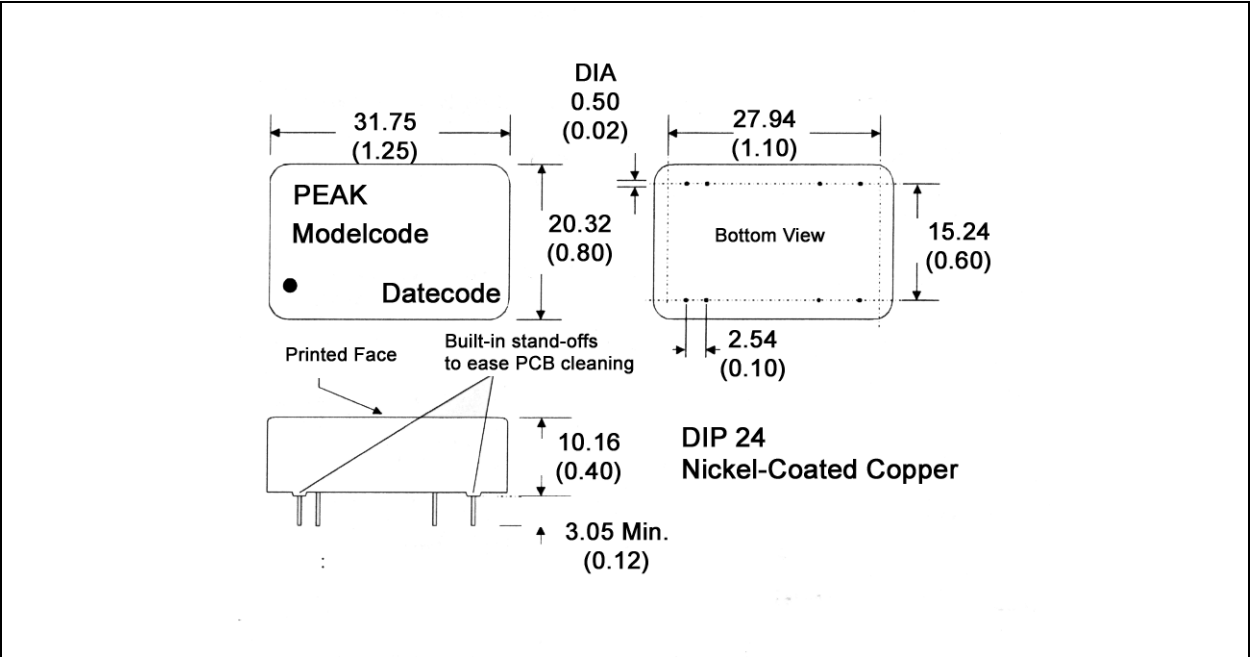

Derating Graph and Pinning

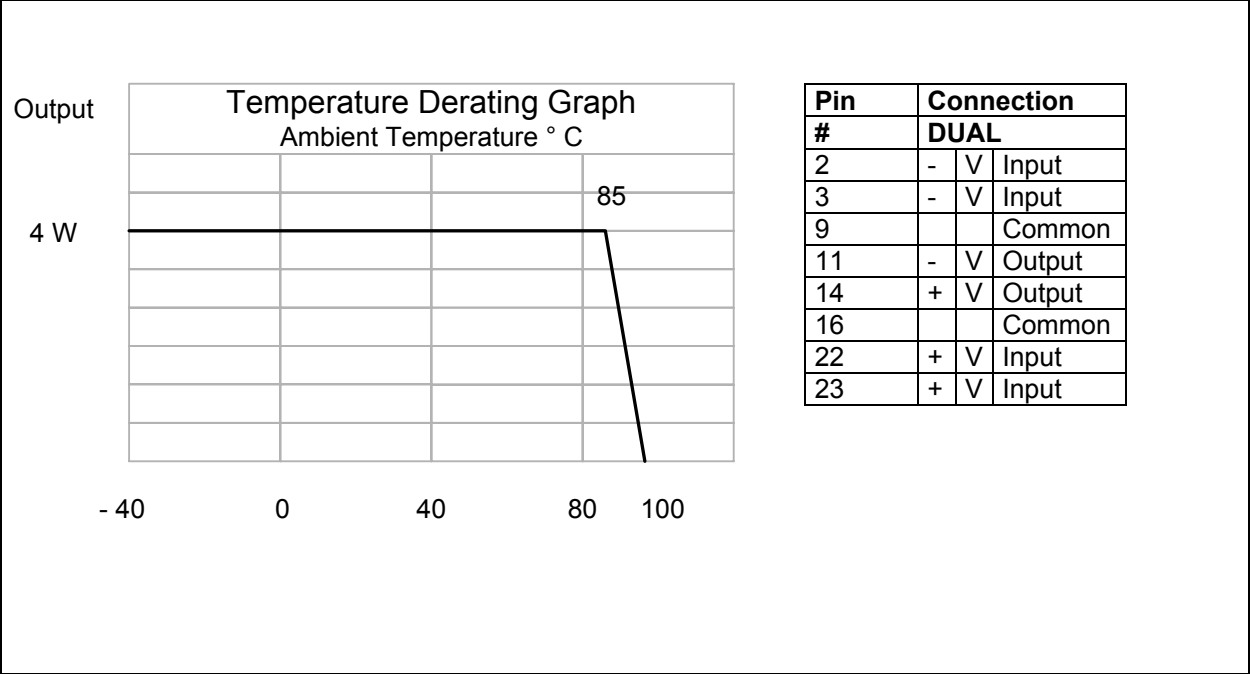

Specification can be changed without notice.

Copyright PEAK electronics GmbH