

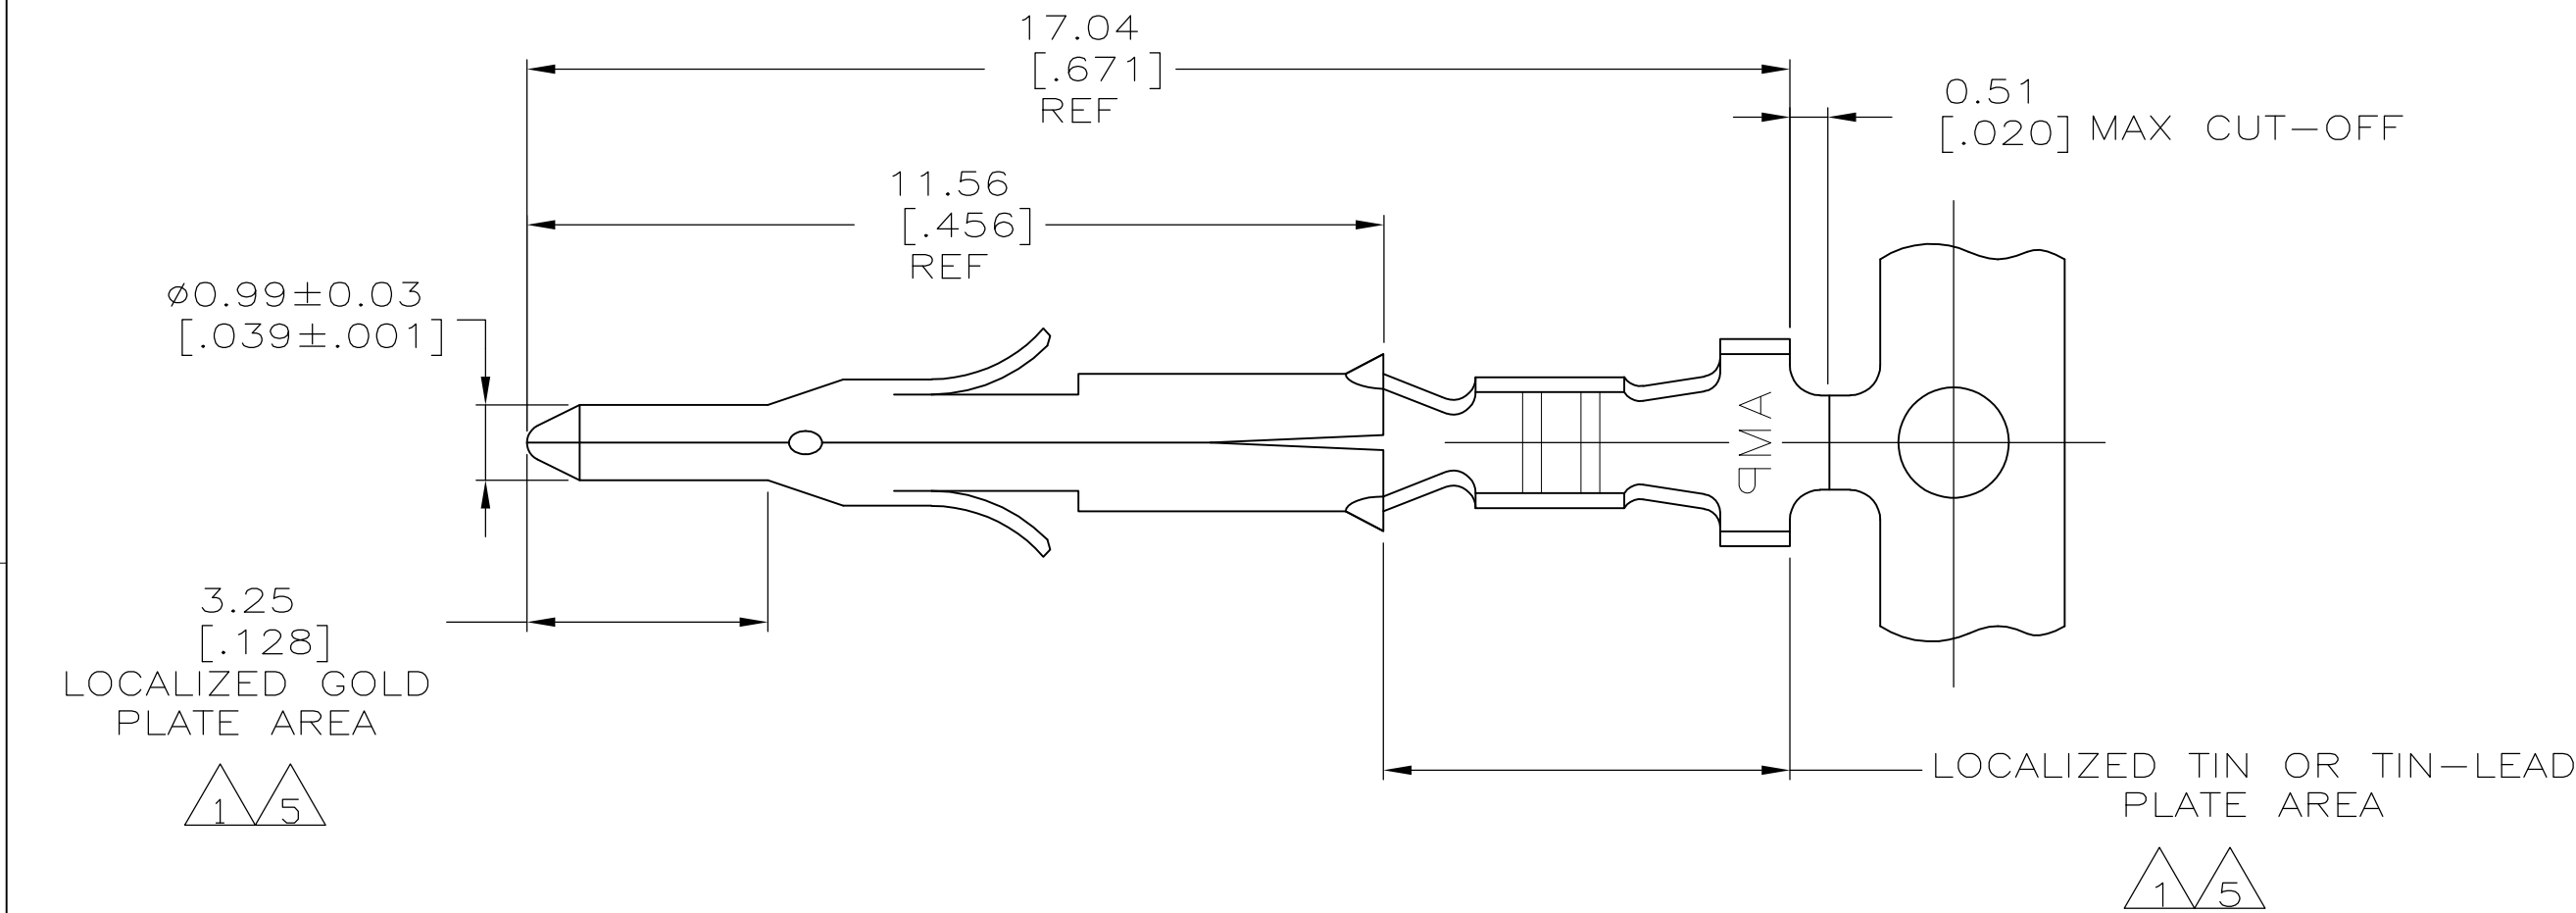



LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
CM	00						
			M1	REVISED PER ECO-11-004820	11MAR11	RK	HMR

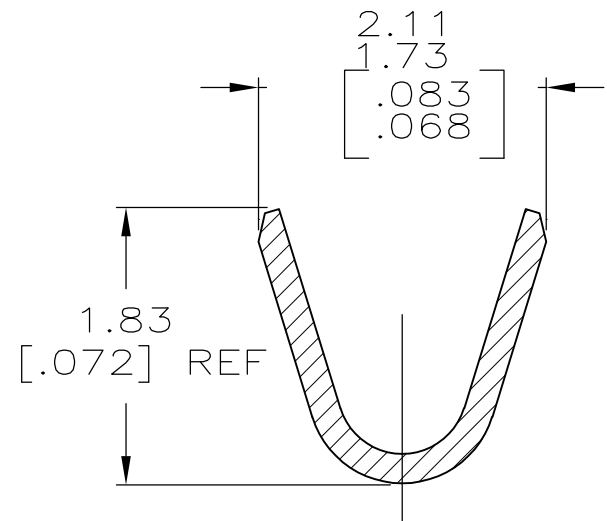

- 1
- 0.00076 [.000030] MIN GOLD IN LOCALIZED GOLD PLATE AREA AND 0.00254 [.000100] MIN BRIGHT TIN-LEAD IN LOCALIZED TIN-LEAD PLATE AREA OVER 0.00130 [.000050] MIN NICKEL.
- 2
- WIRE RANGE: 0.12 – 0.4mm² (26–22 AWG).
- 3
- INSULATION RANGE: 1.20–1.75[.047–.069] DIA.
- 4
- DIMENSIONS IN BRACKETS ARE IN INCHES.
- 5
- 0.00076 [.000030] MIN GOLD IN LOCALIZED GOLD PLATE AREA AND 0.00254 [.000100] MIN BRIGHT TIN IN LOCALIZED TIN PLATE AREA OVER 0.00130 [.000050] MIN NICKEL.

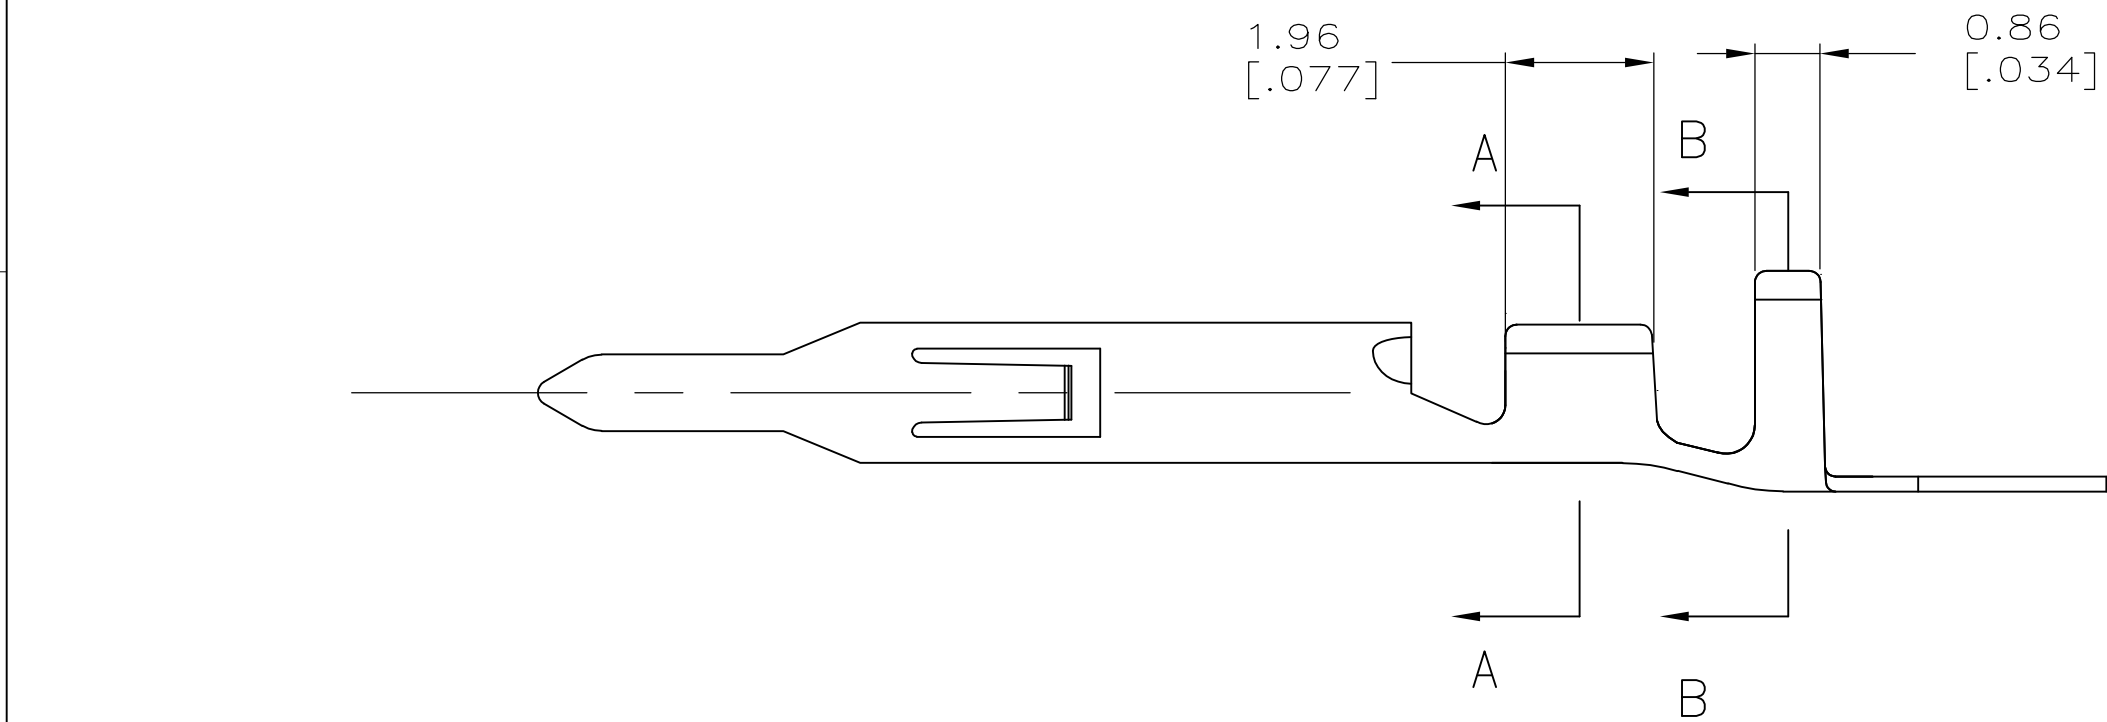

SECTION A—A
SCALE 20:1

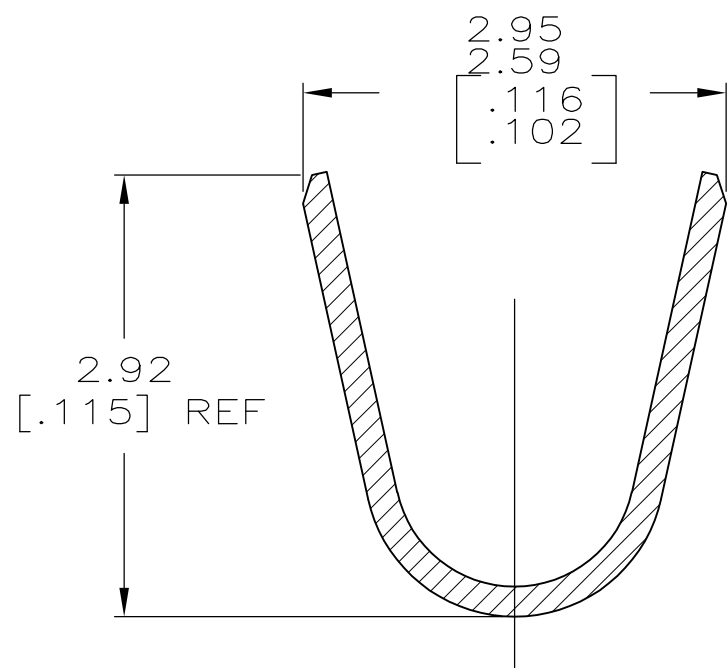

SECTION B—B
SCALE 20:1

5	0.20 [.008] BRASS	1–770901–0
1	0.20 [.008] BRASS	770901–3
PRE–TIN	0.20 [.008] BRASS	770901–1
FINISH	MATERIAL	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S.HOOVER 05MAR03	 TE Connectivity			
		CHK C.JONES 05MAR03				
DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD C.JONES 05MAR03	NAME PIN MINI UNIVERSAL MATE–N–LOK(TM)			
		PRODUCT SPEC —				
	0 PLC ± — 1 PLC ± — 2 PLC ± 0.13[.005] 3 PLC ± — 4 PLC ± — ANGLES ± —	APPLICATION SPEC —	SIZE A2			
		—				
MATERIAL —	FINISH —	WEIGHT —	CAGE CODE 00779	DRAWING NO C=770901	RESTRICTED TO —	
CUSTOMER DRAWING			SCALE 10:1	SHEET 1 of 1	REV M1	