

ZFKDSA 10-15,00- 4 - 1709303

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




PCB terminal block, nominal current: 76 A, nom. voltage: 1000 V, pitch: 15 mm, number of positions: 4, connection method: Spring-cage connection, mounting: Wave soldering, conductor/PCB connection direction: 45 °, color: green

The figure shows a 5-pos. version of the product

Your advantages

- ✓ Defined contact force ensures that contact remains stable over the long term
- ✓ Clamping space opened by means of fixed screwdriver enables convenient conductor connection
- ✓ Separate bridge shaft for easily connecting multiple positions to jumpers
- ✓ Quick and convenient testing using integrated test option

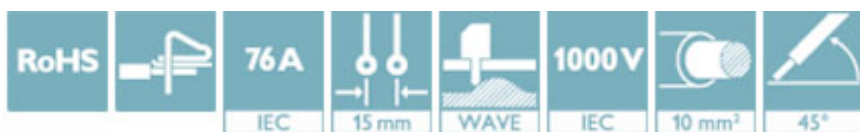

Key Commercial Data

Packing unit	50 pc
GTIN	 4 055626 058061
GTIN	4055626058061

Technical data

Dimensions

Length [l]	33.4 mm
Pitch	15 mm
Dimension a	45 mm
Width [w]	61.7 mm
Height	27 mm
Height [h]	33.5 mm
Solder pin [P]	6.5 mm
Pin spacing	15 mm
Hole diameter	2.2 mm

General

Range of articles	ZFKDS(A) 10
-------------------	-------------

ZFKDSA 10-15,00- 4 - 1709303

Technical data

General

Rated surge voltage (III/3)	8 kV
Rated surge voltage (III/2)	8 kV
Rated surge voltage (II/2)	8 kV
Rated voltage (III/3)	1000 V
Rated voltage (III/2)	1000 V
Rated voltage (II/2)	1000 V
Connection in acc. with standard	EN-VDE
Nominal current I_N	76 A
Nominal cross section	10 mm ²
Stripping length	12 mm
Number of positions	4

Connection data

Conductor cross section AWG min.	24
Conductor cross section AWG max.	6

Standards and Regulations

Connection in acc. with standard	EN-VDE
----------------------------------	--------

Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Approvals

Approvals

Approvals

IECEE CB Scheme / VDE Gutachten mit Fertigungsüberwachung / EAC

Ex Approvals

Approval details

IECEE CB Scheme	CB scheme	http://www.iecee.org/	DE-51235
Nominal voltage U_N	1000 V		
Nominal current I_N	76 A		
mm ² /AWG/kcmil	0.2-16		

ZFKDSA 10-15,00- 4 - 1709303

Approvals

VDE Gutachten mit Fertigungsüberwachung		http://www2.vde.com/de/Institut/Online-Service/ VDE-gepruefteProdukte/Seiten/Online-Suche.aspx	40036082
Nominal voltage UN		1000 V	
Nominal current IN		76 A	
mm²/AWG/kcmil		0.2-16	

EAC		B.01742
-----	---	---------

Phoenix Contact 2018 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>