
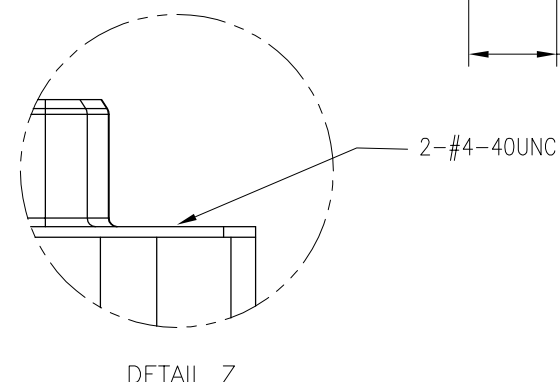
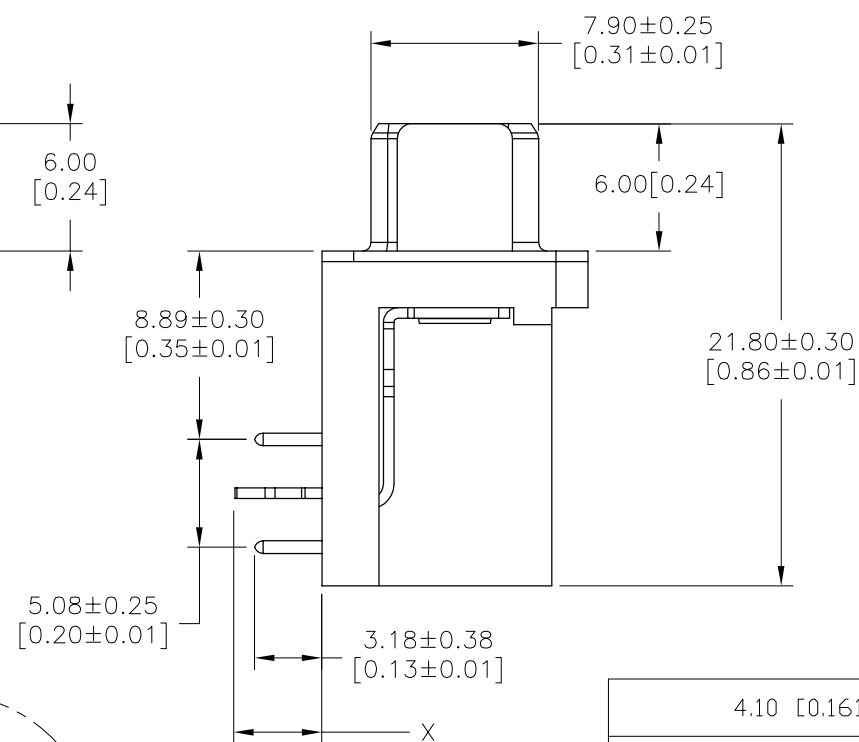
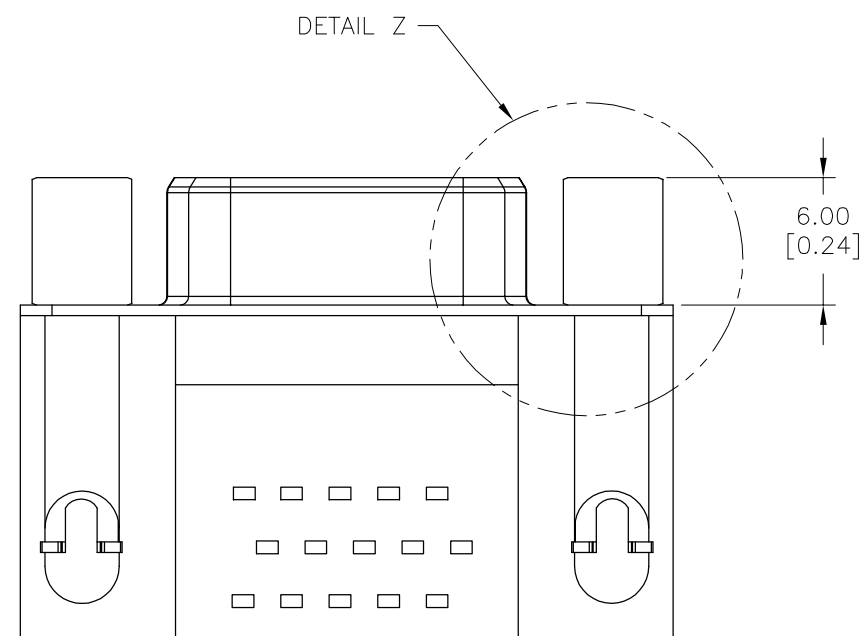


INSULATOR:PA9T+G.F UL94V-O BLACK
CONTACT:PHOSPHOR BRONZE
" GOLD PLATING ON CONTACT AREA
100u" MATTE TIN PLATING ON SOLDER TAIL
50u" NICKEL UNDERPLATED OVERALL
HOLD DOWN:BRASS,100u" TIN OVER 50u" NICKEL
SHEEL:SPCC,50u" NICKEL PLATING OVERALL
SCREW LOCK:BRASS,30u" NICKEL PLATING OVERALL

— STANDS FOR CALENDAR YEAR
— STANDS FOR WEEK NUMBER

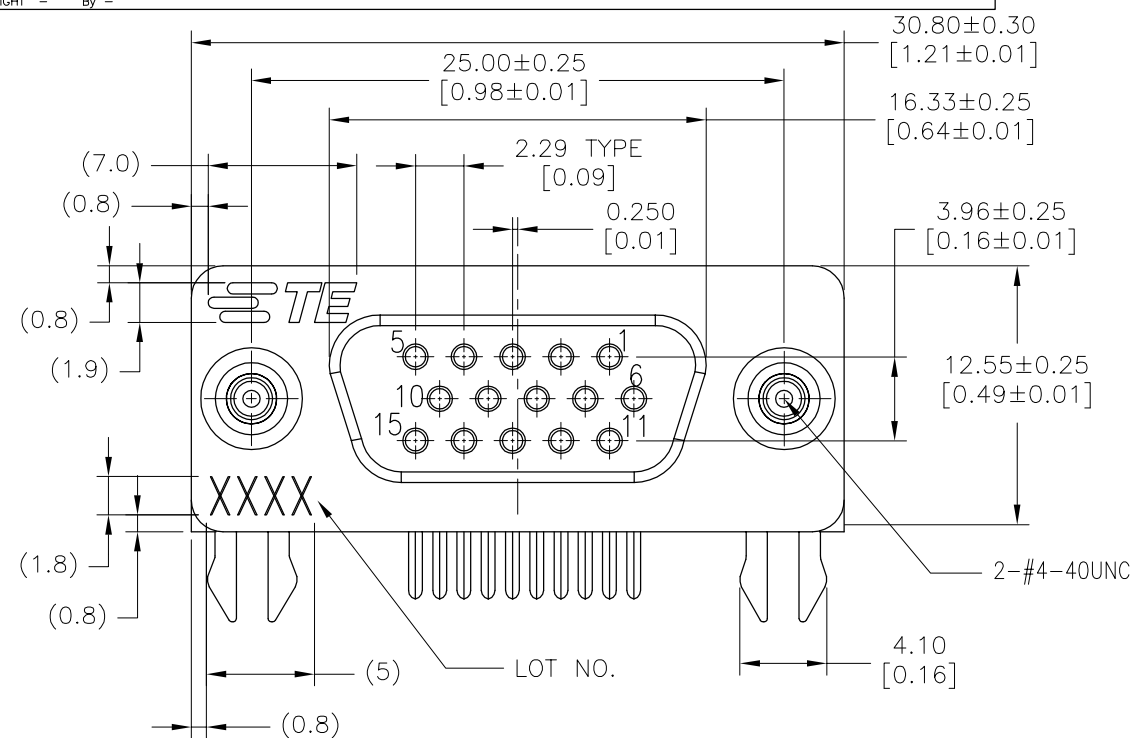

4.10 [0.161]	THREADED SEE DETAIL Z	30μ"Au	2311763-3
4.10 [0.161]	THREADED SEE DETAIL Z	Au Flash	2311763-2
3.80 [0.150]	YES	30μ"Au	2311763-1
X ± 0.30 [± 0.012]	SCREWLOCK	Contact Area	P/N
BOARDLOCK LENGTH		Plating	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN AJITH PAI 03MAR2017		 TE Connectivity	
DIMENSIONS: mm [INCHES]		CHK GORENC, DANIEL L 03MAR2017			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD GORENC, DANIEL L 03MAR2017		NAME AMPLIMITE RECEPTACLE, HD22, RIGHT ANGLE, 15P	
		PRODUCT SPEC 108-130023		—	
0 PLC ± — 1 PLC ± 0.40 2 PLC ± 0.25 3 PLC ± 0.15 4 PLC ± — ANGLES ± 3°		APPLICATION SPEC —		SIZE	CAGE CODE
MATERIAL —		WEIGHT		DRAWING NO	
FINISH —		CUSTOMER DRAWING		RESTRICTED TO —	
				A2	00779
				C-2311763	
				SCALE	1.1
				SHEET	1 of 1
				REV	D