


PCB terminal block - SPT 5/ 4-V-7,5-ZB MC GN/YE-BK - 1712831

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)

PCB terminal block, nominal current: 41 A, pitch: 7.5 mm, number of positions: 4, connection method: Push-in spring connection, mounting: Wave soldering, color: multi-color

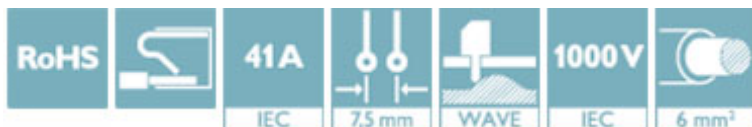

Key Commercial Data

Packing unit	50 pc
GTIN	
GTIN	4055626297279

Technical data

Item properties

Number of positions	4
Pin layout	Zigzag pinning W

Dimensions for the product

Width [w]	16.8 mm
Height [h]	19 mm
Pitch	7.5 mm
Height (without solder pin)	14.4 mm
Solder pin [P]	4.6 mm
Pin spacing	14 mm
Dimension a	22.5 mm

Dimensions for PCB design

Hole diameter	2.1 mm
Pin spacing	14 mm

Packaging information

Type of packaging	packed in cardboard
Pieces per package	50
Denomination packing units	Pcs.

Standards and Regulations

Flammability rating according to UL 94	V0
--	----

Environmental Product Compliance

PCB terminal block - SPT 5/ 4-V-7,5-ZB MC GN/YE-BK - 1712831

Technical data

Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Approvals

Approvals

Approvals

CCA / IECCEB Scheme / SEV / EAC / cULus Recognized

Ex Approvals

Approval details

CCA	IK-2956
Nominal voltage UN	1000 V
Nominal current IN	41 A
mm ² /AWG/kcmil	6

IECEE CB Scheme			http://www.iecee.org/	CH-7429
Nominal voltage UN		1000 V		
Nominal current IN		41 A		
mm²/AWG/kcmil		6		

SEV		https://www.electrosuisse.ch/de/meta/shop/produktezertifikate.html	IK-3150
Nominal voltage UN	1000 V		
Nominal current IN	41 A		
mm²/AWG/kcmil	6		

EAC		B.01742
-----	---	---------

PCB terminal block - SPT 5/ 4-V-7,5-ZB MC GN/YE-BK - 1712831

Approvals

cULus Recognized  http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm E60425-20061129		
	B	C
Nominal voltage UN	600 V	600 V
Nominal current IN	36 A	36 A
mm²/AWG/kcmil	24-8	24-8

Phoenix Contact 2018 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>